


QUARTZ CRYSTALS



32,768 kHz

SMD-version

model	KX - 327ST
frequency	32,768 kHz
operating temperature	-40° ~ +85°C
frequency tolerance at +25°C	± 30 ppm
temperature tolerance at -20° ~ +70°C	-0,034 ±0,006 ppm/°C ² typ
capacity load C _L	12,5 pF
series resonance R ₁ max.	50k Ohm
aging (first year)	± 5 ppm
shunt capacitance C ₀ max.	2 pF
drive level in mW	0,01
contents of reel	3000 pcs.
order no.	12.87111

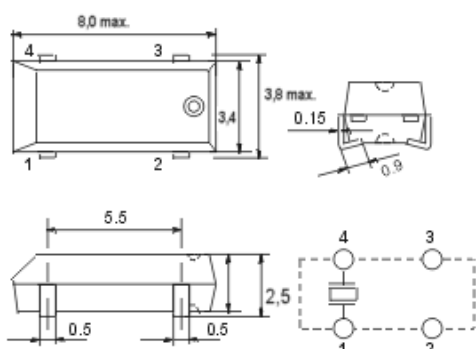

SUGGESTED SOLDERING PAD

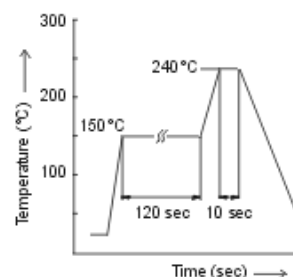

soldering condition

