
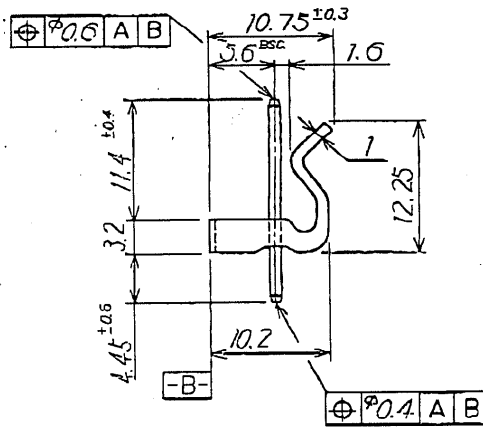



39-26-3**0 SD-5414-NA

5028-N (NYLON 66, 94V-2)

2161-01 (1.14 x 19.05 BRASS, TIN OVER COPPER PLATING)

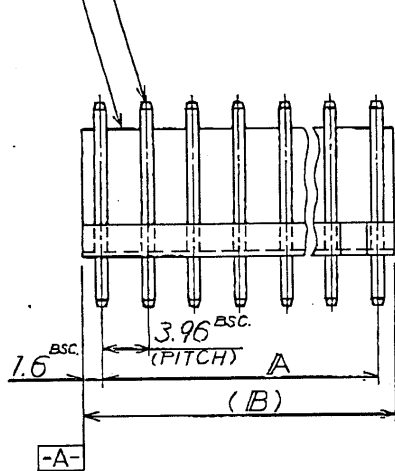

NOTE: 1. CAMBER MUST BE WITHIN 0.24 MAX. PER 25.4



RECOMMENDED
PCB HOLE DIM.

DIMENSIONS IN METRIC DO NOT SCALE DRAWING

度 ANGLE	± 3'
30 以上 OVER	± 0.3
10 OVER 30 未満 UNDER	± 0.25
10 未満 UNDER	± 0.2
GENERAL TOLERANCES	

15	39-26-3150	5414-15A	55.44	58.64	
14	-3140	-14A	51.48	54.68	
13	-3130	-13A	47.52	50.72	
12	-3120	-12A	43.56	46.76	
11	-3110	-11A	39.6	42.8	
10	-3100	-10A	35.64	38.84	
9	-3090	-09A	31.68	34.88	
8	-3080	-08A	27.72	30.92	
7	-3070	-07A	23.76	26.96	
6	-3060	-06A	19.8	23	
5	-3050	-05A	15.84	19.04	
4	-3040	-04A	11.88	15.08	
3	-3030	-03A	7.92	11.12	
2	39-26-3020	5414-02A	3.96	7.16	

NO. OF PAGES	EDP NO.	ENG. NO.	A	(B)	REMARKS
MATERIAL					
FINISH					
WIRE RANGE					
INS. RANGE					
DRAWN BY Y. TAKENOCHI					
APP'D BY					
DATE					
SCALE 2-1					

MOLEX-JAPAN CO., LTD.
日本モレックス株式会社

EDP NO.
39-26-3**0

ENG. NO.
SD-5414-NA

TITLE 名称:
KK3.96 WAFER ASS'Y
WITH LOCK

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX/JAPAN AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
本図面は日本モレックス株式会社の所有する情報を含むもので当社の許可なく複製を禁じます。
JEN-01(018) MXJ-7