



SNAP-IN TYPE ALUMINUM ELECTROLYTIC CAPACITORS

CAT. No. E1001F (Ver.2)

INDEX		
PRODUCT SEARCH	SERIES TABLE	➡
	GROUP CHART	➡
PRODUCTION GUIDE	PRECAUTIONS AND GUIDELINES (Aluminum Electrolytic Capacitor)	➡
	PART NUMBERING SYSTEM	➡
	ENVIRONMENTAL CONSIDERATION	➡
	PACKAGING	➡
	AVAILABLE TERMINALS FOR SNAP-IN TYPE	➡
	STANDARDIZATION	➡
	WORLD-WIDE MANUFACTURING LOCATIONS	➡
PRODUCT SPECIFICATIONS	SNAP-IN TYPE	➡
RELIABILITY DATA		➡
APPENDIX (GLOBAL CODE)		➡

Series		Features	Endurance (+R=With ripple)	Standard type	Low impedance	Solvent-proof	Terminal type	Rated voltage range (V _{dc})	Capacitance range (μF)
Conductive Polymer Electrolyte Type	PXE (NEW!)	Vertical type, super low ESR, high ripple current	105°C 2,000 hours		●	●	SMD	2.5 to 16	33 to 1,200
	PXC	Vertical type, super low ESR	105°C 1,000 hours		●	●	SMD	2.5 to 16	27 to 470
	PXA (Upgrade!)	Vertical type, super low ESR	105°C 2,000 hours		●	●	SMD	2.5 to 25	3.3 to 1,500
	PXH	125°C Vertical type	125°C 1,000 hours		●	●	SMD	2.5 to 20	22 to 1,000
	PSC (NEW!)	Radial lead type, super low ESR, high ripple current	105°C 2,000 hours		●	●	Radial	2.5 to 16	330 to 2,700
	PSA	Super low ESR, high ripple current	105°C 2,000 hours		●	●	Radial	2.5 to 16	100 to 1,000
	PS	Super low ESR, high ripple current	105°C 2,000 hours		●	●	Radial	2.5 to 25	68 to 1,500
Surface Mount	Vertical Type	MVS	4.5mm height	85°C 2,000 hours	●	●	SMD	4 to 50	0.1 to 220
		MVA	5.5 to 22.0mm max. height, downsized	85°C 2,000 hours		▲	SMD	4 to 450	0.1 to 10,000
		MV	5.5 to 10.5mm max. height	85°C 1,000 to 2,000 hours	●	●	SMD	4 to 63	0.1 to 1,000
		MVE	5.5 to 22.0mm max. height, downsized	105°C 1,000 to 2,000 hours		▲	SMD	6.3 to 450	0.47 to 6,800
		MVK	5.5 to 10.5mm max. height	105°C 1,000 to 2,000 hours	●	●	SMD	6.3 to 50	0.1 to 1,000
		MKA	5.5 to 10.5mm max. height	105°C 1,000 to 2,000 hours		●	SMD	6.3 to 50	0.1 to 1,000
		MZA (Upgrade!)	6.1 to 10.5mm max. height, very low impedance	105°C 2,000 hours		●	SMD	6.3 to 80	3.3 to 1,500
		MVY	5.5 to 22.0mm max. height	105°C 1,000 to 5,000 hours		▲	SMD	6.3 to 100	1.0 to 8,200
		MZD (NEW!)	105°C 5,000 hours, low impedance, long life (Ask Engineering Bulletin No758 in detail)	105°C 5,000 hours		●	SMD	6.3 to 50	10 to 470
		MLA (NEW!)	Low impedance, long life	105°C 3,000 hours		●	SMD	6.3 to 50	10 to 1,000
		MVJ	6.0mm max. height (Ask Engineering Bulletin No653 in detail)	105°C 2,000 hours		●	SMD	6.3 to 50	0.1 to 100
		MLD (NEW!)	105°C 5,000 hours, long life (Ask Engineering Bulletin No759 in detail)	105°C 5,000 hours		●	SMD	6.3 to 50	0.1 to 1,000
		MVL	6.0 to 10.5mm max. height	105°C 3,000 to 5,000 hours		●	SMD	6.3 to 50	0.1 to 1,000
		MVH (Upgrade!)	6.0 to 22.0mm max. height	125°C 1,000 to 5,000 hours		▲	SMD	10 to 450	3.3 to 4,700
		MV-BP	5.5mm max. height, bi-polar	85°C 2,000 hours		●	SMD	4 to 50	0.1 to 47
		MVK-BP	6.0mm max. height, bi-polar	105°C 1,000 hours		●	SMD	6.3 to 50	0.1 to 47
Miniature	Low Profile	SRM	5mm height, downsized	85°C 1,000 hours		●	Radial	4 to 50	0.1 to 330
		SRE	5mm height	85°C 1,000 hours	●		Radial	4 to 50	0.1 to 100
		KRE	5mm height	105°C 1,000 hours	●	●	Radial	6.3 to 50	0.1 to 100
		SRA	7mm height	85°C 1,000 hours	●		Radial	4 to 63	0.1 to 470
		KMA	7mm height	105°C 1,000 hours	●	●	Radial	4 to 63	0.1 to 220
		SRG	φ4×7 to φ18×25mm, low profile	85°C 1,000 to 2,000 hours		●	Radial	4 to 50	0.1 to 10,000
		KRG	φ4×7 to φ18×25mm, low profile	105°C 1,000 hours		●	Radial	6.3 to 50	0.1 to 10,000
	General Purpose	SMQ	Downsized	85°C 2,000 hours	●		Radial	6.3 to 450	0.1 to 47,000
		KMQ	Downsized	105°C 1,000 to 2,000 hours +R	●	▲	Radial	6.3 to 450	0.1 to 47,000
		SMG	General, downsized	85°C 2,000 hours	●	▲	Radial	6.3 to 450	0.1 to 39,000
		KMG	General, downsized	105°C 1,000 to 2,000 hours +R	●	▲	Radial	6.3 to 450	0.1 to 22,000
		SME	General (Ask Engineering Bulletin No511 in detail)	85°C 2,000 hours		▲	Radial	6.3 to 450	0.1 to 15,000
		KME	General (Ask Engineering Bulletin No512 in detail)	105°C 1,000 hours +R		▲	Radial	6.3 to 400	0.1 to 15,000
		SME-BP	Bi-polar, general	85°C 2,000 hours	●	●	Radial	6.3 to 100	0.47 to 6,800
		KME-BP	Bi-polar, general	105°C 1,000 hours	●	●	Radial	6.3 to 100	0.47 to 6,800
	High Frequency Use	KZM (NEW!)	Lowest impedance, long life	105°C 6,000 to 10,000 hours +R		●	Radial	6.3 to 35	27 to 10,000
		KZH	Lowest impedance, long life	105°C 5,000 to 6,000 hours +R		●	Radial	6.3 to 35	47 to 8,200
		KZE	Lowest impedance, long life	105°C 1,000 to 5,000 hours +R		●	Radial	6.3 to 100	6.8 to 6,800
		KY (Upgrade!)	Low impedance, long life	105°C 4,000 to 10,000 hours +R		●	Radial	6.3 to 100	0.47 to 18,000
		LXZ	Low impedance, downsized	105°C 2,000 to 8,000 hours +R		●	Radial	6.3 to 63	12 to 18,000
		LXY	Low impedance, high reliability	105°C 2,000 to 8,000 hours +R	●	●	Radial	10 to 63	10 to 8,200
		LXV	Low impedance	105°C 2,000 to 5,000 hours +R		●	Radial	6.3 to 100	5.6 to 15,000
		KMF	Low impedance, high CV, general (Ask Engineering Bulletin No630 in detail)	105°C 2,000 hours +R		●	Radial	160 to 450	2.2 to 220

■ : Promotional products

▲ : Some of range are solvent-proof.


Series			Features	Endurance (+R=With ripple)	Standard type	Low impedance	Solvent-proof	Terminal type	Rated voltage range (V _{dc})	Capacitance range (μF)
Miniature	High Reliability	KXJ (NEW)	Downsized, long life, for input filtering	105°C 10,000 to 12,000 hours +R		●		Radial	160 to 400	10 to 680
		KXG	Downsized, long life, for input filtering	105°C 8,000 to 10,000 hours +R		●		Radial	160 to 450	6.8 to 330
		KMX	Long life, for input filtering (Ask Engineering Bulletin No 646 in detail)	105°C 8,000 to 10,000 hours +R		●		Radial	160 to 450	3.3 to 680
		SMH	φ20×20 to φ22×50mm	85°C 2,000 hours +R	●			Radial	160 to 450	33 to 470
		KMH	φ20×20 to φ22×50mm	105°C 2,000 hours +R	●			Radial	160 to 450	33 to 470
		PAG	Low profile, for input filtering	105°C 2,000 hours +R				Radial	200 to 450	18 to 560
		KLJ (NEW)	Downsized, no sparks with DC overvoltage	105°C 2,000 hours +R				Radial	200 & 400	4.7 to 330
		KLG	No sparks with DC overvoltage	105°C 2,000 hours +R				Radial	200 & 400	22 to 330
		FL	Long life	105°C 3,000 hours +R			●	Radial	6.3 to 50	0.47 to 270
		GPA (NEW)	125°C, downsized, low impedance	125°C 3,000 to 5,000 hours +R		●	●	Radial	25 to 63	330 to 6,800
		GXE	125°C, downsize, low impedance	125°C 2,000 to 5,000 hours +R		●	▲	Radial	10 to 450	4.7 to 4,700
		GXL	125°C Long life	125°C 5,000/10,000 hours +R			●	Radial	10 to 50	100 to 4,700
		GHA (NEW)	150°C (Ask Engineering Bulletin No715 in detail)	150°C 1,000 hours			●	Radial	10 to 100	10 to 10,000
	Special Application	LBG (Upgrade!)	For airbag	105°C 5,000 hours +R		●	●	Radial	25 to 35	1,000 to 11,000
		KZV (NEW)	For PC motherboard (Ask Engineering Bulletin No756 in detail)	105°C 2,000 hours +R		●		Radial	4	820 to 2,700
		KZJ (NEW)	For PC motherboard	105°C 2,000 hours +R		●		Radial	6.3 to 16	470 to 3,300
		KZG	For PC motherboard	105°C 2,000 hours +R		●		Radial	6.3 to 16	470 to 3,300
		LLA	Low DC leakage, general	85°C 1,000 hours			●	Radial	6.3 to 50	0.1 to 15,000
		PH	For photo flash	55°C 5,000 times charging				Radial	300 & 330	—
Large Sized	General Purpose	KMR (NEW)	105°C, Snap-in terminal, super downsized	105°C 2,000 hours +R	●			Pin	160 to 450	100 to 3,900
		SMQ	Snap-in terminal, more downsized	85°C 2,000 hours +R	●			Pin	160 to 450	82 to 3,900
		KMQ (Upgrade!)	Snap-in terminal, more downsized	105°C 2,000 hours +R	●			Pin	160 to 450	68 to 3,300
		SMM	Snap-in terminal, downsized	85°C 3,000 hours +R	●			Pin	35, 50, 160 to 450	47 to 33,000
		KMM	Snap-in terminal, downsized	105°C 2,000 to 3,000 hours +R	●			Pin	160 to 450	39 to 3,300
		SMH	Snap-in terminal, general (Refer Engineering Bulletin No585 for 160 to 450V)	85°C 2,000 hours +R	●			Pin	6.3 to 100	820 to 100,000
		KMH	Snap-in terminal, general (Refer Engineering Bulletin No584 for 160 to 450V)	105°C 2,000 hours +R	●			Pin	6.3 to 100	560 to 82,000
	Low Profile	SLM	15mm height	85°C 2,000 hours +R				Pin	160 to 400	47 to 560
		KLM	15mm height	105°C 2,000 hours +R				Pin	160 to 400	39 to 390
	High Reliability	LXM	Long life	105°C 7,000 hours +R				Pin	160 to 450	47 to 2,200
		LXQ	Long life, downsized	105°C 5,000 hours +R				Pin	160 to 450	82 to 2,700
		LXG	Long life	105°C 5,000 hours +R				Pin	10 to 100	390 to 47,000
		CHA	No sparks with DC overvoltage, downsized	105°C 2,000 hours +R				Pin	200 & 400	56 to 1,200
		LXH	No sparks with DC overvoltage	105°C 3,000/5,000 hours +R				Pin	200 & 400	68 to 1,500
		RWE-LR	For air-conditioning (Ask Engineering Bulletin No768 in detail)	85°C 3,000 hours +R				Lug	250 to 450	330 to 2,200
Screw-mount Terminal Type	General Purpose	SME	Screw terminal, general	85°C 2,000 hours +R	●			Screw	10 to 250	560 to 680,000
		KMH	Screw terminal, general	105°C 2,000 hours +R	●			Screw	10 to 400	180 to 680,000
	For Inverter	RWG (NEW)	85°C, high ripple, downsized, long life	85°C 5,000 hours +R				Screw	350 to 450	1,500 to 18,000
		RWF	High ripple, long life	85°C 5,000 hours +R				Screw	350 to 450	820 to 22,000
		RWE	High ripple	85°C 2,000 hours +R	●			Screw	350 to 550	100 to 12,000
		RWY	High ripple, long life, low cost	85°C 5,000 hours +R				Screw	350 to 450	500 to 14,000
		RWL	High ripple, long life	85°C 20,000 hours +R				Screw	350 to 450	2,200 to 12,000
		FTP	Ellips can shape, high ripple	85°C 5,000 hours +R				Screw	63 to 450	270 to 21,000
		LXA	Long life	105°C 2,000/5,000 hours +R				Screw	10 to 525	330 to 390,000
		LXR	High ripple, long life	105°C 5,000 hours +R				Screw	350 to 450	2,200 to 15,000
		LWY	Low cost (Ask Engineering Bulletin No714 in detail)	105°C 5,000 hours +R				Screw	350 to 450	460 to 13,000
		KW	Low impedance (Ask Engineering Bulletin in detail)	105°C 2,000 hours		●		Screw	10 to 100	1,000 to 100,000

■ : Promotional products


▲ : Some of range are solvent-proof.

CONDUCTIVE POLYMER ALUMINUM SOLID CAPACITORS

◆SURFACE MOUNT

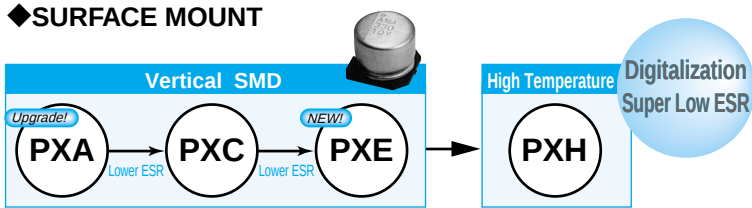


◆RADIAL LEAD

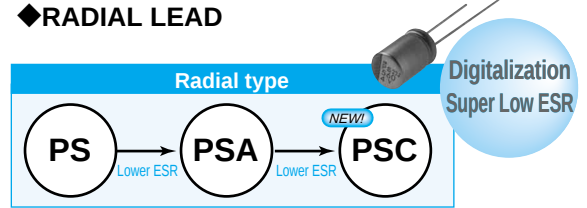


ALUMINUM ELECTROLYTIC CAPACITORS

◆SURFACE MOUNT

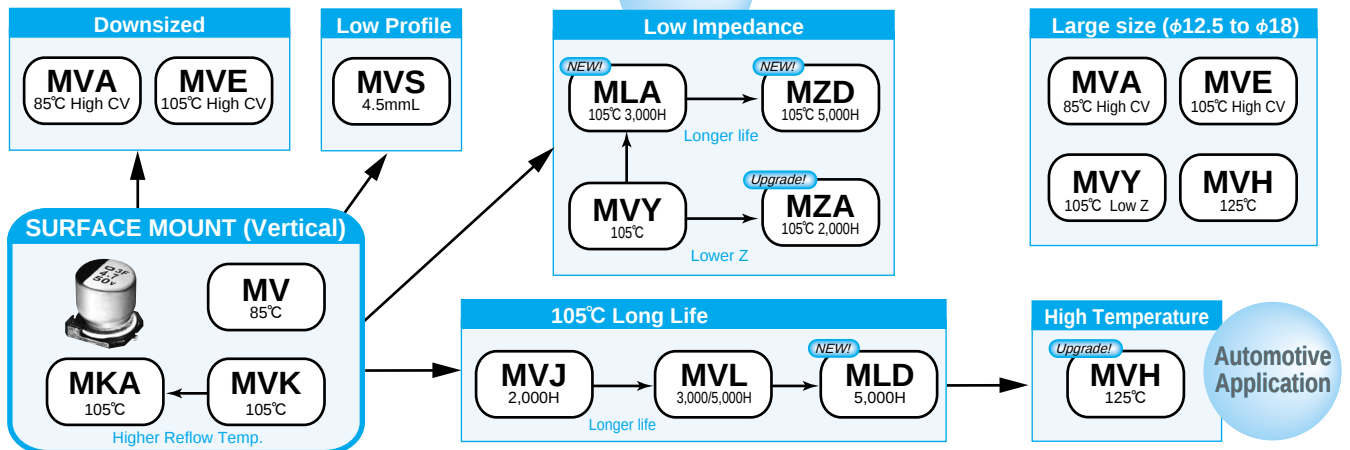


◆RADIAL LEAD

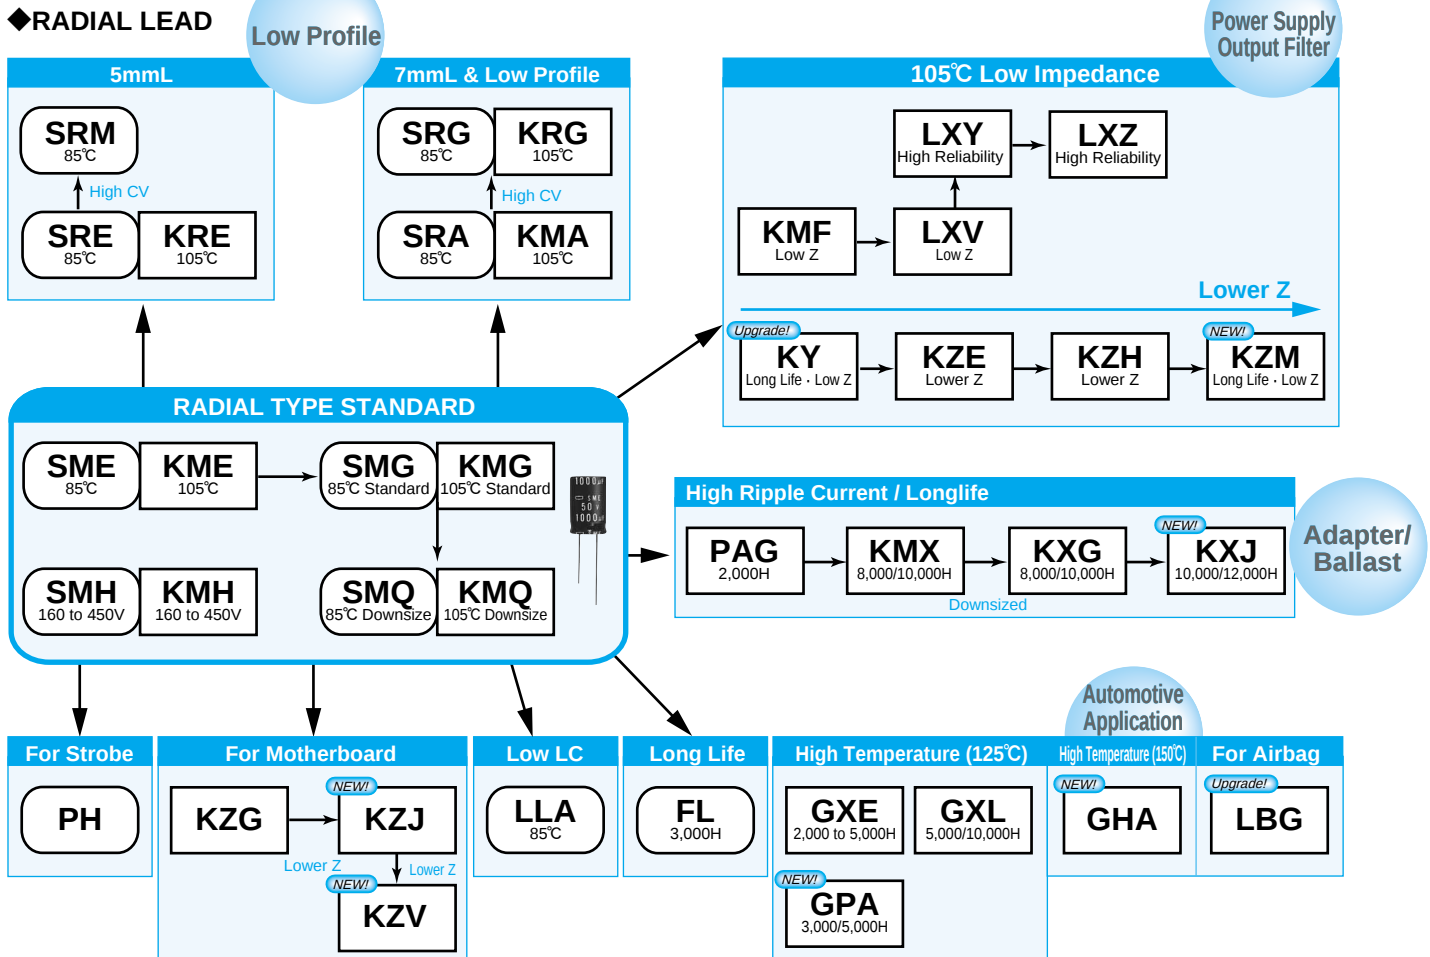


ALUMINUM ELECTROLYTIC CAPACITORS

◆SNAP-IN

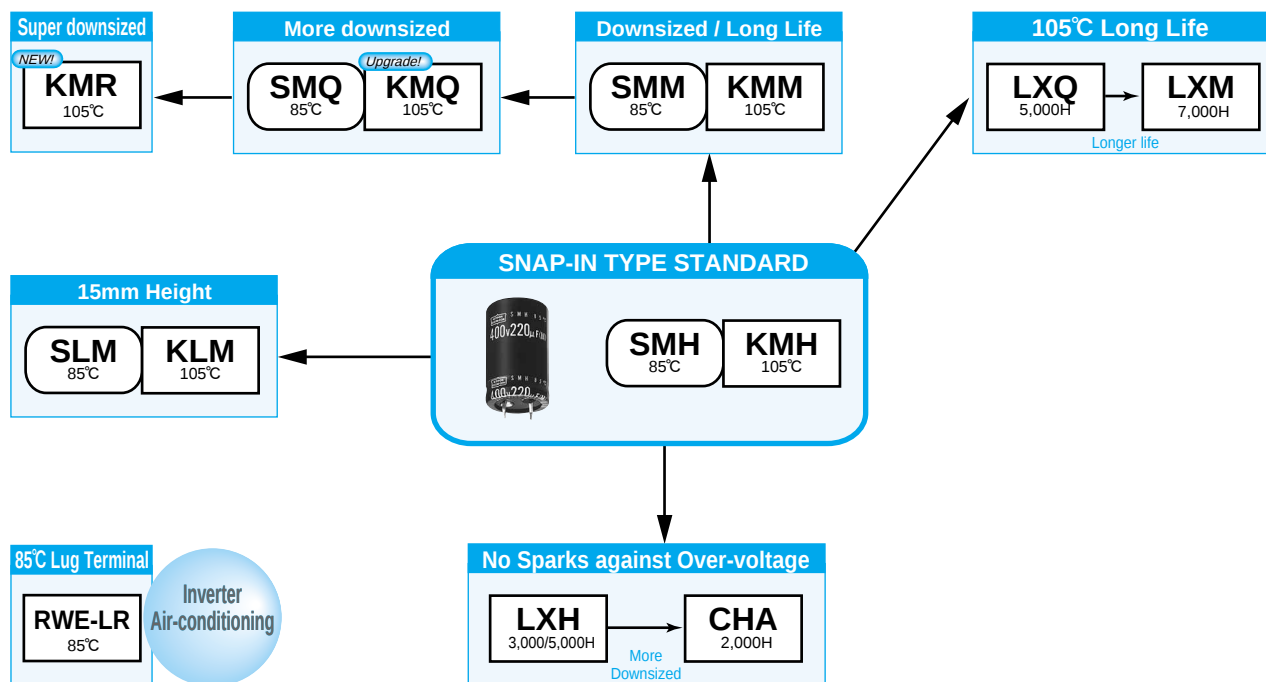

◆SCREW-MOUNT TERMINAL

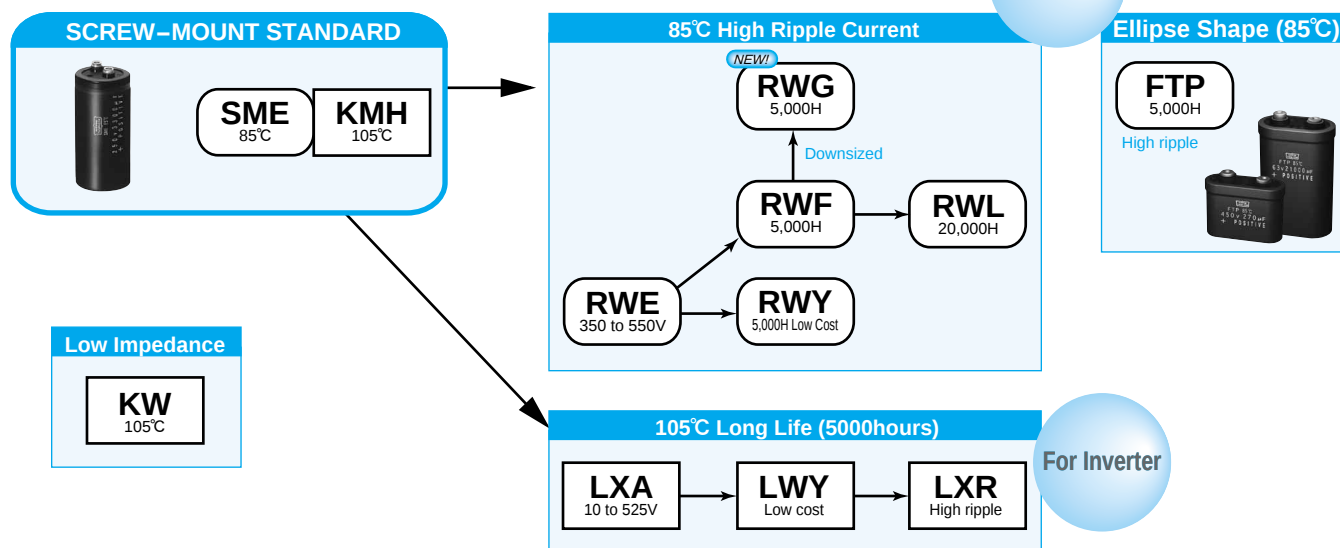

A guide to global code (Snap-in type)

(Example : KMM series, 400V-220 μ F, ϕ 30 $\times$ 30L)

Refer to the following table about global code for snap-in type

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
E	K	M	M	4	0	1	V	S	N	2	2	1	M	R	3	0	S

Supplement code⑨
Size code⑧
Capacitance tolerance⑦
Capacitance code⑥
Dummy terminal code⑤
Terminal code④
Voltage code③
Series code②
Category①

①Category

Type	Code
Polar	E

②Series code

Series name	Code		
	2nd	3rd	4th
KMM	K	M	M
No series name	C	S	T

③Voltage code

Voltage (V)	Code		
	5th	6th	7th
6.3	6	R	3
10	1	0	0
16	1	6	0
25	2	5	0
35	3	5	0
50	5	0	0
63	6	3	0
80	8	0	0
100	1	0	1
160	1	6	1
180	1	8	1
200	2	0	1
220	2	2	1
250	2	5	1
315	3	B	1
350	3	5	1
400	4	0	1
420	4	2	1
450	4	5	1
500	5	0	1

④Terminal code

Type	Code	
	8th	9th
VS	V	S
LI	L	I
LR	L	R
LC	L	C
LA	L	A
VR	V	R

⑤Dummy terminal code

Terminal #	Code
	10th
0	N
1	S
2	D
3	T

⑥Capacitance code

Cap. (μ F)	Code		
	11th	12th	13th
10	1	0	0
22	2	2	0
33	3	3	0
47	4	7	0
68	6	8	0
100	1	0	1
220	2	2	1
330	3	3	1
470	4	7	1
680	6	8	1
1,000	1	0	2
2,200	2	2	2
3,300	3	3	2
4,700	4	7	2
6,800	6	8	2
10,000	1	0	3
22,000	2	2	3
33,000	3	3	3
47,000	4	7	3
68,000	6	8	3
100,000	1	0	4
220,000	2	2	4
330,000	3	3	4
470,000	4	7	4
680,000	6	8	4

⑦Capacitance tolerance

Tol. (%)	Code
	14th
± 20	M

⑧Size code

ϕ D	Code
	15th
20	N
22	P
25.4	Q
30	R
35	A
Others	S

L	Code	
	16th	17th
15	1	5
20	2	0
25	2	5
30	3	0
35	3	5
40	4	0
45	4	5
50	5	0
55	5	5
60	6	0

⑨Supplement code


Sleeve material	Terminal plating material	Code
		18th
PET	Sn100%	S
	Sn-Pb	C
PVC	Sn100%	B
	Sn-Pb	N

* Refer to the appendix (Global code) for codes does not listed.

New!

KMR Series

- Downsized 5mm in height from current snap-ins KMQ series
- Max. 50% up ripple current than same case size of KMQ series
- Endurance with ripple current : 2,000 hours at 105°C
- Rated voltage range : 160 to 450V_W, Capacitance range : 100 to 3,900μF
- For inverter control, switching power supply
- Non solvent-proof type
- RoHS Compliant




SPECIFICATIONS


Items	Characteristics				
Category	Temperature Range				
Temperature Range	-25 to +105°C				
Rated Voltage Range	160 to 450V _{dc}				
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)				
Leakage Current	I≤3√CV Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 5 minutes)				
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	160 to 250V	315 to 400V	420 & 450V	(at 20°C, 120Hz)
	tanδ (Max.)	0.15	0.15	0.20	
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	160 to 250V	315 to 400V	420 & 450V	(at 120Hz)
	Z(-25°C)/Z(+20°C)	4	8	8	
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 105°C.				
	Capacitance change	≤±20% of the initial value			
	D.F. (tanδ)	≤200% of the initial specified value			
	Leakage current	≤The initial specified value			
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1000 hours at 105°C without voltage applied.				
	Capacitance change	≤±15% of the initial value			
	D.F. (tanδ)	≤150% of the initial specified value			
	Leakage current	≤The initial specified value			

DIMENSIONS [mm]

● Terminal Code : VS (φ22 to φ35) : Standard

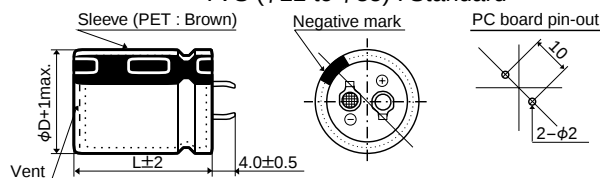


● Terminal Code : LI (φ35)

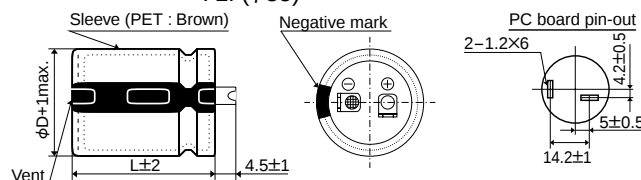

No plastic disk is the standard design.

PART NUMBERING SYSTEM

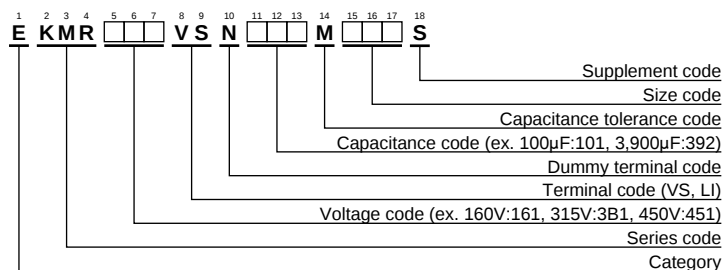

Please refer to "A guide to global code (snap-in type)"

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	Rated ripple current (Arms/105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	Rated ripple current (Arms/105°C,120Hz)	Part No.
160	560	22×25	1.58	EKMR161VSN561MP25S	200	1,800	35×35	2.53	EKMR201VSN182MA35S
	680	22×30	1.83	EKMR161VSN681MP30S		2,200	30×50	3.31	EKMR201VSN222MR50S
	820	22×35	2.06	EKMR161VSN821MP35S		2,200	35×40	2.92	EKMR201VSN222MA40S
	820	25.4×25	1.89	EKMR161VSN821MQ25S		2,700	35×45	3.33	EKMR201VSN272MA45S
	1,000	22×40	2.33	EKMR161VSN102MP40S		2,700	35×50	3.43	EKMR201VSN272MA50S
	1,000	25.4×30	2.15	EKMR161VSN102MQ30S	250	330	22×25	1.21	EKMR251VSN331MP25S
	1,000	30×25	1.90	EKMR161VSN102MR25S		390	22×30	1.38	EKMR251VSN391MP30S
	1,200	22×45	2.61	EKMR161VSN122MP45S		470	22×35	1.56	EKMR251VSN471MP35S
	1,200	22×50	2.69	EKMR161VSN122MP50S		470	25.4×25	1.43	EKMR251VSN471MQ25S
	1,200	25.4×35	2.45	EKMR161VSN122MQ35S		560	22×40	1.74	EKMR251VSN561MP40S
	1,500	25.4×40	2.82	EKMR161VSN152MQ40S		560	25.4×30	1.61	EKMR251VSN561MQ30S
	1,500	25.4×45	2.88	EKMR161VSN152MQ45S		560	30×25	1.42	EKMR251VSN561MR25S
	1,500	30×30	2.39	EKMR161VSN152MR30S		680	22×45	1.97	EKMR251VSN681MP45S
	1,500	35×25	2.17	EKMR161VSN152MA25S		680	25.4×35	1.85	EKMR251VSN681MQ35S
	1,800	25.4×50	3.22	EKMR161VSN182MQ50S		820	22×50	2.22	EKMR251VSN821MA25S
	1,800	30×35	2.73	EKMR161VSN182MR35S		820	25.4×40	2.08	EKMR251VSN821MQ40S
	1,800	30×40	2.82	EKMR161VSN182MR40S		820	25.4×45	2.13	EKMR251VSN821MQ45S
	1,800	35×30	2.47	EKMR161VSN182MA30S		820	30×30	1.77	EKMR251VSN821MR30S
	2,200	30×45	3.23	EKMR161VSN222MA45S		820	35×25	1.60	EKMR251VSN821MA25S
	2,200	35×35	2.79	EKMR161VSN222MA35S		1,000	25.4×50	2.40	EKMR251VSN102MQ50S
	2,700	30×50	3.66	EKMR161VSN272MR50S		1,000	30×35	2.03	EKMR251VSN102MR35S
	2,700	35×40	3.23	EKMR161VSN272MA40S		1,200	30×40	2.31	EKMR251VSN122MR40S
	3,300	35×45	3.68	EKMR161VSN332MA45S		1,200	30×45	2.38	EKMR251VSN122MR45S
	3,900	35×50	4.12	EKMR161VSN392MA50S		1,200	35×30	2.02	EKMR251VSN122MA30S
180	470	22×25	1.45	EKMR181VSN471MP25S		1,200	35×35	2.06	EKMR251VSN122MA35S
	560	22×30	1.66	EKMR181VSN561MP30S	315	1,500	30×50	2.73	EKMR251VSN152MR50S
	680	22×35	1.87	EKMR181VSN681MP35S		1,500	35×40	2.41	EKMR251VSN152MA40S
	680	25.4×25	1.72	EKMR181VSN681MQ25S		1,800	35×45	2.72	EKMR251VSN182MA45S
	820	22×40	2.11	EKMR181VSN821MP40S		2,200	35×50	3.10	EKMR251VSN222MA50S
	820	25.4×30	1.94	EKMR181VSN821MQ30S		180	22×25	0.91	EKMR3B1VSN181MP25S
	1,000	22×45	2.38	EKMR181VSN102MP45S		220	22×30	1.06	EKMR3B1VSN221MP30S
	1,000	25.4×35	2.24	EKMR181VSN102MQ35S		270	22×35	1.20	EKMR3B1VSN271MP35S
	1,000	30×25	1.90	EKMR181VSN102MR25S		270	25.4×25	1.15	EKMR3B1VSN271MQ25S
	1,200	22×50	2.69	EKMR181VSN122MP50S		330	22×40	1.37	EKMR3B1VSN331MP40S
	1,200	25.4×40	2.52	EKMR181VSN122MQ40S		330	25.4×30	1.30	EKMR3B1VSN331MQ30S
	1,200	30×30	2.14	EKMR181VSN122MR30S		390	22×45	1.52	EKMR3B1VSN391MP45S
	1,200	35×25	1.94	EKMR181VSN122MA25S		390	25.4×35	1.48	EKMR3B1VSN391MQ35S
	1,500	25.4×45	2.88	EKMR181VSN152MQ45S		390	30×25	1.39	EKMR3B1VSN391MR25S
	1,500	25.4×50	2.94	EKMR181VSN152MQ50S		470	22×50	1.72	EKMR3B1VSN471MP50S
	1,500	30×35	2.49	EKMR181VSN152MR35S		470	25.4×40	1.67	EKMR3B1VSN471MQ40S
	1,800	30×40	2.82	EKMR181VSN182MR40S		470	30×30	1.57	EKMR3B1VSN471MR30S
	1,800	35×30	2.47	EKMR181VSN182MA30S		470	35×25	1.52	EKMR3B1VSN471MA25S
	2,200	30×45	3.23	EKMR181VSN222MR45S		560	25.4×45	1.86	EKMR3B1VSN561MQ45S
	2,200	30×50	3.31	EKMR181VSN222MR50S	350	560	30×35	1.78	EKMR3B1VSN561MR35S
	2,200	35×35	2.79	EKMR181VSN222MA35S		680	25.4×50	2.10	EKMR3B1VSN681MQ50S
200	2,200	35×40	2.92	EKMR181VSN222MA40S		680	30×40	2.03	EKMR3B1VSN681MR40S
	2,700	35×45	3.33	EKMR181VSN272MA45S		680	35×30	1.90	EKMR3B1VSN681MA30S
	3,300	35×50	3.79	EKMR181VSN332MA50S		820	30×45	2.31	EKMR3B1VSN821MP45S
	470	22×25	1.45	EKMR201VSN471MP25S		820	35×35	2.13	EKMR3B1VSN821MA35S
	560	22×30	1.66	EKMR201VSN561MP30S		1,000	30×50	2.61	EKMR3B1VSN102MR50S
	560	25.4×25	1.56	EKMR201VSN561MQ25S		1,000	35×40	2.46	EKMR3B1VSN102MA40S
	680	22×35	1.87	EKMR201VSN681MP35S		1,200	35×45	2.78	EKMR3B1VSN122MA45S
	680	25.4×30	1.77	EKMR201VSN681MQ30S		1,200	35×50	2.86	EKMR3B1VSN122MA50S
	820	22×40	2.11	EKMR201VSN821MP40S		150	22×25	0.84	EKMR351VSN151MP25S
	820	25.4×35	2.03	EKMR201VSN821MQ35S		220	22×30	1.06	EKMR351VSN221MP30S
	820	30×25	1.72	EKMR201VSN821MR25S		220	25.4×25	1.04	EKMR351VSN221MQ25S
	1,000	22×45	2.38	EKMR201VSN102MP45S		270	22×35	1.20	EKMR351VSN271MP35S
	1,000	22×50	2.45	EKMR201VSN102MP50S		270	25.4×30	1.18	EKMR351VSN271MQ30S
	1,000	25.4×40	2.30	EKMR201VSN102MQ40S		330	22×40	1.37	EKMR351VSN331MP40S
	1,000	30×30	1.95	EKMR201VSN102MR30S		330	22×45	1.40	EKMR351VSN331MQ45S
	1,200	25.4×45	2.58	EKMR201VSN122MQ45S		330	25.4×35	1.36	EKMR351VSN331MQ35S
	1,200	30×35	2.23	EKMR201VSN122MR35S		330	30×25	1.28	EKMR351VSN331MR25S
	1,200	35×25	1.94	EKMR201VSN122MA25S		390	22×50	1.56	EKMR351VSN391MP50S
	1,500	25.4×50	2.94	EKMR201VSN152MQ50S		390	25.4×40	1.52	EKMR351VSN391MQ40S
	1,500	30×40	2.58	EKMR201VSN152MR40S		390	30×30	1.43	EKMR351VSN391MR30S
	1,500	35×30	2.25	EKMR201VSN152MA30S		390	35×25	1.38	EKMR351VSN391MA25S
	1,800	30×45	2.92	EKMR201VSN182MR45S		470	25.4×45	1.71	EKMR351VSN471MQ45S

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	Rated ripple current (Arms/105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	Rated ripple current (Arms/105°C,120Hz)	Part No.
350	560	25.4×50	1.90	EKMR351VSN561MQ50S	420	220	25.4×35	1.16	EKMR421VSN221MQ35S
	560	30×35	1.78	EKMR351VSN561MR35S		220	30×25	1.11	EKMR421VSN221MR25S
	560	30×40	1.84	EKMR351VSN561MR40S		270	22×50	1.36	EKMR421VSN271MP50S
	560	35×30	1.72	EKMR351VSN561MA30S		270	25.4×40	1.32	EKMR421VSN271MQ40S
	680	30×45	2.10	EKMR351VSN681MR45S		270	30×30	1.26	EKMR421VSN271MR30S
	680	35×35	1.94	EKMR351VSN681MA35S		270	35×25	1.26	EKMR421VSN271MA25S
	820	30×50	2.36	EKMR351VSN821MR50S		330	25.4×45	1.49	EKMR421VSN331MQ45S
	820	35×40	2.23	EKMR351VSN821MA40S		330	30×35	1.45	EKMR421VSN331MR35S
	1,000	35×45	2.54	EKMR351VSN102MA45S		390	25.4×50	1.66	EKMR421VSN391MQ50S
400	1,200	35×50	2.86	EKMR351VSN122MA50S		390	30×40	1.63	EKMR421VSN391MR40S
	120	22×25	0.75	EKMR401VSN121MP25S	450	390	35×30	1.58	EKMR421VSN391MA30S
	180	22×30	0.96	EKMR401VSN181MP30S		470	30×45	1.85	EKMR421VSN471MR45S
	180	25.4×25	0.94	EKMR401VSN181MQ25S		470	35×35	1.77	EKMR421VSN471MA35S
	220	22×35	1.09	EKMR401VSN221MP35S		560	30×50	2.07	EKMR421VSN561MR50S
	220	25.4×30	1.07	EKMR401VSN221MQ30S		560	35×40	2.02	EKMR421VSN561MA40S
	270	22×40	1.24	EKMR401VSN271MP40S		680	35×45	2.29	EKMR421VSN681MA45S
	270	22×45	1.26	EKMR401VSN271MP45S		820	35×50	2.59	EKMR421VSN821MA50S
	270	25.4×35	1.23	EKMR401VSN271MQ35S		100	22×25	0.71	EKMR451VSN101MP25S
	270	30×25	1.16	EKMR401VSN271MR25S		120	22×30	0.82	EKMR451VSN121MP30S
	330	22×50	1.44	EKMR401VSN331MP50S		150	22×35	0.94	EKMR451VSN151MP35S
	330	25.4×40	1.40	EKMR401VSN331MQ40S		150	25.4×25	0.89	EKMR451VSN151MQ25S
	330	30×30	1.31	EKMR401VSN331MR30S		180	22×40	1.05	EKMR451VSN181MP40S
420	330	35×25	1.27	EKMR401VSN331MA25S		180	25.4×30	1.00	EKMR451VSN181MQ30S
	390	25.4×45	1.55	EKMR401VSN391MQ45S		220	22×45	1.19	EKMR451VSN221MP45S
	390	30×35	1.49	EKMR401VSN391MR35S		220	25.4×35	1.16	EKMR451VSN221MQ35S
	470	25.4×50	1.74	EKMR401VSN471MQ50S		220	30×25	1.11	EKMR451VSN221MR25S
	470	30×40	1.69	EKMR401VSN471MR40S		270	22×50	1.36	EKMR451VSN271MP50S
	470	35×30	1.58	EKMR401VSN471MA30S		270	25.4×40	1.32	EKMR451VSN271MQ40S
	560	30×45	1.91	EKMR401VSN561MR45S		270	25.4×45	1.35	EKMR451VSN271MQ45S
	560	35×35	1.76	EKMR401VSN561MA35S		270	30×30	1.26	EKMR451VSN271MR30S
	680	30×50	2.15	EKMR401VSN681MR50S		270	35×25	1.26	EKMR451VSN271MA25S
	680	35×40	2.03	EKMR401VSN681MA40S		330	25.4×50	1.52	EKMR451VSN331MQ50S
	820	35×45	2.30	EKMR401VSN821MA45S		330	30×35	1.45	EKMR451VSN331MR35S
	820	35×50	2.37	EKMR401VSN821MA50S		330	35×30	1.45	EKMR451VSN331MA30S
420	120	22×25	0.78	EKMR421VSN121MP25S		390	30×40	1.63	EKMR451VSN391MR40S
	150	22×30	0.91	EKMR421VSN151MP30S		470	30×45	1.85	EKMR451VSN471MR45S
	150	25.4×25	0.89	EKMR421VSN151MQ25S		470	30×50	1.90	EKMR451VSN471MR50S
	180	22×35	1.03	EKMR421VSN181MP35S		470	35×35	1.77	EKMR451VSN471MA35S
	180	25.4×30	1.00	EKMR421VSN181MQ30S		560	35×40	2.02	EKMR451VSN561MA40S
	220	22×40	1.16	EKMR421VSN221MP40S		560	35×45	2.08	EKMR451VSN561MA45S
	220	22×45	1.19	EKMR421VSN221MP45S		680	35×50	2.36	EKMR451VSN681MA50S

◆RATED RIPPLE CURRENT MULTIPLIERS

●Frequency Multipliers

Frequency(Hz)	50	120	300	1k	10k	50k
160 to 250V _{dc}	0.81	1.00	1.17	1.32	1.45	1.50
315 to 450V _{dc}	0.77	1.00	1.16	1.30	1.41	1.43

The ripple current gives aluminum electrolytic capacitors higher internal heat, the increased temperature accelerate the deterioration of the capacitors.

The lifetime is approximately halved with every 5°C rise.

SMQ Series

- Downsized from current downsized snap-ins SMH series
- Endurance with ripple current : 2,000 hours at 85°C
- Non solvent-proof type
- RoHS Compliant

SMQ

↓
Downsized
SMH




SPECIFICATIONS


Items	Characteristics				
Category	Temperature Range				
Temperature Range	−25 to +85°C				
Rated Voltage Range	160 to 450V _{dc}				
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)				
Leakage Current	I≤3√CV Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 5 minutes)				
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	160 to 250V	315 to 400V	420 & 450V	(at 20°C, 120Hz)
	tanδ (Max.)	0.15	0.15	0.20	
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	160 to 250V	315 to 400V	420 & 450V	(at 120Hz)
	Z(−25°C)/Z(+20°C)	4	8	8	
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 85°C.				
	Capacitance change	≤±20% of the initial value			
	D.F. (tanδ)	≤200% of the initial specified value			
	Leakage current	≤The initial specified value			
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 85°C without voltage applied.				
	Capacitance change	≤±15% of the initial value			
	D.F. (tanδ)	≤150% of the initial specified value			
	Leakage current	≤The initial specified value			

DIMENSIONS [mm]

- Terminal Code : VS (φ22 to φ35) : Standard

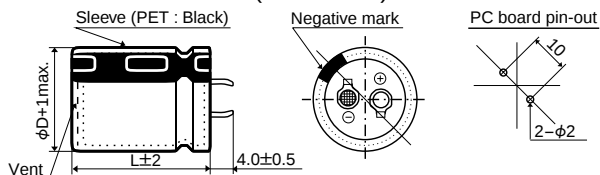


- Terminal Code : LI (φ35)

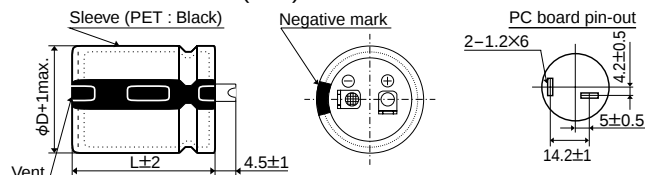

No plastic disk is the standard design.

PART NUMBERING SYSTEM

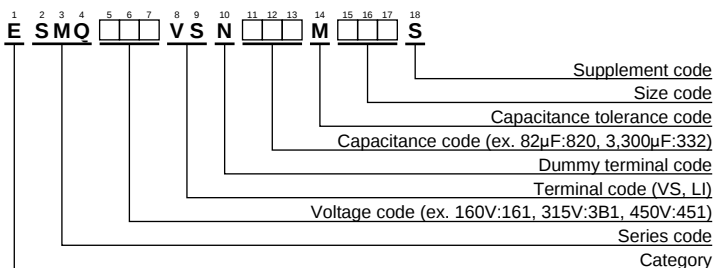

Please refer to "A guide to global code (snap-in type)"

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/ 85°C,120Hz)	Part No.
160	560	22×25	0.15	2.25	ESMQ161VSN561MP25S
	680	22×30	0.15	2.50	ESMQ161VSN681MP30S
	820	22×35	0.15	2.75	ESMQ161VSN821MP35S
	1,000	22×40	0.15	3.00	ESMQ161VSN102MP40S
	1,000	25.4×30	0.15	3.00	ESMQ161VSN102MQ30S
	1,200	22×45	0.15	3.25	ESMQ161VSN122MP45S
	1,200	25.4×35	0.15	3.25	ESMQ161VSN122MQ35S
	1,200	30×25	0.15	3.25	ESMQ161VSN122MR25S
	1,500	22×50	0.15	3.73	ESMQ161VSN152MP50S
	1,500	25.4×40	0.15	3.73	ESMQ161VSN152MQ40S
	1,500	30×30	0.15	3.73	ESMQ161VSN152MR30S
	1,500	35×25	0.15	3.73	ESMQ161VSN152MA25S
	1,800	25.4×45	0.15	4.20	ESMQ161VSN182MP45S
	1,800	30×35	0.15	4.20	ESMQ161VSN182MR35S
	1,800	35×30	0.15	4.20	ESMQ161VSN182MA30S
	2,200	30×40	0.15	4.78	ESMQ161VSN222MR40S
	2,200	35×35	0.15	4.78	ESMQ161VSN222MA35S
	2,700	35×40	0.15	5.45	ESMQ161VSN272MA40S
	3,300	35×45	0.15	5.75	ESMQ161VSN332MA45S
	3,900	35×50	0.15	6.00	ESMQ161VSN392MA50S
180	470	22×25	0.15	2.08	ESMQ181VSN471MP25S
	560	22×30	0.15	2.25	ESMQ181VSN561MP30S
	680	22×30	0.15	2.50	ESMQ181VSN681MP30S
	680	25.4×25	0.15	2.50	ESMQ181VSN681MQ25S
	820	22×35	0.15	2.75	ESMQ181VSN821MP35S
	820	25.4×30	0.15	2.75	ESMQ181VSN821MQ30S
	1,000	22×45	0.15	3.00	ESMQ181VSN102MP45S
	1,000	25.4×35	0.15	3.00	ESMQ181VSN102MQ35S
	1,000	30×25	0.15	3.00	ESMQ181VSN102MR25S
	1,200	22×50	0.15	3.31	ESMQ181VSN122MP50S
	1,200	25.4×40	0.15	3.31	ESMQ181VSN122MQ40S
	1,200	30×30	0.15	3.31	ESMQ181VSN122MR30S
	1,200	35×25	0.15	3.31	ESMQ181VSN122MA25S
	1,500	25.4×45	0.15	3.83	ESMQ181VSN152MP45S
	1,500	30×35	0.15	3.83	ESMQ181VSN152MR35S
	1,500	35×30	0.15	3.83	ESMQ181VSN152MA30S
	1,800	25.4×50	0.15	4.32	ESMQ181VSN182MQ50S
	1,800	30×40	0.15	4.32	ESMQ181VSN182MR40S
	1,800	35×30	0.15	4.32	ESMQ181VSN182MA30S
200	2,200	30×45	0.15	4.92	ESMQ181VSN222MR45S
	2,200	35×40	0.15	4.92	ESMQ181VSN222MA40S
	2,700	35×45	0.15	5.52	ESMQ181VSN272MA45S
	3,300	35×50	0.15	5.75	ESMQ181VSN332MA50S
	390	22×25	0.15	1.68	ESMQ201VSN391MP25S
	470	22×30	0.15	1.85	ESMQ201VSN471MP30S
	560	22×30	0.15	2.43	ESMQ201VSN561MP30S
	560	25.4×25	0.15	2.43	ESMQ201VSN561MQ25S
	680	22×35	0.15	2.68	ESMQ201VSN681MP35S
	680	25.4×30	0.15	2.68	ESMQ201VSN681MQ30S
	820	22×40	0.15	2.93	ESMQ201VSN821MP40S
	820	25.4×30	0.15	2.93	ESMQ201VSN821MQ30S
	820	30×25	0.15	2.93	ESMQ201VSN821MR25S
	1,000	22×45	0.15	3.25	ESMQ201VSN102MP45S
	1,000	25.4×35	0.15	3.25	ESMQ201VSN102MQ35S
	1,000	30×30	0.15	3.25	ESMQ201VSN102MR30S
	1,000	35×25	0.15	3.25	ESMQ201VSN102MA25S
	1,200	25.4×40	0.15	3.50	ESMQ201VSN122MQ40S
	1,200	30×30	0.15	3.50	ESMQ201VSN122MR30S
	1,200	35×30	0.15	3.50	ESMQ201VSN122MA30S
250	1,500	25.4×50	0.15	3.87	ESMQ201VSN152MQ50S
	1,500	30×35	0.15	3.87	ESMQ201VSN152MR35S
	1,500	35×30	0.15	3.87	ESMQ201VSN152MA30S
	1,800	30×45	0.15	4.32	ESMQ201VSN182MR45S
	1,800	35×35	0.15	4.32	ESMQ201VSN182MA35S
	2,200	30×50	0.15	4.92	ESMQ201VSN222MR50S
	2,200	35×40	0.15	4.92	ESMQ201VSN222MA40S
	2,700	35×50	0.15	5.45	ESMQ201VSN272MA50S
	270	22×25	0.15	1.31	ESMQ251VSN271MP25S
	330	22×30	0.15	1.75	ESMQ251VSN331MP30S
	390	22×30	0.15	1.91	ESMQ251VSN391MP30S
	390	25.4×25	0.15	1.91	ESMQ251VSN391MQ25S
	470	22×35	0.15	2.11	ESMQ251VSN471MP35S
	470	25.4×30	0.15	2.11	ESMQ251VSN471MQ30S
	560	22×40	0.15	2.25	ESMQ251VSN561MP40S
	560	25.4×30	0.15	2.25	ESMQ251VSN561MQ30S
	560	30×25	0.15	2.25	ESMQ251VSN561MR25S
	680	22×45	0.15	2.50	ESMQ251VSN681MP45S
	680	25.4×35	0.15	2.50	ESMQ251VSN681MQ35S
	680	30×30	0.15	2.50	ESMQ251VSN681MR30S
315	820	22×50	0.15	2.77	ESMQ251VSN821MP50S
	820	25.4×40	0.15	2.77	ESMQ251VSN821MQ40S
	820	30×30	0.15	2.77	ESMQ251VSN821MR30S
	820	35×25	0.15	2.77	ESMQ251VSN821MA25S
	1,000	25.4×45	0.15	3.32	ESMQ251VSN102MQ45S
	1,000	30×35	0.15	3.32	ESMQ251VSN102MR35S
	1,000	35×30	0.15	3.32	ESMQ251VSN102MA30S
	1,200	30×40	0.15	3.53	ESMQ251VSN122MR40S
	1,200	35×35	0.15	3.53	ESMQ251VSN122MA35S
	1,500	30×50	0.15	4.04	ESMQ251VSN152MR50S
	1,500	35×40	0.15	4.04	ESMQ251VSN152MA40S
	1,800	35×45	0.15	4.55	ESMQ251VSN182MA45S
	180	22×25	0.15	1.21	ESMQ3B1VSN181MP25S
	220	22×30	0.15	1.41	ESMQ3B1VSN221MP30S
	270	22×30	0.15	1.60	ESMQ3B1VSN271MP30S
	330	22×40	0.15	1.82	ESMQ3B1VSN331MP40S
	330	25.4×30	0.15	1.82	ESMQ3B1VSN331MQ30S
	330	30×25	0.15	1.82	ESMQ3B1VSN331MR25S
	390	22×45	0.15	2.01	ESMQ3B1VSN391MP45S
	390	25.4×35	0.15	2.01	ESMQ3B1VSN391MQ35S
	390	30×30	0.15	2.01	ESMQ3B1VSN391MR30S
350	470	22×50	0.15	2.27	ESMQ3B1VSN471MP50S
	470	25.4×40	0.15	2.27	ESMQ3B1VSN471MQ40S
	470	30×30	0.15	2.27	ESMQ3B1VSN471MR30S
	470	35×25	0.15	2.27	ESMQ3B1VSN471MA25S
	560	25.4×45	0.15	2.56	ESMQ3B1VSN561MQ45S
	560	30×35	0.15	2.56	ESMQ3B1VSN561MR35S
	560	35×30	0.15	2.56	ESMQ3B1VSN561MA30S
	680	30×40	0.15	2.87	ESMQ3B1VSN681MR40S
	680	35×35	0.15	2.87	ESMQ3B1VSN681MA35S
	820	30×45	0.15	3.25	ESMQ3B1VSN821MR45S
	820	35×40	0.15	3.25	ESMQ3B1VSN821MA40S
	1,000	30×50	0.15	3.63	ESMQ3B1VSN102MR50S
	1,000	35×45	0.15	3.63	ESMQ3B1VSN102MA45S
	150	22×25	0.15	1.12	ESMQ351VSN151MP25S
	180	22×30	0.15	1.22	ESMQ351VSN181MP30S
	220	22×35	0.15	1.44	ESMQ351VSN221MP35S
	270	22×40	0.15	1.66	ESMQ351VSN271MP40S
	270	25.4×30	0.15	1.66	ESMQ351VSN271MQ30S
	330	22×45	0.15	1.88	ESMQ351VSN331MP45S
	330	25.4×35	0.15	1.88	ESMQ351VSN331MQ35S
	390	22×50	0.15	2.06	ESMQ351VSN391MP50S
	390	25.4×40	0.15	2.06	ESMQ351VSN391MQ40S
350	390	30×30	0.15	2.06	ESMQ351VSN391MR30S
	390	35×25	0.15	2.06	ESMQ351VSN391MA25S
	470	25.4×45	0.15	2.40	ESMQ351VSN471MQ45S
	470	30×35	0.15	2.40	ESMQ351VSN471MR35S
	470	35×30	0.15	2.40	ESMQ351VSN471MA30S
	560	25.4×50	0.15	2.60	ESMQ351VSN561MQ50S
	560	30×40	0.15	2.60	ESMQ351VSN561MR40S
	560	35×30	0.15	2.60	ESMQ351VSN561MA30S
	680	30×45	0.15	2.96	ESMQ351VSN681MR45S
	680	35×35	0.15	2.96	ESMQ351VSN681MA35S
	820	30×50	0.15	3.25	ESMQ351VSN821MR50S
	820	35×45	0.15	3.25	ESMQ351VSN821MA45S

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/ 85°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/ 85°C,120Hz)	Part No.
350	1,000	35×50	0.15	3.54	ESMQ351VSN102MA50S	420	270	30×30	0.20	1.94	ESMQ421VSN271MR30S
400	120	22×25	0.15	1.02	ESMQ401VSN121MP25S		330	25.4×45	0.20	2.17	ESMQ421VSN331MQ45S
	150	22×30	0.15	1.16	ESMQ401VSN151MP30S		330	30×35	0.20	2.17	ESMQ421VSN331MR35S
	180	22×35	0.15	1.44	ESMQ401VSN181MP35S		330	35×30	0.20	2.17	ESMQ421VSN331MA30S
	220	22×40	0.15	1.49	ESMQ401VSN221MP40S		390	25.4×50	0.20	2.27	ESMQ421VSN391MQ50S
	220	25.4×30	0.15	1.49	ESMQ401VSN221MQ30S		390	30×35	0.20	2.27	ESMQ421VSN391MR35S
	270	22×45	0.15	1.67	ESMQ401VSN271MP45S		390	35×30	0.20	2.27	ESMQ421VSN391MA30S
	270	25.4×35	0.15	1.67	ESMQ401VSN271MQ35S		470	30×40	0.20	2.61	ESMQ421VSN471MR40S
	270	30×25	0.15	1.67	ESMQ401VSN271MR25S		470	35×35	0.20	2.61	ESMQ421VSN471MA35S
	330	22×50	0.15	1.90	ESMQ401VSN331MP50S		560	30×50	0.20	2.82	ESMQ421VSN561MR50S
	330	25.4×40	0.15	1.90	ESMQ401VSN331MQ40S		560	35×40	0.20	2.82	ESMQ421VSN561MA40S
	330	30×30	0.15	1.90	ESMQ401VSN331MR30S		680	35×45	0.20	3.11	ESMQ421VSN681MA45S
	330	35×25	0.15	1.90	ESMQ401VSN331MA25S	450	82	22×25	0.20	0.83	ESMQ451VSN820MP25S
	390	25.4×45	0.15	2.13	ESMQ401VSN391MQ45S		100	22×25	0.20	0.93	ESMQ451VSN101MP25S
	390	30×35	0.15	2.13	ESMQ401VSN391MR35S		120	22×30	0.20	1.04	ESMQ451VSN121MP30S
	390	35×30	0.15	2.13	ESMQ401VSN391MA30S		150	22×35	0.20	1.19	ESMQ451VSN151MP35S
	470	25.4×50	0.15	2.39	ESMQ401VSN471MQ50S		150	25.4×25	0.20	1.19	ESMQ451VSN151MQ25S
	470	30×40	0.15	2.39	ESMQ401VSN471MR40S		180	22×40	0.20	1.35	ESMQ451VSN181MP40S
	470	35×30	0.15	2.39	ESMQ401VSN471MA30S		180	25.4×30	0.20	1.35	ESMQ451VSN181MQ30S
	560	30×45	0.15	2.69	ESMQ401VSN561MR45S		220	22×45	0.20	1.55	ESMQ451VSN221MP45S
	560	35×35	0.15	2.69	ESMQ401VSN561MA35S		220	25.4×40	0.20	1.55	ESMQ451VSN221MQ40S
	680	30×50	0.15	2.96	ESMQ401VSN681MR50S		220	30×30	0.20	1.55	ESMQ451VSN221MR30S
	680	35×40	0.15	2.96	ESMQ401VSN681MA40S		220	35×25	0.20	1.55	ESMQ451VSN221MA25S
	820	35×45	0.15	3.25	ESMQ401VSN821MA45S		270	22×50	0.20	1.78	ESMQ451VSN271MP50S
420	100	22×25	0.20	0.97	ESMQ421VSN101MP25S		270	25.4×40	0.20	1.78	ESMQ451VSN271MQ40S
	120	22×25	0.20	1.08	ESMQ421VSN121MP25S		270	30×30	0.20	1.78	ESMQ451VSN271MR30S
	150	22×30	0.20	1.30	ESMQ421VSN151MP30S		330	25.4×50	0.20	2.01	ESMQ451VSN331MQ50S
	150	25.4×25	0.20	1.30	ESMQ421VSN151MQ25S		330	30×40	0.20	2.01	ESMQ451VSN331MR40S
	180	22×35	0.20	1.48	ESMQ421VSN181MP35S		330	35×30	0.20	2.01	ESMQ451VSN331MA30S
	180	25.4×30	0.20	1.48	ESMQ421VSN181MQ30S		390	30×40	0.20	2.24	ESMQ451VSN391MR40S
	220	22×40	0.20	1.65	ESMQ421VSN221MP40S		390	35×35	0.20	2.24	ESMQ451VSN391MA35S
	220	25.4×35	0.20	1.65	ESMQ421VSN221MQ35S		470	30×45	0.20	2.53	ESMQ451VSN471MR45S
	220	30×25	0.20	1.65	ESMQ421VSN221MR25S		470	35×40	0.20	2.53	ESMQ451VSN471MA40S
	270	22×50	0.20	1.94	ESMQ421VSN271MP50S		560	30×50	0.20	2.82	ESMQ451VSN561MR50S
	270	25.4×35	0.20	1.94	ESMQ421VSN271MQ35S		560	35×45	0.20	2.82	ESMQ451VSN561MA45S

◆RATED RIPPLE CURRENT MULTIPLIERS

●Frequency Multipliers


Frequency(Hz)	50	120	300	1k	10k	50k
160 to 250V _{dc}	0.81	1.00	1.17	1.32	1.45	1.50
315 to 450V _{dc}	0.77	1.00	1.16	1.30	1.41	1.43

The endurance of capacitors is shortened with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

Upgrade!

KMQ Series

- Downsized from current downsized snap-ins KMH series
- Endurance with ripple current : 2,000 hours at 105°C
- Non solvent-proof type
- RoHS Compliant




SPECIFICATIONS

Items	Characteristics								
Category	–40 to +105℃ (35&50V _{dc}), –25 to +105℃ (160 to 450V _{dc})								
Temperature Range									
Rated Voltage Range	35&50V _{dc} , 160 to 450V _{dc}								
Capacitance Tolerance	±20% (M) (at 20℃, 120Hz)								
Leakage Current	I≤3√CV Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20℃ after 5 minutes)								
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	35V		50V		160 to 250V	315 to 400V	420 & 450V	(at 20℃, 120Hz)
	Nominal capacitance (μF)	10,000>C	C≥10,000	10,000>C	C≥10,000	—	—	—	
	tanδ (Max.)	0.30	0.35	0.25	0.30	0.15	0.15	0.20	
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	35&50V	160 to 250V	315 to 400V	420 & 450V	(at 120Hz)			
	Z(–40℃)/Z(+20℃)	4	—	—	—				
	Z(–25℃)/Z(+20℃)	10	4	8	8				
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20℃ after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 105℃.								
	Capacitance change	≤±20% of the initial value							
	D.F. (tanδ)	≤200% of the initial specified value							
	Leakage current	≤The initial specified value							
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for 1,000 hours at 105℃ without voltage applied.								
	Capacitance change	≤±15% of the initial value							
	D.F. (tanδ)	≤150% of the initial specified value							
	Leakage current	≤The initial specified value							


DIMENSIONS [mm]

● Terminal Code : VS (φ22 to φ35) : Standard

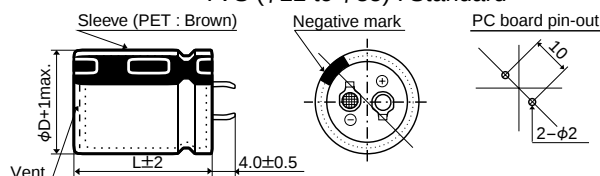


No plastic disk is the standard design.

● Terminal Code : LI (φ35)

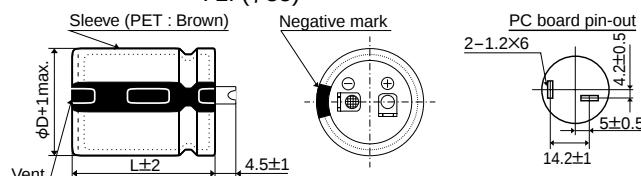

PART NUMBERING SYSTEM

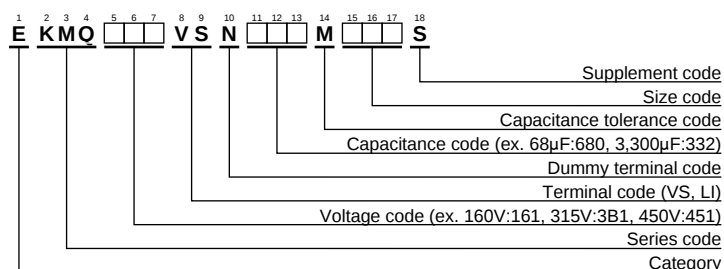

Please refer to "A guide to global code (snap-in type)"

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/ 105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/ 105°C,120Hz)	Part No.
35	4,700	22×25	0.30	1.87	EKMQ350VSN472MP25S	160	1,800	30×40	0.15	2.70	EKMQ161VSN182MR40S
	5,600	22×25	0.30	2.04	EKMQ350VSN562MP25S		1,800	35×30	0.15	2.70	EKMQ161VSN182MA30S
	5,600	25.4×25	0.30	2.00	EKMQ350VSN562MQ25S		2,200	30×45	0.15	2.90	EKMQ161VSN222MR45S
	6,800	22×30	0.30	2.36	EKMQ350VSN682MP30S		2,200	35×35	0.15	2.90	EKMQ161VSN222MA35S
	6,800	25.4×25	0.30	2.21	EKMQ350VSN682MQ25S		2,700	30×50	0.15	3.10	EKMQ161VSN272MR50S
	8,200	22×35	0.30	2.65	EKMQ350VSN822MP35S		2,700	35×40	0.15	3.10	EKMQ161VSN272MA40S
	8,200	25.4×30	0.30	2.49	EKMQ350VSN822MQ30S		3,300	35×50	0.15	3.30	EKMQ161VSN332MA50S
	8,200	30×25	0.30	2.62	EKMQ350VSN822MR25S		390	22×25	0.15	1.30	EKMQ181VSN391MP25S
	10,000	22×40	0.35	3.00	EKMQ350VSN103MP40S		470	22×30	0.15	1.40	EKMQ181VSN471MP30S
	10,000	25.4×35	0.35	2.88	EKMQ350VSN103MQ35S	180	560	22×30	0.15	1.50	EKMQ181VSN561MP30S
	10,000	30×25	0.35	2.90	EKMQ350VSN103MR25S		560	25.4×25	0.15	1.50	EKMQ181VSN561MQ25S
	12,000	22×50	0.35	3.47	EKMQ350VSN123MP50S		680	22×35	0.15	1.70	EKMQ181VSN681MP35S
	12,000	25.4×35	0.35	3.15	EKMQ350VSN123MQ35S		680	25.4×30	0.15	1.70	EKMQ181VSN681MQ30S
	12,000	30×30	0.35	3.25	EKMQ350VSN123MR30S		820	22×40	0.15	2.00	EKMQ181VSN821MP40S
	12,000	35×25	0.35	3.20	EKMQ350VSN123MA25S		820	25.4×30	0.15	2.00	EKMQ181VSN821MQ30S
	15,000	25.4×40	0.35	3.61	EKMQ350VSN153MQ40S		820	30×25	0.15	2.00	EKMQ181VSN821MR25S
	15,000	30×35	0.35	3.78	EKMQ350VSN153MR35S		1,000	22×45	0.15	2.20	EKMQ181VSN102MP45S
	15,000	35×25	0.35	3.60	EKMQ350VSN153MA25S		1,000	25.4×40	0.15	2.20	EKMQ181VSN102MQ40S
	18,000	25.4×50	0.35	4.14	EKMQ350VSN183MQ50S		1,000	30×30	0.15	2.20	EKMQ181VSN102MR30S
	18,000	30×40	0.35	4.30	EKMQ350VSN183MR40S		1,000	35×25	0.15	2.20	EKMQ181VSN102MA25S
	18,000	35×30	0.35	4.10	EKMQ350VSN183MA30S		1,200	25.4×45	0.15	2.30	EKMQ181VSN122MQ45S
	22,000	30×50	0.35	5.00	EKMQ350VSN223MR50S		1,200	30×35	0.15	2.30	EKMQ181VSN122MR35S
	22,000	35×35	0.35	4.64	EKMQ350VSN223MA35S		1,200	35×30	0.15	2.30	EKMQ181VSN122MA30S
	27,000	35×40	0.35	5.37	EKMQ350VSN273MA40S		1,500	25.4×50	0.15	2.50	EKMQ181VSN152MQ50S
	33,000	35×50	0.35	6.00	EKMQ350VSN333MA50S		1,500	30×40	0.15	2.50	EKMQ181VSN152MR40S
50	2,700	22×25	0.25	1.65	EKMQ500VSN272MP25S		1,500	35×30	0.15	2.50	EKMQ181VSN152MA30S
	3,300	22×30	0.25	1.92	EKMQ500VSN332MP30S	200	1,800	30×45	0.15	2.70	EKMQ181VSN182MR45S
	3,300	25.4×25	0.25	1.76	EKMQ500VSN332MQ25S		1,800	35×35	0.15	2.70	EKMQ181VSN182MA35S
	3,900	22×30	0.25	2.08	EKMQ500VSN392MP30S		2,200	30×50	0.15	2.90	EKMQ181VSN222MR50S
	3,900	25.4×25	0.25	2.04	EKMQ500VSN392MQ25S		2,200	35×40	0.15	2.90	EKMQ181VSN222MA40S
	4,700	22×35	0.25	2.43	EKMQ500VSN472MP35S		2,700	35×50	0.15	3.10	EKMQ181VSN272MA50S
	4,700	25.4×30	0.25	2.50	EKMQ500VSN472MQ30S	250	390	22×25	0.15	1.31	EKMQ201VSN391MP25S
	4,700	30×25	0.25	2.29	EKMQ500VSN472MR25S		470	22×30	0.15	1.45	EKMQ201VSN471MP30S
	5,600	22×40	0.25	2.63	EKMQ500VSN562MP40S		560	22×30	0.15	1.67	EKMQ201VSN561MP30S
	5,600	25.4×35	0.25	2.61	EKMQ500VSN562MQ35S		560	25.4×25	0.15	1.67	EKMQ201VSN561MQ25S
	5,600	30×25	0.25	2.80	EKMQ500VSN562MR25S		680	22×40	0.15	1.75	EKMQ201VSN681MP40S
	6,800	22×50	0.25	3.05	EKMQ500VSN682MP50S		680	25.4×30	0.15	1.75	EKMQ201VSN681MQ30S
	6,800	25.4×40	0.25	2.94	EKMQ500VSN682MQ40S		820	22×45	0.15	2.04	EKMQ201VSN821MP45S
	6,800	30×30	0.25	3.30	EKMQ500VSN682MR30S		820	25.4×35	0.15	2.04	EKMQ201VSN821MQ35S
	6,800	35×25	0.25	2.77	EKMQ500VSN682MA25S		820	30×25	0.15	2.04	EKMQ201VSN821MR25S
	8,200	25.4×45	0.25	3.60	EKMQ500VSN822MQ45S		1,000	22×50	0.15	2.30	EKMQ201VSN102MP50S
	8,200	30×35	0.25	3.60	EKMQ500VSN822MR35S		1,000	25.4×45	0.15	2.30	EKMQ201VSN102MQ45S
	8,200	35×30	0.25	3.60	EKMQ500VSN822MA30S		1,000	30×30	0.15	2.30	EKMQ201VSN102MR30S
	10,000	25.4×50	0.30	4.00	EKMQ500VSN103MQ50S		1,000	35×25	0.15	2.30	EKMQ201VSN102MA25S
	10,000	30×40	0.30	4.00	EKMQ500VSN103MR40S		1,200	25.4×50	0.15	2.65	EKMQ201VSN122MQ50S
	10,000	35×30	0.30	4.00	EKMQ500VSN103MA30S		1,200	30×35	0.15	2.65	EKMQ201VSN122MR35S
	12,000	30×50	0.30	4.29	EKMQ500VSN123MR50S		1,200	35×30	0.15	2.65	EKMQ201VSN122MA30S
	12,000	35×35	0.30	4.37	EKMQ500VSN123MA35S		1,500	30×40	0.15	2.80	EKMQ201VSN152MR40S
	15,000	35×40	0.30	4.50	EKMQ500VSN153MA40S		1,500	35×30	0.15	2.80	EKMQ201VSN152MA30S
	18,000	35×50	0.30	5.30	EKMQ500VSN183MA50S		1,800	30×45	0.15	3.08	EKMQ201VSN182MR45S
160	470	22×25	0.15	1.40	EKMQ161VSN471MP25S		1,800	35×40	0.15	3.08	EKMQ201VSN182MA40S
	560	22×30	0.15	1.50	EKMQ161VSN561MP30S	250	2,200	35×45	0.15	3.48	EKMQ201VSN222MA45S
	680	22×30	0.15	1.70	EKMQ161VSN681MP30S		220	22×25	0.15	1.00	EKMQ251VSN221MP25S
	680	25.4×25	0.15	1.70	EKMQ161VSN681MQ25S		270	22×25	0.15	1.10	EKMQ251VSN271MP25S
	820	22×35	0.15	2.00	EKMQ161VSN821MP35S		330	22×30	0.15	1.20	EKMQ251VSN331MP30S
	820	25.4×30	0.15	2.00	EKMQ161VSN821MQ30S		330	25.4×25	0.15	1.20	EKMQ251VSN331MQ25S
	820	30×25	0.15	2.00	EKMQ161VSN821MR25S		390	22×35	0.15	1.30	EKMQ251VSN391MP35S
	1,000	22×40	0.15	2.20	EKMQ161VSN102MP40S		390	25.4×25	0.15	1.30	EKMQ251VSN391MQ25S
	1,000	25.4×35	0.15	2.20	EKMQ161VSN102MQ35S		470	22×40	0.15	1.40	EKMQ251VSN471MP40S
	1,000	30×25	0.15	2.20	EKMQ161VSN102MR25S		470	25.4×30	0.15	1.40	EKMQ251VSN471MQ30S
	1,200	25.4×40	0.15	2.30	EKMQ161VSN122MQ40S		470	30×25	0.15	1.40	EKMQ251VSN471MR25S
	1,200	30×30	0.15	2.30	EKMQ161VSN122MR30S	250	560	22×45	0.15	1.50	EKMQ251VSN561MP45S
	1,200	35×25	0.15	2.30	EKMQ161VSN122MA25S		560	25.4×35	0.15	1.50	EKMQ251VSN561MQ35S
	1,500	25.4×45	0.15	2.50	EKMQ161VSN152MQ45S		560	30×25	0.15	1.50	EKMQ251VSN561MR25S
	1,500	30×35	0.15	2.50	EKMQ161VSN152MR35S		680	22×50	0.15	1.70	EKMQ251VSN681MP50S
	1,500	35×30	0.15	2.50	EKMQ161VSN152MA30S		680	25.4×40	0.15	1.70	EKMQ251VSN681MQ40S
	1,800	25.4×50	0.15	2.70	EKMQ161VSN182MQ50S		680	30×30	0.15	1.70	EKMQ251VSN681MR30S

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/ 105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/ 105°C,120Hz)	Part No.
250	680	35×25	0.15	1.70	EKMQ251VSN681MA25S	400	270	25.4×40	0.15	1.22	EKMQ401VSN271MQ40S
	820	25.4×45	0.15	2.00	EKMQ251VSN821MQ45S		270	30×30	0.15	1.22	EKMQ401VSN271MR30S
	820	30×35	0.15	2.00	EKMQ251VSN821MR35S		270	35×25	0.15	1.22	EKMQ401VSN271MA25S
	820	35×30	0.15	2.00	EKMQ251VSN821MA30S		330	25.4×45	0.15	1.44	EKMQ401VSN331MQ45S
	1,000	30×40	0.15	2.20	EKMQ251VSN102MR40S		330	30×35	0.15	1.44	EKMQ401VSN331MR35S
	1,000	35×30	0.15	2.20	EKMQ251VSN102MA30S		330	35×30	0.15	1.44	EKMQ401VSN331MA30S
	1,200	30×45	0.15	2.30	EKMQ251VSN122MR45S		390	25.4×50	0.15	1.55	EKMQ401VSN391MQ50S
	1,200	35×35	0.15	2.30	EKMQ251VSN122MA35S		390	30×40	0.15	1.55	EKMQ401VSN391MR40S
	1,500	35×45	0.15	2.50	EKMQ251VSN152MA45S		390	35×30	0.15	1.55	EKMQ401VSN391MA30S
	1,800	35×50	0.15	2.70	EKMQ251VSN182MA50S		470	30×45	0.15	1.68	EKMQ401VSN471MR45S
315	150	22×25	0.15	0.82	EKMQ3B1VSN151MP25S	420	470	35×35	0.15	1.68	EKMQ401VSN471MR35S
	180	22×30	0.15	0.90	EKMQ3B1VSN181MP30S		560	30×50	0.15	1.90	EKMQ401VSN561MR50S
	220	22×30	0.15	1.00	EKMQ3B1VSN221MP30S		560	35×40	0.15	1.90	EKMQ401VSN561MA40S
	220	25.4×25	0.15	1.00	EKMQ3B1VSN221MQ25S		680	35×45	0.15	2.12	EKMQ401VSN681MA45S
	270	22×35	0.15	1.10	EKMQ3B1VSN271MP35S		82	22×25	0.20	0.64	EKMQ421VSN820MP25S
	270	25.4×30	0.15	1.10	EKMQ3B1VSN271MQ30S		100	22×25	0.20	0.66	EKMQ421VSN101MP25S
	330	22×45	0.15	1.20	EKMQ3B1VSN331MP45S		100	25.4×25	0.20	0.66	EKMQ421VSN101MQ25S
	330	25.4×35	0.15	1.20	EKMQ3B1VSN331MQ35S		120	22×30	0.20	0.81	EKMQ421VSN121MP30S
	330	30×25	0.15	1.20	EKMQ3B1VSN331MR25S		120	25.4×25	0.20	0.81	EKMQ421VSN121MQ25S
	390	22×45	0.15	1.30	EKMQ3B1VSN391MP45S		150	22×35	0.20	0.84	EKMQ421VSN151MP35S
	390	25.4×40	0.15	1.30	EKMQ3B1VSN391MQ40S		150	25.4×30	0.20	0.84	EKMQ421VSN151MQ30S
	390	30×30	0.15	1.30	EKMQ3B1VSN391MR30S		150	30×25	0.20	0.84	EKMQ421VSN151MR25S
	390	35×25	0.15	1.30	EKMQ3B1VSN391MA25S		180	22×40	0.20	0.91	EKMQ421VSN181MP40S
	470	25.4×45	0.15	1.40	EKMQ3B1VSN471MQ45S		180	25.4×30	0.20	0.91	EKMQ421VSN181MQ30S
	470	30×35	0.15	1.40	EKMQ3B1VSN471MR35S		180	30×25	0.20	0.91	EKMQ421VSN181MR25S
	470	35×25	0.15	1.40	EKMQ3B1VSN471MA25S		220	22×45	0.20	1.05	EKMQ421VSN221MP45S
	560	25.4×50	0.15	1.50	EKMQ3B1VSN561MQ50S		220	25.4×35	0.20	1.05	EKMQ421VSN221MQ35S
	560	30×40	0.15	1.50	EKMQ3B1VSN561MR40S		220	30×30	0.20	1.05	EKMQ421VSN221MR30S
	560	35×30	0.15	1.50	EKMQ3B1VSN561MA30S		220	35×25	0.20	1.05	EKMQ421VSN221MA25S
	680	30×45	0.15	1.70	EKMQ3B1VSN681MR45S		270	25.4×40	0.20	1.25	EKMQ421VSN271MQ40S
	680	35×35	0.15	1.70	EKMQ3B1VSN681MA35S		270	30×30	0.20	1.25	EKMQ421VSN271MR30S
350	820	30×50	0.15	2.00	EKMQ3B1VSN821MR50S	450	270	35×25	0.20	1.25	EKMQ421VSN271MA25S
	820	35×40	0.15	2.00	EKMQ3B1VSN821MA40S		330	25.4×50	0.20	1.42	EKMQ421VSN331MQ50S
	1,000	35×45	0.15	2.30	EKMQ3B1VSN102MA45S		330	30×35	0.20	1.42	EKMQ421VSN331MR35S
	120	22×25	0.15	0.75	EKMQ351VSN121MP25S		330	35×30	0.20	1.42	EKMQ421VSN331MA30S
	150	22×30	0.15	0.82	EKMQ351VSN151MP30S		390	30×40	0.20	1.61	EKMQ421VSN391MR40S
	180	22×30	0.15	0.90	EKMQ351VSN181MP30S		390	35×35	0.20	1.61	EKMQ421VSN391MA35S
	180	25.4×25	0.15	0.90	EKMQ351VSN181MQ25S		470	30×45	0.20	1.86	EKMQ421VSN471MR45S
	220	22×35	0.15	1.00	EKMQ351VSN221MP35S		470	35×40	0.20	1.86	EKMQ421VSN471MA40S
	220	25.4×30	0.15	1.00	EKMQ351VSN221MQ30S		560	35×45	0.20	2.10	EKMQ421VSN561MA45S
	270	22×40	0.15	1.10	EKMQ351VSN271MP40S		680	35×50	0.20	2.20	EKMQ421VSN681MA50S
	270	25.4×30	0.15	1.10	EKMQ351VSN271MQ30S		68	22×25	0.20	0.50	EKMQ451VSN680MP25S
	270	30×25	0.15	1.10	EKMQ351VSN271MR25S		82	22×30	0.20	0.56	EKMQ451VSN820MP30S
	330	22×45	0.15	1.20	EKMQ351VSN331MP45S		100	22×30	0.20	0.64	EKMQ451VSN101MP30S
	330	25.4×40	0.15	1.20	EKMQ351VSN331MQ40S		100	25.4×25	0.20	0.64	EKMQ451VSN101MQ25S
	330	30×30	0.15	1.20	EKMQ351VSN331MR30S		120	22×35	0.20	0.72	EKMQ451VSN121MP35S
	390	25.4×45	0.15	1.30	EKMQ351VSN391MQ45S		120	25.4×30	0.20	0.72	EKMQ451VSN121MQ30S
	390	30×35	0.15	1.30	EKMQ351VSN391MR35S		150	22×40	0.20	0.79	EKMQ451VSN151MP40S
	470	25.4×50	0.15	1.40	EKMQ351VSN471MQ50S		150	25.4×30	0.20	0.79	EKMQ451VSN151MQ30S
	470	30×35	0.15	1.40	EKMQ351VSN471MR35S		150	30×25	0.20	0.79	EKMQ451VSN151MR25S
	470	35×30	0.15	1.40	EKMQ351VSN471MA30S		180	22×45	0.20	0.87	EKMQ451VSN181MP45S
400	560	30×45	0.15	1.50	EKMQ351VSN561MR45S		180	25.4×40	0.20	0.87	EKMQ451VSN181MQ40S
	560	35×35	0.15	1.50	EKMQ351VSN561MA35S		180	30×30	0.20	0.87	EKMQ451VSN181MR30S
	680	30×50	0.15	1.70	EKMQ351VSN681MR50S		220	25.4×45	0.20	1.00	EKMQ451VSN221MQ45S
	680	35×40	0.15	1.70	EKMQ351VSN681MA40S		220	30×30	0.20	1.00	EKMQ451VSN221MR30S
	820	35×45	0.15	1.90	EKMQ351VSN821MA45S		220	35×25	0.20	1.00	EKMQ451VSN221MA25S
	100	22×25	0.15	0.70	EKMQ401VSN101MP25S		270	25.4×50	0.20	1.19	EKMQ451VSN271MQ50S
	120	22×30	0.15	0.75	EKMQ401VSN121MP30S		270	30×40	0.20	1.19	EKMQ451VSN271MR40S
	150	22×30	0.15	0.88	EKMQ401VSN151MP30S		270	35×30	0.20	1.19	EKMQ451VSN271MA30S
	150	25.4×25	0.15	0.88	EKMQ401VSN151MQ25S		330	30×45	0.20	1.38	EKMQ451VSN331MR45S
	180	22×35	0.15	0.95	EKMQ401VSN181MP35S		330	35×35	0.20	1.38	EKMQ451VSN331MA35S
	180	25.4×30	0.15	0.95	EKMQ401VSN181MQ30S		390	30×50	0.20	1.55	EKMQ451VSN391MR50S
	220	22×45	0.15	1.10	EKMQ401VSN221MP45S		390	35×40	0.20	1.55	EKMQ451VSN391MA40S
	220	25.4×35	0.15	1.10	EKMQ401VSN221MQ35S		470	35×45	0.20	1.74	EKMQ451VSN471MA45S
	220	30×25	0.15	1.10	EKMQ401VSN221MR25S		560	35×50	0.20	1.90	EKMQ451VSN561MA50S
	270	22×50	0.15	1.22	EKMQ401VSN271MP50S						



Upgrade!

KMQ Series

◆RATED RIPPLE CURRENT MULTIPLIERS

●Frequency Multipliers

Frequency(Hz)	50	120	300	1k	10k	50k
35, 50V _{dc}	0.95	1.00	1.03	1.05	1.08	1.08
160 to 250V _{dc}	0.81	1.00	1.17	1.32	1.45	1.50
315 to 450V _{dc}	0.77	1.00	1.16	1.30	1.41	1.43

The endurance of capacitors is shorted with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

SMM Series

- Downsize, longer life, and high ripple version of SMH series
- Endurance with ripple current : 3,000 hours at 85°C
- Non solvent-proof type
- RoHS Compliant

SMM

↓
Downsized
Longer life
Higher ripple
SMH




SPECIFICATIONS

Items	Characteristics		
Category	Temperature Range		
Rated Voltage Range	160 to 450V _{dc}		
Capacitance Tolerance	±20% (M)		(at 20°C, 120Hz)
Leakage Current	I≤3√CV Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 5 minutes)		
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	160 to 400V	420 & 450V
	tanδ (Max.)	0.15	0.20 (at 20°C, 120Hz)
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	160 to 400V	420 & 450V
	Z(−25°C)/Z(+20°C)	4	8 (at 120Hz)
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 3,000 hours at 85°C.		
	Capacitance change	≤±20% of the initial value	
	D.F. (tanδ)	≤200% of the initial specified value	
	Leakage current	≤The initial specified value	
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 85°C without voltage applied.		
	Capacitance change	≤±15% of the initial value	
	D.F. (tanδ)	≤150% of the initial specified value	
	Leakage current	≤The initial specified value	

DIMENSIONS [mm]


- Terminal Code : VS (φ20 to φ35) : Standard

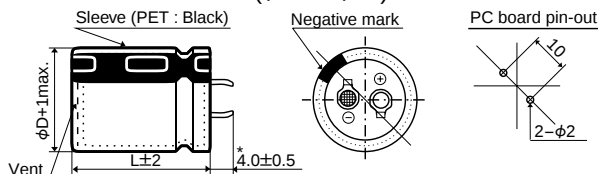


*φD=35mm : 3.5±0.5mm

No plastic disk is the standard design

- Terminal Code : LI (φ35)

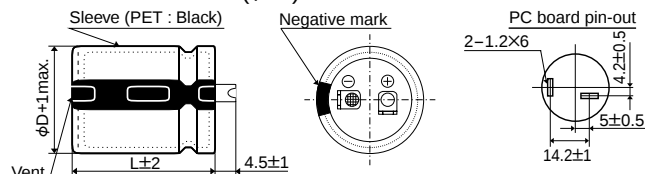

PART NUMBERING SYSTEM

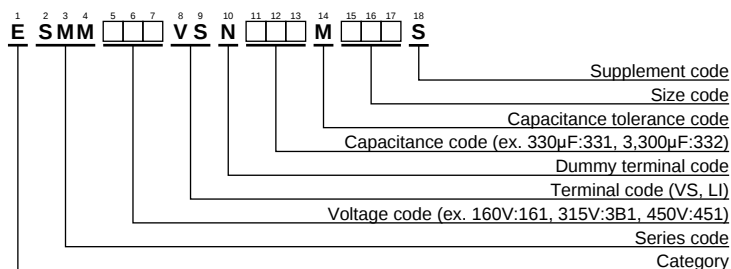

Please refer to "A guide to global code (snap-in type)"

RATED RIPPLE CURRENT MULTIPLIERS

- Frequency Multipliers

Frequency(Hz)	50	120	300	1k	10k	50k
160 to 250V _{dc}	0.81	1.00	1.17	1.32	1.45	1.50
315 to 450V _{dc}	0.77	1.00	1.16	1.30	1.41	1.43

The endurance of capacitors is shortened with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/ 85°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/ 85°C,120Hz)	Part No.
160	270	20×25	0.15	1.28	ESMM161VSN271MN25S	180	1,200	25.4×45	0.15	3.63	ESMM181VSN122MQ45S
	270	22×20	0.15	1.30	ESMM161VSN271MP20S		1,200	30×35	0.15	3.55	ESMM181VSN122MR35S
	330	20×25	0.15	1.55	ESMM161VSN331MN25S		1,200	35×30	0.15	3.49	ESMM181VSN122MA30S
	390	20×30	0.15	1.63	ESMM161VSN391MN30S		1,500	30×40	0.15	4.10	ESMM181VSN152MR40S
	390	22×25	0.15	1.63	ESMM161VSN391MP25S		1,500	35×35	0.15	4.02	ESMM181VSN152MA35S
	390	25.4×20	0.15	1.62	ESMM161VSN391MQ20S		1,800	30×45	0.15	4.55	ESMM181VSN182MR45S
	470	20×30	0.15	1.90	ESMM161VSN471MN30S		1,800	35×35	0.15	4.54	ESMM181VSN182MA35S
	470	22×30	0.15	1.86	ESMM161VSN471MP30S		2,200	35×40	0.15	4.83	ESMM181VSN222MA40S
	470	25.4×25	0.15	1.86	ESMM161VSN471MQ25S		2,700	35×50	0.15	5.30	ESMM181VSN272MA50S
	560	20×35	0.15	2.14	ESMM161VSN561MN35S	200	220	20×25	0.15	1.19	ESMM201VSN221MN25S
	560	22×30	0.15	2.15	ESMM161VSN561MP30S		220	22×20	0.15	1.18	ESMM201VSN221MP20S
	560	25.4×25	0.15	2.15	ESMM161VSN561MQ25S		270	20×25	0.15	1.39	ESMM201VSN271MN25S
	560	30×20	0.15	2.05	ESMM161VSN561MR20S		270	22×25	0.15	1.37	ESMM201VSN271MP25S
	680	20×40	0.15	2.35	ESMM161VSN681MN40S		270	25.4×20	0.15	1.35	ESMM201VSN271MQ20S
	680	22×35	0.15	2.35	ESMM161VSN681MP35S		330	20×30	0.15	1.56	ESMM201VSN331MN30S
	680	25.4×30	0.15	2.33	ESMM161VSN681MQ30S		330	22×25	0.15	1.51	ESMM201VSN331MP25S
	680	30×25	0.15	2.33	ESMM161VSN681MR25S		330	25.4×20	0.15	1.49	ESMM201VSN331MQ20S
	680	35×20	0.15	2.26	ESMM161VSN681MA20S		390	20×35	0.15	1.74	ESMM201VSN391MN35S
	820	20×45	0.15	2.64	ESMM161VSN821MN45S		390	22×30	0.15	1.73	ESMM201VSN391MP30S
	820	22×40	0.15	2.68	ESMM161VSN821MP40S		390	25.4×25	0.15	1.71	ESMM201VSN391MQ25S
	820	25.4×30	0.15	2.65	ESMM161VSN821MQ30S		390	30×20	0.15	1.71	ESMM201VSN391MR20S
	820	30×25	0.15	2.64	ESMM161VSN821MR25S		470	20×35	0.15	2.03	ESMM201VSN471MN35S
	820	35×20	0.15	2.49	ESMM161VSN821MA20S		470	22×30	0.15	1.97	ESMM201VSN471MP30S
	1,000	22×45	0.15	3.02	ESMM161VSN102MP45S		470	25.4×25	0.15	1.95	ESMM201VSN471MQ25S
	1,000	25.4×35	0.15	3.00	ESMM161VSN102MQ35S		470	30×20	0.15	1.88	ESMM201VSN471MR20S
	1,000	30×30	0.15	2.96	ESMM161VSN102MR30S		560	20×40	0.15	2.18	ESMM201VSN561MN40S
	1,000	35×25	0.15	3.13	ESMM161VSN102MA25S		560	22×35	0.15	2.18	ESMM201VSN561MP35S
	1,200	22×50	0.15	3.47	ESMM161VSN122MP50S		560	25.4×30	0.15	2.15	ESMM201VSN561MQ30S
	1,200	25.4×40	0.15	3.43	ESMM161VSN122MQ40S		560	30×25	0.15	2.15	ESMM201VSN561MR25S
	1,200	30×30	0.15	3.41	ESMM161VSN122MR30S		560	35×20	0.15	2.05	ESMM201VSN561MA20S
	1,200	35×25	0.15	3.40	ESMM161VSN122MA25S		680	20×50	0.15	2.48	ESMM201VSN681MN50S
	1,500	25.4×50	0.15	3.96	ESMM161VSN152MQ50S		680	22×40	0.15	2.48	ESMM201VSN681MP40S
	1,500	30×35	0.15	3.96	ESMM161VSN152MR35S		680	25.4×30	0.15	2.48	ESMM201VSN681MQ30S
	1,500	35×30	0.15	3.94	ESMM161VSN152MA30S		680	30×25	0.15	2.48	ESMM201VSN681MR25S
	1,800	30×40	0.15	4.31	ESMM161VSN182MR40S		680	35×20	0.15	2.36	ESMM201VSN681MA20S
	1,800	35×35	0.15	4.28	ESMM161VSN182MA35S		820	22×45	0.15	2.81	ESMM201VSN821MP45S
	2,200	30×50	0.15	4.96	ESMM161VSN222MR50S		820	25.4×35	0.15	2.79	ESMM201VSN821MQ35S
	2,200	35×40	0.15	4.96	ESMM161VSN222MA40S		820	30×30	0.15	2.80	ESMM201VSN821MR30S
	2,700	35×45	0.15	5.57	ESMM161VSN272MA45S		820	35×25	0.15	2.83	ESMM201VSN821MA25S
	3,300	35×50	0.15	6.21	ESMM161VSN332MA50S		1,000	22×50	0.15	3.28	ESMM201VSN102MP50S
180	220	22×20	0.15	1.18	ESMM181VSN221MP20S	220	1,000	25.4×40	0.15	3.28	ESMM201VSN102MQ40S
	270	20×25	0.15	1.29	ESMM181VSN271MN25S		1,000	30×35	0.15	3.15	ESMM201VSN102MR35S
	330	20×30	0.15	1.77	ESMM181VSN331MN30S		1,000	35×30	0.15	3.26	ESMM201VSN102MA30S
	330	22×25	0.15	1.77	ESMM181VSN331MP25S		1,200	25.4×45	0.15	3.61	ESMM201VSN122MQ45S
	330	25.4×20	0.15	1.49	ESMM181VSN331MQ20S		1,200	30×35	0.15	3.61	ESMM201VSN122MR35S
	390	20×30	0.15	1.84	ESMM181VSN391MN30S		1,200	35×30	0.15	3.57	ESMM201VSN122MA30S
	390	22×25	0.15	1.84	ESMM181VSN391MP25S		1,500	30×45	0.15	4.13	ESMM201VSN152MR45S
	470	20×35	0.15	1.91	ESMM181VSN471MN35S		1,500	35×35	0.15	4.06	ESMM201VSN152MA35S
	470	22×30	0.15	1.91	ESMM181VSN471MP30S		1,800	30×50	0.15	4.60	ESMM201VSN182MR50S
	470	25.4×25	0.15	2.08	ESMM181VSN471MQ25S		1,800	35×40	0.15	4.59	ESMM201VSN182MA40S
	470	30×20	0.15	1.88	ESMM181VSN471MR20S		2,200	35×45	0.15	5.25	ESMM201VSN222MA45S
	560	20×40	0.15	2.15	ESMM181VSN561MN40S		180	22×20	0.15	1.06	ESMM221VSN181MP20S
	560	22×35	0.15	2.25	ESMM181VSN561MP35S		220	20×25	0.15	1.25	ESMM221VSN221MN25S
	560	25.4×25	0.15	2.25	ESMM181VSN561MQ25S		270	20×30	0.15	1.46	ESMM221VSN271MN30S
	680	20×45	0.15	2.41	ESMM181VSN681MN45S		270	22×25	0.15	1.47	ESMM221VSN271MP25S
	680	22×35	0.15	2.48	ESMM181VSN681MP35S		270	25.4×20	0.15	1.35	ESMM221VSN271MQ20S
	680	25.4×30	0.15	2.50	ESMM181VSN681MQ30S		330	20×35	0.15	1.64	ESMM221VSN331MN35S
	680	30×25	0.15	2.46	ESMM181VSN681MR25S		330	22×30	0.15	1.70	ESMM221VSN331MP30S
	680	35×20	0.15	2.26	ESMM181VSN681MA20S		330	25.4×25	0.15	1.69	ESMM221VSN331MQ25S
	820	20×50	0.15	2.72	ESMM181VSN821MN50S		330	30×20	0.15	1.58	ESMM221VSN331MR20S
	820	22×40	0.15	2.86	ESMM181VSN821MP40S		390	20×35	0.15	1.84	ESMM221VSN391MN35S
	820	25.4×35	0.15	2.75	ESMM181VSN821MQ35S		390	22×30	0.15	1.89	ESMM221VSN391MP30S
	820	30×25	0.15	2.69	ESMM181VSN821MR25S		390	25.4×25	0.15	1.84	ESMM221VSN391MQ25S
	1,000	22×50	0.15	3.10	ESMM181VSN102MP50S		390	30×20	0.15	1.71	ESMM221VSN391MR20S
	1,000	25.4×40	0.15	3.06	ESMM181VSN102MQ40S		470	20×40	0.15	2.12	ESMM221VSN471MN40S
	1,000	30×30	0.15	3.10	ESMM181VSN102MR30S		470	22×35	0.15	2.08	ESMM221VSN471MP35S
	1,000	35×25	0.15	2.98	ESMM181VSN102MA25S		470	25.4×30	0.15	2.08	ESMM221VSN471MQ30S

◆STANDARD RATINGS


WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/ 85°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/ 85°C,120Hz)	Part No.
220	470	30×25	0.15	2.12	ESMM221VSN471MR25S	315	180	22×30	0.15	1.29	ESMM3B1VSN181MP30S
	470	35×20	0.15	1.88	ESMM221VSN471MA20S		180	25.4×25	0.15	1.38	ESMM3B1VSN181MQ25S
	560	20×50	0.15	2.33	ESMM221VSN561MN50S		180	30×20	0.15	1.16	ESMM3B1VSN181MR20S
	560	22×40	0.15	2.33	ESMM221VSN561MP40S		220	20×35	0.15	1.30	ESMM3B1VSN221MN35S
	560	25.4×35	0.15	2.38	ESMM221VSN561MQ35S		220	22×30	0.15	1.41	ESMM3B1VSN221MP30S
	560	30×25	0.15	2.31	ESMM221VSN561MR25S		220	25.4×25	0.15	1.47	ESMM3B1VSN221MQ25S
	560	35×20	0.15	2.14	ESMM221VSN561MA20S		220	30×20	0.15	1.28	ESMM3B1VSN221MR20S
	680	22×45	0.15	2.63	ESMM221VSN681MP45S		270	20×45	0.15	1.52	ESMM3B1VSN271MN45S
	680	25.4×35	0.15	2.68	ESMM221VSN681MQ35S		270	22×35	0.15	1.68	ESMM3B1VSN271MP35S
	680	30×30	0.15	2.62	ESMM221VSN681MR30S		270	25.4×30	0.15	1.70	ESMM3B1VSN271MQ30S
	680	35×25	0.15	2.58	ESMM221VSN681MA25S		270	30×25	0.15	1.55	ESMM3B1VSN271MR25S
	820	25.4×45	0.15	3.01	ESMM221VSN821MQ45S		270	35×20	0.15	1.43	ESMM3B1VSN271MA20S
	820	30×35	0.15	2.99	ESMM221VSN821MR35S		330	20×50	0.15	1.73	ESMM3B1VSN331MN50S
	820	35×30	0.15	2.79	ESMM221VSN821MA30S		330	22×40	0.15	1.91	ESMM3B1VSN331MP40S
	1,000	25.4×50	0.15	3.40	ESMM221VSN102MQ50S		330	25.4×35	0.15	1.94	ESMM3B1VSN331MQ35S
	1,000	30×35	0.15	3.42	ESMM221VSN102MR35S		330	30×25	0.15	1.98	ESMM3B1VSN331MR25S
	1,000	35×30	0.15	3.29	ESMM221VSN102MA30S		390	22×45	0.15	2.07	ESMM3B1VSN391MP45S
	1,200	30×40	0.15	3.88	ESMM221VSN122MR40S		390	25.4×40	0.15	2.11	ESMM3B1VSN391MQ40S
	1,200	35×35	0.15	3.68	ESMM221VSN122MA35S		390	30×30	0.15	2.15	ESMM3B1VSN391MR30S
	1,500	30×50	0.15	4.44	ESMM221VSN152MR50S		390	35×25	0.15	1.95	ESMM3B1VSN391MA25S
	1,500	35×40	0.15	4.10	ESMM221VSN152MA40S		470	25.4×45	0.15	2.31	ESMM3B1VSN471MQ45S
	1,800	35×45	0.15	4.52	ESMM221VSN182MA45S		470	30×35	0.15	2.38	ESMM3B1VSN471MR35S
250	150	22×20	0.15	0.97	ESMM251VSN151MP20S	350	470	35×30	0.15	2.46	ESMM3B1VSN471MA30S
	180	20×25	0.15	1.20	ESMM251VSN181MN25S		560	25.4×50	0.15	2.46	ESMM3B1VSN561MQ50S
	180	22×20	0.15	1.06	ESMM251VSN181MP20S		560	30×35	0.15	2.63	ESMM3B1VSN561MR35S
	220	20×25	0.15	1.26	ESMM251VSN221MN25S		560	35×30	0.15	2.69	ESMM3B1VSN561MA30S
	220	22×25	0.15	1.24	ESMM251VSN221MP25S		680	30×45	0.15	2.82	ESMM3B1VSN681MR45S
	220	25.4×20	0.15	1.22	ESMM251VSN221MQ20S		680	35×35	0.15	3.05	ESMM3B1VSN681MA35S
	270	20×30	0.15	1.42	ESMM251VSN271MN30S		820	30×50	0.15	3.28	ESMM3B1VSN821MR50S
	270	22×25	0.15	1.50	ESMM251VSN271MP25S		820	35×40	0.15	3.45	ESMM3B1VSN821MA40S
	330	20×35	0.15	1.68	ESMM251VSN331MN35S		1,000	35×45	0.15	3.59	ESMM3B1VSN102MA45S
	330	22×30	0.15	1.66	ESMM251VSN331MP30S		82	22×20	0.15	0.72	ESMM351VSN820MP20S
	330	25.4×25	0.15	1.61	ESMM251VSN331MQ25S		100	20×25	0.15	0.81	ESMM351VSN101MN25S
	330	30×20	0.15	1.58	ESMM251VSN331MR20S		120	20×30	0.15	0.96	ESMM351VSN121MN30S
	390	20×40	0.15	1.92	ESMM251VSN391MN40S		120	22×25	0.15	1.04	ESMM351VSN121MP25S
	390	22×35	0.15	1.88	ESMM251VSN391MP35S		120	25.4×20	0.15	0.90	ESMM351VSN121MQ20S
	390	25.4×30	0.15	1.88	ESMM251VSN391MQ30S		150	20×30	0.15	1.10	ESMM351VSN151MN30S
	390	30×25	0.15	1.86	ESMM251VSN391MR25S		150	22×30	0.15	1.20	ESMM351VSN151MP30S
	390	35×20	0.15	1.71	ESMM251VSN391MA20S		150	25.4×25	0.15	1.22	ESMM351VSN151MQ25S
	470	20×50	0.15	2.06	ESMM251VSN471MN50S		150	30×20	0.15	1.06	ESMM351VSN151MR20S
	470	22×35	0.15	2.15	ESMM251VSN471MP35S		180	20×35	0.15	1.24	ESMM351VSN181MN35S
	470	25.4×35	0.15	2.15	ESMM251VSN471MQ35S		180	22×30	0.15	1.34	ESMM351VSN181MP30S
	470	30×25	0.15	2.05	ESMM251VSN471MR25S		180	25.4×25	0.15	1.37	ESMM351VSN181MQ25S
	470	35×20	0.15	1.88	ESMM251VSN471MA20S		180	30×20	0.15	1.16	ESMM351VSN181MR20S
315	560	22×40	0.15	2.48	ESMM251VSN561MP40S	350	220	20×45	0.15	1.37	ESMM351VSN221MN45S
	560	25.4×35	0.15	2.35	ESMM251VSN561MQ35S		220	22×35	0.15	1.47	ESMM351VSN221MP35S
	560	30×25	0.15	2.35	ESMM251VSN561MR25S		220	25.4×30	0.15	1.53	ESMM351VSN221MQ30S
	680	22×50	0.15	2.61	ESMM251VSN681MP50S		220	30×25	0.15	1.54	ESMM351VSN221MR25S
	680	25.4×40	0.15	2.67	ESMM251VSN681MQ40S		220	35×20	0.15	1.29	ESMM351VSN221MA20S
	680	30×30	0.15	2.71	ESMM251VSN681MR30S		270	20×50	0.15	1.56	ESMM351VSN271MN50S
	680	35×25	0.15	2.58	ESMM251VSN681MA25S		270	22×40	0.15	1.70	ESMM351VSN271MP40S
	820	25.4×45	0.15	3.01	ESMM251VSN821MQ45S		270	25.4×35	0.15	1.73	ESMM351VSN271MQ35S
	820	30×35	0.15	2.98	ESMM251VSN821MR35S		270	30×25	0.15	1.80	ESMM351VSN271MR25S
	820	35×30	0.15	2.96	ESMM251VSN821MA30S		270	35×20	0.15	1.49	ESMM351VSN271MA20S
	1,000	30×40	0.15	3.56	ESMM251VSN102MR40S		330	22×45	0.15	1.87	ESMM351VSN331MP45S
	1,000	35×35	0.15	3.48	ESMM251VSN102MA35S		330	25.4×35	0.15	1.97	ESMM351VSN331MQ35S
	1,200	30×45	0.15	3.99	ESMM251VSN122MR45S		330	30×30	0.15	2.03	ESMM351VSN331MR30S
	1,200	35×35	0.15	3.84	ESMM251VSN122MA35S		330	35×25	0.15	1.80	ESMM351VSN331MA25S
	1,500	35×40	0.15	4.33	ESMM251VSN152MA40S		390	25.4×40	0.15	2.14	ESMM351VSN391MQ40S
	1,800	35×50	0.15	4.54	ESMM251VSN182MA50S		390	30×35	0.15	2.23	ESMM351VSN391MR35S
	100	22×20	0.15	0.79	ESMM3B1VSN101MP20S		390	35×30	0.15	2.30	ESMM351VSN391MA30S
	120	20×25	0.15	0.89	ESMM3B1VSN121MN25S		470	25.4×50	0.15	2.55	ESMM351VSN471MQ50S
	120	25.4×20	0.15	0.90	ESMM3B1VSN121MQ20S		470	30×35	0.15	2.53	ESMM351VSN471MR35S
	150	20×30	0.15	1.05	ESMM3B1VSN151MN30S		470	35×30	0.15	2.55	ESMM351VSN471MA30S
	150	22×25	0.15	1.06	ESMM3B1VSN151MP25S		560	30×40	0.15	2.73	ESMM351VSN561MR40S
	150	25.4×20	0.15	1.00	ESMM3B1VSN151MQ20S		560	35×35	0.15	2.75	ESMM351VSN561MA35S
	180	20×35	0.15	1.18	ESMM3B1VSN181MN35S		680	30×50	0.15	3.15	ESMM351VSN681MR50S

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φDXL(mm)	tanδ	Rated ripple current (Arms/ 85°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φDXL(mm)	tanδ	Rated ripple current (Arms/ 85°C,120Hz)	Part No.
350	680	35 × 40	0.15	3.15	ESMM351VSN681MA40S		180	20 × 50	0.20	1.27	ESMM421VSN181MN50S
	820	35 × 45	0.15	3.47	ESMM351VSN821MA45S		180	22 × 40	0.20	1.33	ESMM421VSN181MP40S
	1,000	35 × 50	0.15	3.60	ESMM351VSN102MA50S		180	25.4 × 35	0.20	1.42	ESMM421VSN181MQ35S
400	68	20 × 25	0.15	0.75	ESMM401VSN680MN25S	420	180	30 × 25	0.20	1.48	ESMM421VSN181MR25S
	68	22 × 20	0.15	0.65	ESMM401VSN680MP20S		180	35 × 20	0.20	1.16	ESMM421VSN181MA20S
	82	20 × 25	0.15	0.82	ESMM401VSN820MN25S		220	22 × 45	0.20	1.55	ESMM421VSN221MP45S
	82	22 × 25	0.15	0.84	ESMM401VSN820MP25S		220	25.4 × 35	0.20	1.58	ESMM421VSN221MQ35S
	82	25.4 × 20	0.15	0.74	ESMM401VSN820MQ20S		220	30 × 30	0.20	1.65	ESMM421VSN221MR30S
	100	20 × 30	0.15	0.95	ESMM401VSN101MP30S		220	35 × 25	0.20	1.47	ESMM421VSN221MA25S
	100	22 × 25	0.15	0.99	ESMM401VSN101MP25S		270	25.4 × 40	0.20	1.74	ESMM421VSN271MQ40S
	100	25.4 × 20	0.15	0.82	ESMM401VSN101MQ20S		270	30 × 35	0.20	1.90	ESMM421VSN271MR35S
	120	20 × 35	0.15	1.07	ESMM401VSN121MN35S		270	35 × 30	0.20	1.94	ESMM421VSN271MA30S
	120	22 × 30	0.15	1.09	ESMM401VSN121MP30S		330	25.4 × 50	0.20	2.20	ESMM421VSN331MQ50S
	120	25.4 × 25	0.15	1.13	ESMM401VSN121MQ25S		330	30 × 35	0.20	1.98	ESMM421VSN331MR35S
	120	30 × 20	0.15	0.95	ESMM401VSN121MR20S		330	35 × 35	0.20	2.17	ESMM421VSN331MA35S
	150	20 × 40	0.15	1.22	ESMM401VSN151MN40S		390	30 × 40	0.20	2.22	ESMM421VSN391MR40S
	150	22 × 35	0.15	1.24	ESMM401VSN151MP35S		390	35 × 35	0.20	2.27	ESMM421VSN391MA35S
	150	25.4 × 30	0.15	1.27	ESMM401VSN151MQ30S		470	30 × 45	0.20	2.50	ESMM421VSN471MR45S
	150	30 × 25	0.15	1.20	ESMM401VSN151MR25S		470	35 × 40	0.20	2.61	ESMM421VSN471MA40S
	180	20 × 45	0.15	1.28	ESMM401VSN181MN45S		560	35 × 45	0.20	2.95	ESMM421VSN561MA45S
	180	22 × 40	0.15	1.41	ESMM401VSN181MP40S		680	35 × 50	0.20	3.15	ESMM421VSN681MA50S
	180	25.4 × 30	0.15	1.44	ESMM401VSN181MQ30S	450	47	22 × 20	0.20	0.54	ESMM451VSN470MP20S
	180	30 × 25	0.15	1.52	ESMM401VSN181MR25S		56	20 × 25	0.20	0.61	ESMM451VSN560MN25S
	180	35 × 20	0.15	1.16	ESMM401VSN181MA20S		56	22 × 20	0.20	0.59	ESMM451VSN560MP20S
	220	20 × 50	0.15	1.41	ESMM401VSN221MN50S		68	20 × 30	0.20	0.71	ESMM451VSN680MN30S
	220	22 × 45	0.15	1.58	ESMM401VSN221MP45S		68	22 × 25	0.20	0.71	ESMM451VSN680MP25S
	220	25.4 × 35	0.15	1.64	ESMM401VSN221MQ35S		68	25.4 × 20	0.20	0.68	ESMM451VSN680MQ20S
	220	30 × 30	0.15	1.66	ESMM401VSN221MR30S		82	20 × 35	0.20	0.80	ESMM451VSN820MN35S
	220	35 × 25	0.15	1.47	ESMM401VSN221MA25S		82	22 × 25	0.20	0.86	ESMM451VSN820MP25S
	270	22 × 50	0.15	1.65	ESMM401VSN271MP50S		82	25.4 × 20	0.20	0.74	ESMM451VSN820MQ20S
	270	25.4 × 40	0.15	1.79	ESMM401VSN271MQ40S		82	30 × 20	0.20	0.79	ESMM451VSN820MR20S
	270	30 × 30	0.15	1.82	ESMM401VSN271MR30S		100	20 × 35	0.20	0.88	ESMM451VSN101MN35S
	270	35 × 25	0.15	1.63	ESMM401VSN271MA25S		100	22 × 30	0.20	0.95	ESMM451VSN101MP30S
	330	25.4 × 45	0.15	2.00	ESMM401VSN331MQ45S		100	25.4 × 25	0.20	0.97	ESMM451VSN101MQ25S
	330	30 × 35	0.15	2.05	ESMM401VSN331MR35S		100	30 × 20	0.20	0.87	ESMM451VSN101MR20S
	330	35 × 30	0.15	2.05	ESMM401VSN331MA30S		120	20 × 40	0.20	0.99	ESMM451VSN121MN40S
	390	25.4 × 50	0.15	2.12	ESMM401VSN391MQ50S		120	22 × 35	0.20	1.07	ESMM451VSN121MP35S
	390	30 × 40	0.15	2.26	ESMM401VSN391MR40S		120	25.4 × 30	0.20	1.09	ESMM451VSN121MQ30S
	390	35 × 35	0.15	2.28	ESMM401VSN391MA35S		120	30 × 25	0.20	1.12	ESMM451VSN121MR25S
	470	30 × 45	0.15	2.51	ESMM401VSN471MR45S		120	35 × 20	0.20	0.99	ESMM451VSN121MA20S
	470	35 × 35	0.15	2.54	ESMM401VSN471MA35S		150	20 × 45	0.20	1.13	ESMM451VSN151MN45S
	560	30 × 50	0.15	2.85	ESMM401VSN561MR50S		150	22 × 40	0.20	1.18	ESMM451VSN151MP40S
	560	35 × 40	0.15	2.85	ESMM401VSN561MA40S		150	25.4 × 30	0.20	1.25	ESMM451VSN151MQ30S
	680	35 × 50	0.15	3.10	ESMM401VSN681MA50S		150	30 × 25	0.20	1.29	ESMM451VSN151MR25S
420	47	22 × 20	0.20	0.54	ESMM421VSN470MP20S		150	35 × 20	0.20	1.06	ESMM451VSN151MA20S
	56	20 × 25	0.20	0.58	ESMM421VSN560MN25S		180	22 × 45	0.20	1.32	ESMM451VSN181MP45S
	56	22 × 20	0.20	0.59	ESMM421VSN560MP20S		180	25.4 × 35	0.20	1.40	ESMM451VSN181MQ35S
	68	20 × 25	0.20	0.70	ESMM421VSN680MN25S		180	30 × 30	0.20	1.45	ESMM451VSN181MR30S
	68	25.4 × 20	0.20	0.68	ESMM421VSN680MQ20S		180	35 × 25	0.20	1.33	ESMM451VSN181MA25S
	82	20 × 30	0.20	0.80	ESMM421VSN820MN30S		220	22 × 50	0.20	1.48	ESMM451VSN221MP50S
	82	22 × 25	0.20	0.85	ESMM421VSN820MP25S		220	25.4 × 40	0.20	1.59	ESMM451VSN221MQ40S
	82	25.4 × 20	0.20	0.74	ESMM421VSN820MQ20S		220	30 × 30	0.20	1.64	ESMM451VSN221MR30S
	100	20 × 35	0.20	0.90	ESMM421VSN101MN35S		220	35 × 25	0.20	1.66	ESMM451VSN221MA25S
	100	22 × 30	0.20	0.97	ESMM421VSN101MP30S		270	25.4 × 45	0.20	1.73	ESMM451VSN271MQ45S
	100	25.4 × 25	0.20	0.98	ESMM421VSN101MQ25S		270	30 × 35	0.20	1.89	ESMM451VSN271MR35S
	100	30 × 20	0.20	0.87	ESMM421VSN101MR20S		270	35 × 30	0.20	1.90	ESMM451VSN271MA30S
	120	20 × 35	0.20	1.04	ESMM421VSN121MN35S		330	25.4 × 50	0.20	2.12	ESMM451VSN331MQ50S
	120	22 × 30	0.20	1.07	ESMM421VSN121MP30S		330	30 × 40	0.20	2.12	ESMM451VSN331MR40S
	120	25.4 × 25	0.20	1.08	ESMM421VSN121MQ25S		330	35 × 35	0.20	2.15	ESMM451VSN331MA35S
	120	30 × 20	0.20	0.95	ESMM421VSN121MR20S		390	30 × 45	0.20	2.35	ESMM451VSN391MR45S
	150	20 × 40	0.20	1.17	ESMM421VSN151MN40S		390	35 × 40	0.20	2.38	ESMM451VSN391MA40S
	150	22 × 35	0.20	1.21	ESMM421VSN151MP35S		470	30 × 50	0.20	2.65	ESMM451VSN471MR50S
	150	25.4 × 30	0.20	1.26	ESMM421VSN151MQ30S		470	35 × 45	0.20	2.68	ESMM451VSN471MA45S
	150	30 × 25	0.20	1.30	ESMM421VSN151MR25S		560	35 × 50	0.20	2.88	ESMM451VSN561MA50S
	150	35 × 20	0.20	1.11	ESMM421VSN151MA20S						

KMM Series

- Downsize, longer life, and high ripple version of KMH series
- Endurance with ripple current : 2,000 to 3,000 hours at 105°C
- Non solvent-proof type
- RoHS Compliant




SPECIFICATIONS


Items	Characteristics		
Category	–25 to +105°C		
Temperature Range			
Rated Voltage Range	160 to 450V _{dc}		
Capacitance Tolerance	±20% (M)		(at 20°C, 120Hz)
Leakage Current	I≤3√CV Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 5 minutes)		
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	160 to 400V	420 & 450V
	tanδ (Max.)	0.15	0.20 (at 20°C, 120Hz)
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	160 to 400V	420 & 450V
	Z(–25°C)/Z(+20°C)	4	8 (at 120Hz)
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 3,000 hours (2,000 hours for ϕ20×20L products) at 105°C.		
	Capacitance change	≤±20% of the initial value	
	D.F. (tanδ)	≤200% of the initial specified value	
	Leakage current	≤The initial specified value	
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.		
	Capacitance change	≤±15% of the initial value	
	D.F. (tanδ)	≤150% of the initial specified value	
	Leakage current	≤The initial specified value	

DIMENSIONS [mm]

- Terminal Code : VS (φ20 to φ35) : Standard

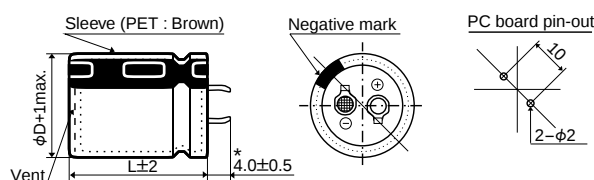


- Terminal Code : LI (φ35)

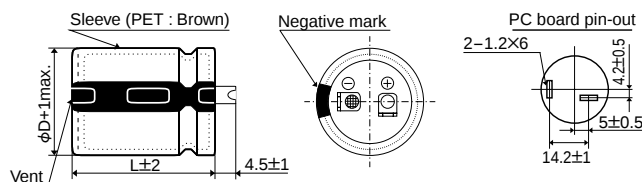

*φD=35mm : 3.5±0.5mm

No plastic disk is the standard design

PART NUMBERING SYSTEM

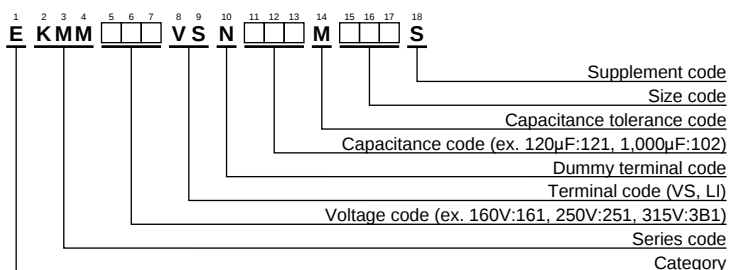

Please refer to "A guide to global code (snap-in type)"

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φDXL(mm)	tanδ	Rated ripple current (Arms/ 105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φDXL(mm)	tanδ	Rated ripple current (Arms/ 105°C,120Hz)	Part No.
160	180	20×20	0.15	0.68	EKMM161VSN181MN20S	180	560	20×45	0.15	1.55	EKMM181VSN561MN45S
	220	20×25	0.15	0.85	EKMM161VSN221MN25S		560	22×40	0.15	1.67	EKMM181VSN561MP40S
	220	22×20	0.15	0.81	EKMM161VSN221MP20S		560	25.4×30	0.15	1.67	EKMM181VSN561MQ30S
	270	20×25	0.15	1.10	EKMM161VSN271MN25S		560	30×25	0.15	1.67	EKMM181VSN561MR25S
	270	25.4×20	0.15	0.98	EKMM161VSN271MQ20S		560	35×20	0.15	1.43	EKMM181VSN561MA20S
	330	20×30	0.15	1.20	EKMM161VSN331MN30S		680	20×50	0.15	1.75	EKMM181VSN681MN50S
	330	22×25	0.15	1.20	EKMM161VSN331MP25S		680	22×45	0.15	1.78	EKMM181VSN681MP45S
	330	25.4×20	0.15	1.02	EKMM161VSN331MQ20S		680	25.4×35	0.15	1.78	EKMM181VSN681MQ35S
	390	20×30	0.15	1.30	EKMM161VSN391MN30S		680	30×30	0.15	1.78	EKMM181VSN681MR30S
	390	22×25	0.15	1.30	EKMM161VSN391MP25S		680	35×25	0.15	1.83	EKMM181VSN681MA25S
	390	25.4×25	0.15	1.26	EKMM161VSN391MQ25S		820	22×50	0.15	2.04	EKMM181VSN821MP50S
	390	30×20	0.15	1.25	EKMM161VSN391MR20S		820	25.4×40	0.15	2.04	EKMM181VSN821MQ40S
	470	20×35	0.15	1.34	EKMM161VSN471MN35S		820	30×30	0.15	2.04	EKMM181VSN821MR30S
	470	22×30	0.15	1.55	EKMM161VSN471MP30S		820	35×25	0.15	2.04	EKMM181VSN821MA25S
	470	25.4×25	0.15	1.55	EKMM161VSN471MQ25S		1,000	25.4×45	0.15	2.30	EKMM181VSN102MQ45S
	470	30×20	0.15	1.30	EKMM161VSN471MR20S		1,000	30×35	0.15	2.30	EKMM181VSN102MR35S
	560	20×40	0.15	1.50	EKMM161VSN561MA40S		1,000	35×30	0.15	2.30	EKMM181VSN102MA30S
	560	22×35	0.15	1.67	EKMM161VSN561MP35S		1,200	25.4×50	0.15	2.55	EKMM181VSN122MQ50S
	560	25.4×30	0.15	1.67	EKMM161VSN561MQ30S		1,200	30×40	0.15	2.55	EKMM181VSN122MR40S
	560	30×25	0.15	1.67	EKMM161VSN561MR25S		1,200	35×30	0.15	2.55	EKMM181VSN122MA30S
	560	35×20	0.15	1.46	EKMM161VSN561MA20S		1,500	30×45	0.15	2.90	EKMM181VSN152MR45S
	680	20×45	0.15	1.70	EKMM161VSN681MN45S		1,500	35×35	0.15	2.90	EKMM181VSN152MA35S
	680	22×40	0.15	1.82	EKMM161VSN681MP40S		1,800	30×60	0.15	3.49	EKMM181VSN182MR60S
	680	25.4×30	0.15	1.82	EKMM161VSN681MQ30S		1,800	35×40	0.15	3.30	EKMM181VSN182MA40S
	680	30×25	0.15	1.82	EKMM161VSN681MR25S		2,200	35×50	0.15	3.65	EKMM181VSN222MA50S
	680	35×20	0.15	1.51	EKMM161VSN681MA20S		2,700	35×60	0.15	4.19	EKMM181VSN272MA60S
	820	22×45	0.15	2.04	EKMM161VSN821MP45S	200	120	20×20	0.15	0.56	EKMM201VSN121MN20S
	820	25.4×35	0.15	2.04	EKMM161VSN821MQ35S		150	20×25	0.15	0.71	EKMM201VSN151MN25S
	820	30×30	0.15	2.04	EKMM161VSN821MR30S		150	22×20	0.15	0.73	EKMM201VSN151MP20S
	820	35×25	0.15	2.04	EKMM161VSN821MA25S		180	20×25	0.15	0.77	EKMM201VSN181MN25S
	1,000	22×50	0.15	2.25	EKMM161VSN102MP50S		180	22×20	0.15	0.80	EKMM201VSN181MP20S
	1,000	25.4×40	0.15	2.25	EKMM161VSN102MQ40S		220	20×25	0.15	1.00	EKMM201VSN221MN25S
	1,000	30×30	0.15	2.25	EKMM161VSN102MR30S		220	25.4×20	0.15	0.85	EKMM201VSN221MQ20S
	1,000	35×25	0.15	2.25	EKMM161VSN102MA25S		270	20×30	0.15	1.10	EKMM201VSN271MN30S
	1,200	25.4×45	0.15	2.49	EKMM161VSN122MQ45S		270	22×25	0.15	1.10	EKMM201VSN271MP25S
	1,200	30×35	0.15	2.49	EKMM161VSN122MR35S		270	30×20	0.15	1.05	EKMM201VSN271MR20S
	1,200	35×30	0.15	2.49	EKMM161VSN122MA30S		330	20×35	0.15	1.20	EKMM201VSN331MN35S
	1,500	25.4×60	0.15	2.97	EKMM161VSN152MQ60S		330	22×30	0.15	1.25	EKMM201VSN331MP30S
	1,500	30×40	0.15	2.84	EKMM161VSN152MR40S		330	25.4×25	0.15	1.25	EKMM201VSN331MQ25S
	1,500	35×30	0.15	2.84	EKMM161VSN152MA30S		330	30×20	0.15	1.10	EKMM201VSN331MR20S
	1,800	30×45	0.15	3.32	EKMM161VSN182MR45S		390	20×40	0.15	1.31	EKMM201VSN391MN40S
	1,800	35×35	0.15	3.00	EKMM161VSN182MA35S		390	22×30	0.15	1.35	EKMM201VSN391MP30S
	2,200	30×60	0.15	3.86	EKMM161VSN222MR60S		390	25.4×25	0.15	1.35	EKMM201VSN391MQ25S
	2,200	35×45	0.15	3.50	EKMM161VSN222MA45S		390	35×20	0.15	1.30	EKMM201VSN391MA20S
	2,700	35×50	0.15	4.00	EKMM161VSN272MA50S		470	20×45	0.15	1.45	EKMM201VSN471MN45S
	3,300	35×60	0.15	4.63	EKMM161VSN332MA60S		470	22×35	0.15	1.50	EKMM201VSN471MP35S
180	150	20×20	0.15	0.62	EKMM181VSN151MN20S		470	25.4×30	0.15	1.50	EKMM201VSN471MQ30S
	180	20×25	0.15	0.77	EKMM181VSN181MN25S		470	30×25	0.15	1.50	EKMM201VSN471MR25S
	180	22×20	0.15	0.80	EKMM181VSN181MP20S		470	35×20	0.15	1.41	EKMM201VSN471MA20S
	220	20×25	0.15	1.00	EKMM181VSN221MN25S		560	20×50	0.15	1.58	EKMM201VSN561MN50S
	220	25.4×20	0.15	0.90	EKMM181VSN221MQ20S		560	22×40	0.15	1.67	EKMM201VSN561MP40S
	270	20×30	0.15	1.10	EKMM181VSN271MN30S		560	25.4×30	0.15	1.67	EKMM201VSN561MQ30S
	270	22×25	0.15	1.00	EKMM181VSN271MP25S		560	30×25	0.15	1.67	EKMM201VSN561MR25S
	270	25.4×20	0.15	0.95	EKMM181VSN271MQ20S		680	22×45	0.15	1.78	EKMM201VSN681MP45S
	330	20×30	0.15	1.20	EKMM181VSN331MN30S		680	25.4×35	0.15	1.78	EKMM201VSN681MQ35S
	330	22×25	0.15	1.20	EKMM181VSN331MP25S		680	30×30	0.15	1.78	EKMM201VSN681MR30S
	330	25.4×25	0.15	1.16	EKMM181VSN331MQ25S		680	35×25	0.15	1.78	EKMM201VSN681MA25S
	330	30×20	0.15	1.15	EKMM181VSN331MR20S		820	25.4×45	0.15	2.04	EKMM201VSN821MQ45S
	390	20×35	0.15	1.30	EKMM181VSN391MN35S		820	30×30	0.15	2.04	EKMM201VSN821MR30S
	390	22×30	0.15	1.35	EKMM181VSN391MP30S		820	35×25	0.15	2.04	EKMM201VSN821MA25S
	390	25.4×25	0.15	1.35	EKMM181VSN391MQ25S		1,000	25.4×50	0.15	2.30	EKMM201VSN102MQ50S
	390	30×20	0.15	1.20	EKMM181VSN391MR20S		1,000	30×35	0.15	2.30	EKMM201VSN102MR35S
	470	20×40	0.15	1.40	EKMM181VSN471MN40S		1,000	35×30	0.15	2.30	EKMM201VSN102MA30S
	470	22×35	0.15	1.50	EKMM181VSN471MP35S		1,200	25.4×60	0.15	2.66	EKMM201VSN122MQ60S
	470	25.4×30	0.15	1.50	EKMM181VSN471MQ30S		1,200	30×40	0.15	2.65	EKMM201VSN122MR40S
	470	30×25	0.15	1.50	EKMM181VSN471MR25S		1,200	35×35	0.15	2.65	EKMM201VSN122MA35S
	470	35×20	0.15	1.36	EKMM181VSN471MA20S		1,500	30×50	0.15	3.08	EKMM201VSN152MR50S

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/ 105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/ 105°C,120Hz)	Part No.
200	1,500	35×40	0.15	3.08	EKMM201VSN152MA40S		330	30×25	0.15	1.30	EKMM251VSN331MR25S
	1,800	30×60	0.15	3.49	EKMM201VSN182MR60S		330	35×20	0.15	1.16	EKMM251VSN331MA20S
	1,800	35×45	0.15	3.48	EKMM201VSN182MA45S		390	20×50	0.15	1.45	EKMM251VSN391MN50S
	2,200	35×50	0.15	3.78	EKMM201VSN222MA50S		390	22×40	0.15	1.49	EKMM251VSN391MP40S
220	120	20×20	0.15	0.56	EKMM221VSN121MN20S	250	390	25.4×35	0.15	1.49	EKMM251VSN391MQ35S
	150	20×25	0.15	0.73	EKMM221VSN151MN25S		390	30×25	0.15	1.49	EKMM251VSN391MR25S
	150	22×20	0.15	0.67	EKMM221VSN151MP20S		470	22×45	0.15	1.65	EKMM251VSN471MP45S
	180	20×25	0.15	0.90	EKMM221VSN181MN25S		470	25.4×35	0.15	1.65	EKMM251VSN471MQ35S
	180	25.4×20	0.15	0.76	EKMM221VSN181MQ20S		470	30×30	0.15	1.65	EKMM251VSN471MR30S
	220	20×30	0.15	1.00	EKMM221VSN221MN30S		470	35×25	0.15	1.65	EKMM251VSN471MA25S
	220	22×25	0.15	1.00	EKMM221VSN221MP25S		560	22×50	0.15	1.67	EKMM251VSN561MP50S
	220	25.4×20	0.15	0.84	EKMM221VSN221MQ20S		560	25.4×40	0.15	1.80	EKMM251VSN561MQ40S
	270	20×35	0.15	1.15	EKMM221VSN271MN35S		560	30×30	0.15	1.80	EKMM251VSN561MR30S
	270	22×30	0.15	1.15	EKMM221VSN271MP30S		560	35×25	0.15	1.80	EKMM251VSN561MA25S
	270	25.4×25	0.15	1.08	EKMM221VSN271MQ25S		680	25.4×50	0.15	2.00	EKMM251VSN681MQ50S
	270	30×20	0.15	0.98	EKMM221VSN271MR20S		680	30×35	0.15	2.00	EKMM251VSN681MR35S
	330	20×40	0.15	1.25	EKMM221VSN331MN40S		680	35×30	0.15	2.00	EKMM251VSN681MA30S
	330	22×35	0.15	1.25	EKMM221VSN331MP35S		820	25.4×60	0.15	2.20	EKMM251VSN821MQ60S
	330	25.4×25	0.15	1.25	EKMM221VSN331MQ25S		820	30×40	0.15	2.30	EKMM251VSN821MR40S
	330	35×20	0.15	1.13	EKMM221VSN331MA20S		820	35×35	0.15	2.30	EKMM251VSN821MA35S
	390	20×45	0.15	1.40	EKMM221VSN391MN45S		1,000	30×50	0.15	2.47	EKMM251VSN102MR50S
	390	22×35	0.15	1.40	EKMM221VSN391MP35S		1,000	35×40	0.15	2.47	EKMM251VSN102MA40S
	390	25.4×30	0.15	1.40	EKMM221VSN391MQ30S		1,200	30×60	0.15	2.85	EKMM251VSN122MR60S
	390	30×25	0.15	1.36	EKMM221VSN391MR25S		1,200	35×45	0.15	2.60	EKMM251VSN122MA45S
	390	35×20	0.15	1.23	EKMM221VSN391MA20S		1,500	35×50	0.15	3.00	EKMM251VSN152MA50S
	470	20×50	0.15	1.51	EKMM221VSN471MN50S		1,800	35×60	0.15	3.42	EKMM251VSN182MA60S
	470	22×40	0.15	1.51	EKMM221VSN471MP40S	315	56	20×20	0.15	0.38	EKMM3B1VSN560MN20S
	470	25.4×35	0.15	1.54	EKMM221VSN471MQ35S		68	20×25	0.15	0.47	EKMM3B1VSN680MN25S
	470	30×25	0.15	1.50	EKMM221VSN471MR25S		68	22×20	0.15	0.45	EKMM3B1VSN680MP20S
	560	22×45	0.15	1.70	EKMM221VSN561MP45S		82	20×25	0.15	0.64	EKMM3B1VSN820MN25S
	560	25.4×40	0.15	1.72	EKMM221VSN561MQ40S		82	22×20	0.15	0.47	EKMM3B1VSN820MP20S
	560	30×30	0.15	1.70	EKMM221VSN561MR30S		100	20×30	0.15	0.69	EKMM3B1VSN101MN30S
	560	35×25	0.15	1.71	EKMM221VSN561MA25S		100	22×25	0.15	0.61	EKMM3B1VSN101MP25S
	680	25.4×45	0.15	1.94	EKMM221VSN681MQ45S		100	25.4×20	0.15	0.56	EKMM3B1VSN101MQ20S
	680	30×35	0.15	1.93	EKMM221VSN681MR35S		120	20×30	0.15	0.75	EKMM3B1VSN121MN30S
	680	35×25	0.15	1.89	EKMM221VSN681MA25S		120	22×25	0.15	0.75	EKMM3B1VSN121MP25S
	820	25.4×50	0.15	2.18	EKMM221VSN821MQ50S		120	25.4×20	0.15	0.62	EKMM3B1VSN121MQ20S
	820	30×40	0.15	2.19	EKMM221VSN821MR40S		120	30×20	0.15	0.65	EKMM3B1VSN121MR20S
	820	35×30	0.15	2.16	EKMM221VSN821MA30S		150	20×35	0.15	0.82	EKMM3B1VSN151MN35S
	1,000	25.4×60	0.15	2.54	EKMM221VSN102MQ60S		150	22×30	0.15	0.82	EKMM3B1VSN151MP30S
	1,000	30×45	0.15	2.50	EKMM221VSN102MR45S		150	25.4×25	0.15	0.82	EKMM3B1VSN151MQ25S
	1,000	35×35	0.15	2.44	EKMM221VSN102MA35S		150	30×20	0.15	0.70	EKMM3B1VSN151MR20S
	1,200	30×50	0.15	2.81	EKMM221VSN122MR50S		150	35×20	0.15	0.76	EKMM3B1VSN151MA20S
	1,200	35×40	0.15	2.79	EKMM221VSN122MA40S		180	20×40	0.15	0.90	EKMM3B1VSN181MN40S
	1,500	30×60	0.15	3.30	EKMM221VSN152MR60S		180	22×35	0.15	0.92	EKMM3B1VSN181MP35S
	1,500	35×45	0.15	3.22	EKMM221VSN152MA45S		180	25.4×25	0.15	0.92	EKMM3B1VSN181MQ25S
	1,800	35×50	0.15	3.63	EKMM221VSN182MA50S		180	30×25	0.15	0.90	EKMM3B1VSN181MR25S
	2,200	35×60	0.15	4.23	EKMM221VSN222MA60S		180	35×20	0.15	0.85	EKMM3B1VSN181MA20S
250	100	20×20	0.15	0.51	EKMM251VSN101MN20S		220	20×50	0.15	1.00	EKMM3B1VSN221MN50S
	120	20×25	0.15	0.58	EKMM251VSN121MN25S		220	22×40	0.15	1.04	EKMM3B1VSN221MP40S
	120	22×20	0.15	0.60	EKMM251VSN121MP20S		220	25.4×30	0.15	1.04	EKMM3B1VSN221MQ30S
	150	20×25	0.15	0.79	EKMM251VSN151MN25S		220	30×25	0.15	1.04	EKMM3B1VSN221MR25S
	150	25.4×20	0.15	0.74	EKMM251VSN151MQ20S		220	35×20	0.15	0.90	EKMM3B1VSN221MA20S
	180	20×30	0.15	0.90	EKMM251VSN181MN30S		270	22×45	0.15	1.16	EKMM3B1VSN271MP45S
	180	22×25	0.15	0.78	EKMM251VSN181MP25S		270	25.4×35	0.15	1.16	EKMM3B1VSN271MQ35S
	180	25.4×20	0.15	0.75	EKMM251VSN181MQ20S		270	30×25	0.15	1.16	EKMM3B1VSN271MR25S
	220	20×30	0.15	1.00	EKMM251VSN221MN30S		270	35×25	0.15	1.15	EKMM3B1VSN271MA25S
	220	22×25	0.15	1.00	EKMM251VSN221MP25S		330	22×50	0.15	1.33	EKMM3B1VSN331MP50S
	220	25.4×25	0.15	0.95	EKMM251VSN221MQ25S		330	25.4×40	0.15	1.33	EKMM3B1VSN331MQ40S
	220	30×20	0.15	0.95	EKMM251VSN221MR20S		330	30×30	0.15	1.33	EKMM3B1VSN331MR30S
	270	20×35	0.15	1.10	EKMM251VSN271MN35S		330	35×25	0.15	1.33	EKMM3B1VSN331MA25S
	270	22×30	0.15	1.18	EKMM251VSN271MP30S		390	25.4×45	0.15	1.47	EKMM3B1VSN391MQ45S
	270	25.4×25	0.15	1.18	EKMM251VSN271MQ25S		390	30×35	0.15	1.47	EKMM3B1VSN391MR35S
	270	30×20	0.15	1.00	EKMM251VSN271MR20S		390	35×30	0.15	1.47	EKMM3B1VSN391MA30S
	330	20×40	0.15	1.20	EKMM251VSN331MN40S		470	25.4×50	0.15	1.70	EKMM3B1VSN471MQ50S
	330	22×35	0.15	1.30	EKMM251VSN331MP35S		470	30×40	0.15	1.70	EKMM3B1VSN471MR40S
	330	25.4×30	0.15	1.30	EKMM251VSN331MQ30S		470	35×30	0.15	1.70	EKMM3B1VSN471MA30S

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.
315	560	30×45	0.15	2.05	EKMM3B1VSN561MR45S	400	100	30×20	0.15	0.60	EKMM401VSN101MR20S
	560	35×35	0.15	2.05	EKMM3B1VSN561MA35S		120	20×40	0.15	0.75	EKMM401VSN121MN40S
	680	30×50	0.15	2.17	EKMM3B1VSN681MR50S		120	22×35	0.15	0.75	EKMM401VSN121MP35S
	680	35×40	0.15	2.17	EKMM3B1VSN681MA40S		120	25.4×25	0.15	0.75	EKMM401VSN121MQ25S
	820	35×45	0.15	2.20	EKMM3B1VSN821MA45S		120	30×25	0.15	0.73	EKMM401VSN121MR25S
	1,000	35×60	0.15	2.55	EKMM3B1VSN102MA60S		120	35×20	0.15	0.75	EKMM401VSN121MA20S
350	47	20×20	0.15	0.35	EKMM351VSN470MN20S		150	20×45	0.15	0.83	EKMM401VSN151MN45S
	56	20×25	0.15	0.43	EKMM351VSN560MN25S		150	22×40	0.15	0.88	EKMM401VSN151MP40S
	56	22×20	0.15	0.41	EKMM351VSN560MP20S		150	25.4×30	0.15	0.88	EKMM401VSN151MQ30S
	68	20×25	0.15	0.47	EKMM351VSN680MN25S		150	30×25	0.15	0.88	EKMM401VSN151MR25S
	68	25.4×20	0.15	0.46	EKMM351VSN680MQ20S		150	35×20	0.15	0.80	EKMM401VSN151MA20S
	82	20×30	0.15	0.54	EKMM351VSN820MN30S		180	22×45	0.15	0.98	EKMM401VSN181MP45S
	82	22×25	0.15	0.55	EKMM351VSN820MP25S		180	25.4×35	0.15	0.98	EKMM401VSN181MQ35S
	82	25.4×20	0.15	0.51	EKMM351VSN820MQ20S		180	30×30	0.15	0.98	EKMM401VSN181MR30S
	100	20×30	0.15	0.60	EKMM351VSN101MN30S		180	35×25	0.15	0.98	EKMM401VSN181MA25S
	100	22×25	0.15	0.69	EKMM351VSN101MP25S		220	22×50	0.15	1.10	EKMM401VSN221MP50S
	100	30×20	0.15	0.60	EKMM351VSN101MR20S		220	25.4×40	0.15	1.10	EKMM401VSN221MQ40S
	120	20×35	0.15	0.68	EKMM351VSN121MN35S		220	30×30	0.15	1.10	EKMM401VSN221MR30S
	120	22×30	0.15	0.75	EKMM351VSN121MP30S		220	35×25	0.15	1.10	EKMM401VSN221MA25S
	120	25.4×25	0.15	0.75	EKMM351VSN121MQ25S		270	25.4×45	0.15	1.22	EKMM401VSN271MQ45S
	120	30×20	0.15	0.65	EKMM351VSN121MR20S		270	30×35	0.15	1.22	EKMM401VSN271MR35S
	150	20×40	0.15	0.78	EKMM351VSN151MN40S		270	35×30	0.15	1.22	EKMM401VSN271MA30S
	150	22×35	0.15	0.82	EKMM351VSN151MP35S		330	25.4×50	0.15	1.44	EKMM401VSN331MQ50S
	150	25.4×30	0.15	0.83	EKMM351VSN151MQ30S		330	30×40	0.15	1.44	EKMM401VSN331MR40S
	150	30×25	0.15	0.82	EKMM351VSN151MR25S		330	35×30	0.15	1.44	EKMM401VSN331MA30S
	150	35×20	0.15	0.76	EKMM351VSN151MA20S		390	25.4×60	0.15	1.51	EKMM401VSN391MQ60S
	180	20×45	0.15	0.87	EKMM351VSN181MN45S		390	30×45	0.15	1.60	EKMM401VSN391MR45S
	180	22×40	0.15	0.92	EKMM351VSN181MP40S		390	35×35	0.15	1.60	EKMM401VSN391MA35S
	180	25.4×30	0.15	0.92	EKMM351VSN181MQ30S		470	30×50	0.15	1.90	EKMM401VSN471MR50S
	180	30×25	0.15	0.90	EKMM351VSN181MR25S		470	35×40	0.15	1.90	EKMM401VSN471MA40S
	220	20×50	0.15	1.00	EKMM351VSN221MN50S	420	560	30×60	0.15	2.10	EKMM401VSN561MR60S
	220	22×45	0.15	1.05	EKMM351VSN221MP45S		560	35×45	0.15	2.12	EKMM401VSN561MA45S
	220	25.4×35	0.15	1.04	EKMM351VSN221MQ35S		680	35×60	0.15	2.27	EKMM401VSN681MA60S
	220	30×30	0.15	1.02	EKMM351VSN221MR30S		39	20×20	0.20	0.32	EKMM421VSN390MN20S
	220	35×25	0.15	1.04	EKMM351VSN221MA25S		47	20×25	0.20	0.39	EKMM421VSN470MN25S
	270	22×50	0.15	1.16	EKMM351VSN271MP50S		47	22×20	0.20	0.37	EKMM421VSN470MP20S
	270	25.4×40	0.15	1.18	EKMM351VSN271MQ40S		56	20×25	0.20	0.51	EKMM421VSN560MN25S
	270	30×30	0.15	1.17	EKMM351VSN271MR30S		56	25.4×20	0.20	0.42	EKMM421VSN560MQ20S
	270	35×25	0.15	1.20	EKMM351VSN271MA25S		68	20×30	0.20	0.56	EKMM421VSN680MN30S
	330	25.4×45	0.15	1.29	EKMM351VSN331MQ45S		68	22×25	0.20	0.50	EKMM421VSN680MP25S
	330	30×35	0.15	1.34	EKMM351VSN331MR35S		68	25.4×20	0.20	0.46	EKMM421VSN680MQ20S
	330	35×30	0.15	1.22	EKMM351VSN331MA30S		82	20×35	0.20	0.64	EKMM421VSN820MN35S
	390	25.4×50	0.15	1.51	EKMM351VSN391MQ50S		82	22×25	0.20	0.64	EKMM421VSN820MP25S
	390	30×40	0.15	1.51	EKMM351VSN391MR40S		82	25.4×25	0.20	0.58	EKMM421VSN820MQ25S
	390	35×35	0.15	1.47	EKMM351VSN391MA35S		82	30×20	0.20	0.53	EKMM421VSN820MR20S
	470	25.4×60	0.15	1.66	EKMM351VSN471MQ60S		100	20×35	0.20	0.70	EKMM421VSN101MN35S
	470	30×45	0.15	1.65	EKMM351VSN471MR45S		100	22×30	0.20	0.70	EKMM421VSN101MP30S
	470	35×35	0.15	1.69	EKMM351VSN471MA35S		100	25.4×25	0.20	0.70	EKMM421VSN101MQ25S
	560	30×50	0.15	1.85	EKMM351VSN561MR50S		100	30×20	0.20	0.59	EKMM421VSN101MR20S
	560	35×40	0.15	1.90	EKMM351VSN561MA40S		120	20×40	0.20	0.75	EKMM421VSN121MN40S
	680	30×60	0.15	2.15	EKMM351VSN681MR60S		120	22×35	0.20	0.75	EKMM421VSN121MP35S
	680	35×50	0.15	1.99	EKMM351VSN681MA50S		120	25.4×30	0.20	0.75	EKMM421VSN121MQ30S
	820	35×60	0.15	2.31	EKMM351VSN821MA60S		120	30×25	0.20	0.73	EKMM421VSN121MR25S
400	39	20×20	0.15	0.32	EKMM401VSN390MN20S		120	35×20	0.20	0.67	EKMM421VSN121MA20S
	47	20×25	0.15	0.39	EKMM401VSN470MN25S		150	20×50	0.20	0.88	EKMM421VSN151MN50S
	47	22×20	0.15	0.37	EKMM401VSN470MP20S		150	22×40	0.20	0.88	EKMM421VSN151MP40S
	56	20×25	0.15	0.51	EKMM401VSN560MN25S		150	25.4×35	0.20	0.88	EKMM421VSN151MQ35S
	56	25.4×20	0.15	0.42	EKMM401VSN560MQ20S		150	30×25	0.20	0.88	EKMM421VSN151MR25S
	68	20×30	0.15	0.56	EKMM401VSN680MN30S		180	22×45	0.20	0.95	EKMM421VSN181MP45S
	68	22×25	0.15	0.50	EKMM401VSN680MP25S		180	25.4×35	0.20	0.95	EKMM421VSN181MQ35S
	68	25.4×20	0.15	0.46	EKMM401VSN680MQ20S		180	30×30	0.20	0.95	EKMM421VSN181MR30S
	82	20×30	0.15	0.64	EKMM401VSN820MN30S		180	35×25	0.20	0.94	EKMM421VSN181MA25S
	82	22×25	0.15	0.64	EKMM401VSN820MP25S		220	22×50	0.20	1.10	EKMM421VSN221MP50S
	82	30×20	0.15	0.55	EKMM401VSN820MR20S		220	25.4×45	0.20	1.10	EKMM421VSN221MQ45S
	100	20×35	0.15	0.70	EKMM401VSN101MN35S		220	30×35	0.20	1.10	EKMM421VSN221MR35S
	100	22×30	0.15	0.70	EKMM401VSN101MP30S		220	35×25	0.20	1.10	EKMM421VSN221MA25S
	100	25.4×25	0.15	0.70	EKMM401VSN101MQ25S		270	25.4×50	0.20	1.22	EKMM421VSN271MQ50S

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.
420	270	30×40	0.20	1.22	EKMM421VSN271MR40S	450	120	20×50	0.20	0.75	EKMM451VSN121MN50S
	270	35×30	0.20	1.22	EKMM421VSN271MA30S		120	22×40	0.20	0.80	EKMM451VSN121MP40S
	330	25.4×60	0.20	1.41	EKMM421VSN331MQ60S		120	25.4×30	0.20	0.80	EKMM451VSN121MQ30S
	330	30×45	0.20	1.45	EKMM421VSN331MR45S		120	30×25	0.20	0.80	EKMM451VSN121MR25S
	330	35×35	0.20	1.45	EKMM421VSN331MA35S		120	35×25	0.20	0.73	EKMM451VSN121MA25S
	390	30×50	0.20	1.55	EKMM421VSN391MR50S		150	22×45	0.20	0.88	EKMM451VSN151MP45S
	390	35×40	0.20	1.55	EKMM421VSN391MA40S		150	25.4×35	0.20	0.88	EKMM451VSN151MQ35S
	470	30×60	0.20	1.79	EKMM421VSN471MR60S		150	30×30	0.20	0.88	EKMM451VSN151MR30S
	470	35×45	0.20	1.90	EKMM421VSN471MA45S		150	35×25	0.20	0.75	EKMM451VSN151MA25S
	560	35×50	0.20	2.15	EKMM421VSN561MA50S		180	22×50	0.20	1.00	EKMM451VSN181MP50S
450	680	35×60	0.20	2.27	EKMM421VSN681MA60S		180	25.4×40	0.20	1.00	EKMM451VSN181MQ40S
	39	20×25	0.20	0.34	EKMM451VSN390MN25S		180	30×30	0.20	1.00	EKMM451VSN181MR30S
	47	20×25	0.20	0.39	EKMM451VSN470MN25S		220	25.4×45	0.20	1.12	EKMM451VSN221MQ45S
	56	20×30	0.20	0.51	EKMM451VSN560MN30S		220	30×35	0.20	1.12	EKMM451VSN221MR35S
	56	22×25	0.20	0.40	EKMM451VSN560MP25S		220	35×30	0.20	1.12	EKMM451VSN221MA30S
	68	20×35	0.20	0.56	EKMM451VSN680MN35S		270	25.4×60	0.20	1.18	EKMM451VSN271MQ60S
	68	22×30	0.20	0.53	EKMM451VSN680MP30S		270	30×40	0.20	1.28	EKMM451VSN271MR40S
	68	25.4×25	0.20	0.50	EKMM451VSN680MQ25S		270	35×35	0.20	1.28	EKMM451VSN271MA35S
	82	20×35	0.20	0.64	EKMM451VSN820MN35S		330	30×50	0.20	1.45	EKMM451VSN331MR50S
	82	22×30	0.20	0.64	EKMM451VSN820MP30S		330	35×40	0.20	1.45	EKMM451VSN331MA40S
	82	25.4×25	0.20	0.64	EKMM451VSN820MQ25S		390	30×60	0.20	1.51	EKMM451VSN391MR60S
	100	20×45	0.20	0.69	EKMM451VSN101MN45S		390	35×40	0.20	1.55	EKMM451VSN391MA40S
	100	22×35	0.20	0.69	EKMM451VSN101MP35S		470	35×50	0.20	1.85	EKMM451VSN471MA50S
	100	25.4×30	0.20	0.69	EKMM451VSN101MQ30S		560	35×60	0.20	1.91	EKMM451VSN561MA60S
	100	30×25	0.20	0.64	EKMM451VSN101MR25S						

◆RATED RIPPLE CURRENT MULTIPLIERS


●Frequency Multipliers

Frequency (Hz)	50	120	300	1k	10k	50k
160 to 250V _{dc}	0.81	1.00	1.17	1.32	1.45	1.50
315 to 450V _{dc}	0.77	1.00	1.16	1.30	1.41	1.43

The endurance of capacitors is shorted with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

SMH Series

- Endurance with ripple current : 2,000 hours at 85°C
- Non solvent-proof type
- RoHS Compliant




◆SPECIFICATIONS

Items	Characteristics										
Category	-40 to +85℃										
Temperature Range											
Rated Voltage Range	6.3 to 100V _{dc}										
Capacitance Tolerance	±20% (M) (at 20℃, 120Hz)										
Leakage Current	I=0.02CV or 3mA, whichever is smaller. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20℃ after 5 minutes)										
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	80V	100V	(at 20℃, 120Hz)
	tanδ (Max.)	0.60	0.50	0.40	0.30	0.25	0.20	0.15	0.15	0.15	
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	80V	100V	(at 120Hz)
	Z(-25℃)/Z(+20℃)	4	4	4	3	3	2	2	2	2	
	Z(-40℃)/Z(+20℃)	15	15	15	10	8	6	6	5	5	
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20℃ after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 85℃.										
	Capacitance change	≤±20% of the initial value									
	D.F. (tanδ)	≤200% of the initial specified value									
	Leakage current	≤The initial specified value									
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for 1,000 hours at 85℃ without voltage applied.										
	Capacitance change	≤±20% of the initial value									
	D.F. (tanδ)	≤150% of the initial specified value									
	Leakage current	≤The initial specified value									

◆DIMENSIONS [mm]


- Terminal Code : VS (φ22 to φ35) : Standard

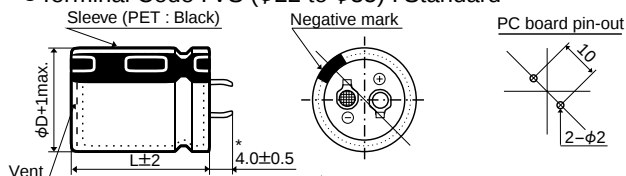


*φD=35mm : 3.5±0.5mm

No plastic disk is the standard design

- Terminal Code : LI (φ35)

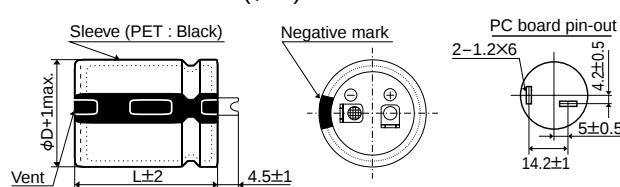

◆PART NUMBERING SYSTEM

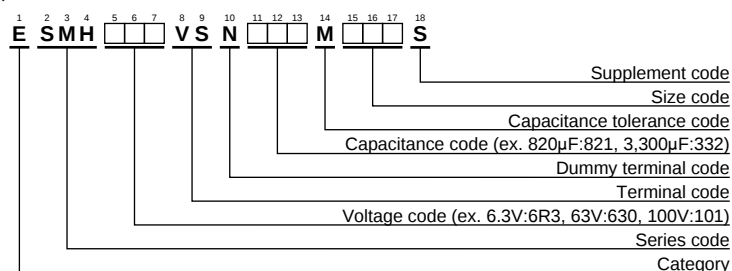

Please refer to "A guide to global code (snap-in type)"

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size ϕD×L(mm)	tanδ	Rated ripple current (Arms/85°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size ϕD×L(mm)	tanδ	Rated ripple current (Arms/85°C,120Hz)	Part No.
6.3	15,000	22×25	0.60	2.44	ESMH6R3VSN153MP25S	16	27,000	25.4×45	0.40	4.72	ESMH160VSN273MQ45S
	18,000	22×30	0.60	2.67	ESMH6R3VSN183MP30S		27,000	30×35	0.40	4.82	ESMH160VSN273MR35S
	18,000	25.4×25	0.60	2.70	ESMH6R3VSN183MQ25S		27,000	35×30	0.40	4.65	ESMH160VSN273MA30S
	22,000	22×30	0.60	3.06	ESMH6R3VSN223MP30S		33,000	25.4×50	0.40	5.33	ESMH160VSN333MQ50S
	22,000	25.4×25	0.60	3.07	ESMH6R3VSN223MQ25S		33,000	30×40	0.40	5.36	ESMH160VSN333MR40S
	27,000	22×35	0.60	3.49	ESMH6R3VSN273MP35S		33,000	35×30	0.40	5.15	ESMH160VSN333MA30S
	27,000	25.4×30	0.60	3.52	ESMH6R3VSN273MQ30S		39,000	30×45	0.40	6.01	ESMH160VSN393MR45S
	27,000	30×25	0.60	3.57	ESMH6R3VSN273MR25S		39,000	35×35	0.40	5.95	ESMH160VSN393MA35S
	33,000	22×40	0.60	3.97	ESMH6R3VSN333MP40S		47,000	30×50	0.40	6.79	ESMH160VSN473MR50S
	33,000	25.4×35	0.60	4.02	ESMH6R3VSN333MQ35S		47,000	35×40	0.40	6.76	ESMH160VSN473MA40S
	33,000	30×25	0.60	3.95	ESMH6R3VSN333MR25S		56,000	35×45	0.40	7.62	ESMH160VSN563MA45S
	39,000	22×50	0.60	4.55	ESMH6R3VSN393MP50S		68,000	35×50	0.40	8.63	ESMH160VSN683MA50S
	39,000	25.4×40	0.60	4.50	ESMH6R3VSN393MQ40S	25	5,600	22×25	0.30	2.21	ESMH250VSN562MP25S
	39,000	30×30	0.60	4.45	ESMH6R3VSN393MR30S		6,800	22×30	0.30	2.40	ESMH250VSN682MP30S
	39,000	35×25	0.60	4.51	ESMH6R3VSN393MA25S		6,800	25.4×25	0.30	2.56	ESMH250VSN682MQ25S
	47,000	25.4×45	0.60	5.09	ESMH6R3VSN473MQ45S		8,200	22×35	0.30	2.72	ESMH250VSN822MP35S
	47,000	30×35	0.60	5.06	ESMH6R3VSN473MR35S		8,200	25.4×25	0.30	2.80	ESMH250VSN822MQ25S
	47,000	35×30	0.60	5.01	ESMH6R3VSN473MA30S		10,000	22×40	0.30	3.09	ESMH250VSN103MP40S
	56,000	25.4×50	0.60	5.71	ESMH6R3VSN563MQ50S		10,000	25.4×30	0.30	3.12	ESMH250VSN103MQ30S
	56,000	30×40	0.60	5.70	ESMH6R3VSN563MR40S		10,000	30×25	0.30	3.21	ESMH250VSN103MR25S
	56,000	35×30	0.60	5.77	ESMH6R3VSN563MA30S		12,000	22×45	0.30	3.48	ESMH250VSN123MP45S
	68,000	30×45	0.60	6.48	ESMH6R3VSN683MR45S		12,000	25.4×35	0.30	3.43	ESMH250VSN123MQ35S
	68,000	35×35	0.60	6.42	ESMH6R3VSN683MA35S		12,000	30×30	0.30	3.86	ESMH250VSN123MR30S
	82,000	30×50	0.60	7.32	ESMH6R3VSN823MR50S		12,000	35×25	0.30	3.54	ESMH250VSN123MA25S
	82,000	35×40	0.60	7.29	ESMH6R3VSN823MA40S		15,000	22×50	0.30	4.00	ESMH250VSN153MP50S
	100,000	35×45	0.60	8.31	ESMH6R3VSN104MA45S		15,000	25.4×40	0.30	3.95	ESMH250VSN153MQ40S
	12,000	22×25	0.50	2.39	ESMH100VSN123MP25S		15,000	30×30	0.30	4.00	ESMH250VSN153MR30S
	15,000	22×30	0.50	2.76	ESMH100VSN153MP30S		15,000	35×25	0.30	3.95	ESMH250VSN153MA25S
	15,000	25.4×25	0.50	2.77	ESMH100VSN153MQ25S		18,000	25.4×45	0.30	4.45	ESMH250VSN183MQ45S
	18,000	22×35	0.50	3.12	ESMH100VSN183MP35S		18,000	30×35	0.30	4.46	ESMH250VSN183MR35S
	18,000	25.4×25	0.50	3.04	ESMH100VSN183MQ25S		18,000	35×30	0.30	4.63	ESMH250VSN183MA30S
	22,000	22×40	0.50	3.55	ESMH100VSN223MP40S		22,000	25.4×50	0.30	5.02	ESMH250VSN223MQ50S
	22,000	25.4×30	0.50	3.48	ESMH100VSN223MQ30S		22,000	30×45	0.30	5.21	ESMH250VSN223MR45S
	22,000	30×25	0.50	3.53	ESMH100VSN223MR25S		22,000	35×35	0.30	5.16	ESMH250VSN223MA35S
	27,000	22×45	0.50	4.04	ESMH100VSN273MP45S		27,000	30×50	0.30	5.94	ESMH250VSN273MR50S
	27,000	25.4×35	0.50	3.98	ESMH100VSN273MQ35S		27,000	35×40	0.30	5.92	ESMH250VSN273MA40S
	27,000	30×30	0.50	3.73	ESMH100VSN273MR30S		33,000	35×45	0.30	6.75	ESMH250VSN333MA45S
	27,000	35×25	0.50	3.73	ESMH100VSN273MA25S		39,000	35×50	0.30	7.56	ESMH250VSN393MA50S
10	33,000	22×50	0.50	4.58	ESMH100VSN333MP50S	35	3,900	22×25	0.25	2.22	ESMH350VSN392MP25S
	33,000	25.4×40	0.50	4.54	ESMH100VSN333MQ40S		4,700	22×30	0.25	2.41	ESMH350VSN472MP30S
	33,000	30×30	0.50	4.13	ESMH100VSN333MR30S		4,700	25.4×25	0.25	2.42	ESMH350VSN472MQ25S
	33,000	35×25	0.50	4.13	ESMH100VSN333MA25S		5,600	22×35	0.25	2.75	ESMH350VSN562MP35S
	39,000	25.4×45	0.50	5.08	ESMH100VSN393MQ45S		5,600	25.4×25	0.25	2.64	ESMH350VSN562MQ25S
	39,000	30×35	0.50	5.05	ESMH100VSN393MR35S		6,800	22×40	0.25	2.80	ESMH350VSN682MP40S
	39,000	35×30	0.50	4.80	ESMH100VSN393MA35S		6,800	25.4×30	0.25	2.74	ESMH350VSN682MR30S
	47,000	25.4×50	0.50	5.73	ESMH100VSN473MQ50S		6,800	30×25	0.25	2.97	ESMH350VSN682MR25S
	47,000	30×40	0.50	5.72	ESMH100VSN473MR40S		8,200	22×45	0.25	3.47	ESMH350VSN822MP45S
	47,000	35×30	0.50	5.27	ESMH100VSN473MA30S		8,200	25.4×35	0.25	3.10	ESMH350VSN822MQ35S
	56,000	30×45	0.50	6.44	ESMH100VSN563MR45S		8,200	30×30	0.25	3.13	ESMH350VSN822MR30S
	56,000	35×35	0.50	6.38	ESMH100VSN563MA35S		8,200	35×25	0.25	2.73	ESMH350VSN822MA25S
	68,000	30×50	0.50	7.27	ESMH100VSN683MR50S		10,000	22×50	0.25	3.57	ESMH350VSN103MP50S
	68,000	35×40	0.50	7.27	ESMH100VSN683MA40S		10,000	25.4×40	0.25	3.53	ESMH350VSN103MQ40S
	82,000	35×50	0.50	8.49	ESMH100VSN823MA50S		10,000	30×30	0.25	3.46	ESMH350VSN103MR30S
	8,200	22×25	0.40	2.51	ESMH160VSN822MP25S		10,000	35×25	0.25	3.02	ESMH350VSN103MA25S
	10,000	22×25	0.40	2.77	ESMH160VSN103MP25S		12,000	25.4×45	0.25	3.98	ESMH350VSN123MQ45S
	12,000	22×30	0.40	2.86	ESMH160VSN123MP30S		12,000	30×35	0.25	4.01	ESMH350VSN123MR35S
	12,000	25.4×25	0.40	2.95	ESMH160VSN123MQ25S		12,000	35×30	0.25	4.42	ESMH350VSN123MA30S
16	15,000	22×35	0.40	3.29	ESMH160VSN153MP35S		15,000	25.4×50	0.25	4.54	ESMH350VSN153MQ50S
	15,000	25.4×30	0.40	3.46	ESMH160VSN153MQ30S		15,000	30×40	0.25	4.52	ESMH350VSN153MR40S
	15,000	30×25	0.40	3.66	ESMH160VSN153MR25S		15,000	35×35	0.25	5.01	ESMH350VSN153MA35S
	18,000	22×40	0.40	3.72	ESMH160VSN183MP40S	50	18,000	30×45	0.25	4.71	ESMH350VSN183MR45S
	18,000	25.4×35	0.40	3.98	ESMH160VSN183MQ35S		18,000	35×40	0.25	5.54	ESMH350VSN183MA40S
	18,000	30×25	0.40	4.00	ESMH160VSN183MR25S		22,000	30×50	0.25	5.33	ESMH350VSN223MR50S
	22,000	22×50	0.40	4.37	ESMH160VSN223MP50S		22,000	35×45	0.25	6.04	ESMH350VSN223MA45S
	22,000	25.4×40	0.40	4.26	ESMH160VSN223MQ40S		27,000	35×50	0.25	6.89	ESMH350VSN273MA50S
	22,000	30×30	0.40	4.21	ESMH160VSN223MR30S		2,200	22×25	0.20	1.91	ESMH500VSN222MP25S
	22,000	35×25	0.40	4.15	ESMH160VSN223MA25S		3,300	22×30	0.20	2.37	ESMH500VSN332MP30S

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/ 85°C, 120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/ 85°C, 120Hz)	Part No.
50	3,300	25.4 × 25	0.20	2.38	ESMH500VSN332MQ25S	80	1,200	22 × 25	0.15	1.69	ESMH800VSN122MP25S
	3,900	22 × 35	0.20	2.65	ESMH500VSN392MP35S		1,500	22 × 25	0.15	1.88	ESMH800VSN152MP25S
	3,900	25.4 × 30	0.20	2.68	ESMH500VSN392MQ30S		1,800	22 × 30	0.15	2.14	ESMH800VSN182MP30S
	3,900	30 × 25	0.20	2.55	ESMH500VSN392MR25S		1,800	25.4 × 25	0.15	2.26	ESMH800VSN182MQ25S
	4,700	22 × 40	0.20	2.99	ESMH500VSN472MP40S		2,200	22 × 35	0.15	2.44	ESMH800VSN222MP35S
	4,700	25.4 × 35	0.20	3.03	ESMH500VSN472MQ35S		2,200	25.4 × 30	0.15	2.46	ESMH800VSN222MQ30S
	4,700	30 × 25	0.20	2.81	ESMH500VSN472MR25S		2,200	30 × 25	0.15	2.49	ESMH800VSN222MR25S
	5,600	22 × 45	0.20	3.36	ESMH500VSN562MP45S		2,700	22 × 40	0.15	2.78	ESMH800VSN272MP40S
	5,600	25.4 × 35	0.20	3.31	ESMH500VSN562MQ35S		2,700	25.4 × 35	0.15	2.81	ESMH800VSN272MQ35S
	5,600	30 × 30	0.20	3.37	ESMH500VSN562MR30S		2,700	30 × 25	0.15	2.75	ESMH800VSN272MR30S
	5,600	35 × 25	0.20	3.42	ESMH500VSN562MA25S		3,300	22 × 45	0.15	3.16	ESMH800VSN332MP45S
	6,800	22 × 50	0.20	3.81	ESMH500VSN682MP50S		3,300	25.4 × 40	0.15	3.21	ESMH800VSN332MQ40S
	6,800	25.4 × 40	0.20	3.81	ESMH500VSN682MQ40S		3,300	30 × 30	0.15	3.17	ESMH800VSN332MR30S
	6,800	30 × 35	0.20	3.85	ESMH500VSN682MR35S		3,300	35 × 25	0.15	3.21	ESMH800VSN332MA25S
	6,800	35 × 30	0.20	3.85	ESMH500VSN682MA30S		3,900	22 × 50	0.15	3.52	ESMH800VSN392MP50S
	8,200	25.4 × 50	0.20	4.37	ESMH500VSN822MQ50S		3,900	25.4 × 45	0.15	3.59	ESMH800VSN392MQ45S
	8,200	30 × 40	0.20	4.36	ESMH500VSN822MR40S		3,900	30 × 35	0.15	3.57	ESMH800VSN392MR35S
	8,200	35 × 30	0.20	4.41	ESMH500VSN822MA30S		3,900	35 × 25	0.15	3.50	ESMH800VSN392MA25S
	10,000	30 × 45	0.20	4.97	ESMH500VSN103MR45S		4,700	25.4 × 50	0.15	4.05	ESMH800VSN472MQ50S
	10,000	35 × 35	0.20	4.92	ESMH500VSN103MA35S		4,700	30 × 40	0.15	4.05	ESMH800VSN472MR40S
63	12,000	30 × 50	0.20	5.60	ESMH500VSN123MR50S	100	4,700	35 × 30	0.15	4.09	ESMH800VSN472MA30S
	12,000	35 × 40	0.20	5.58	ESMH500VSN123MA40S		5,600	30 × 45	0.15	4.55	ESMH800VSN562MR45S
	15,000	35 × 45	0.20	6.44	ESMH500VSN153MA45S		5,600	35 × 35	0.15	4.51	ESMH800VSN562MA35S
	18,000	35 × 50	0.20	6.71	ESMH500VSN183MA50S		6,800	30 × 50	0.15	5.16	ESMH800VSN682MR50S
	1,800	22 × 25	0.15	1.82	ESMH630VSN182MP25S		6,800	35 × 40	0.15	5.14	ESMH800VSN682MA40S
	2,200	22 × 30	0.15	2.31	ESMH630VSN222MP30S		8,200	35 × 45	0.15	5.83	ESMH800VSN822MA45S
	2,200	25.4 × 25	0.15	2.30	ESMH630VSN222MQ25S		10,000	35 × 50	0.15	6.63	ESMH800VSN103MA50S
	2,700	22 × 35	0.15	2.40	ESMH630VSN272MP35S		820	22 × 25	0.15	1.86	ESMH101VSN821MP25S
	2,700	25.4 × 25	0.15	2.40	ESMH630VSN272MQ25S		1,200	22 × 30	0.15	2.09	ESMH101VSN122MP30S
	3,300	22 × 35	0.15	2.62	ESMH630VSN332MP35S		1,200	25.4 × 25	0.15	2.10	ESMH101VSN122MQ25S
	3,300	25.4 × 30	0.15	2.64	ESMH630VSN332MQ30S		1,500	22 × 35	0.15	2.41	ESMH101VSN152MP35S
	3,300	30 × 25	0.15	2.78	ESMH630VSN332MR25S		1,500	25.4 × 30	0.15	2.43	ESMH101VSN152MQ30S
	3,900	22 × 40	0.15	2.93	ESMH630VSN392MP40S		1,500	30 × 25	0.15	2.46	ESMH101VSN152MR25S
	3,900	25.4 × 35	0.15	2.97	ESMH630VSN392MQ35S		1,800	22 × 40	0.15	2.71	ESMH101VSN182MP40S
	3,900	30 × 30	0.15	3.00	ESMH630VSN392MR30S		1,800	25.4 × 35	0.15	2.75	ESMH101VSN182MQ35S
	3,900	35 × 25	0.15	3.00	ESMH630VSN392MA25S		1,800	30 × 25	0.15	2.72	ESMH101VSN182MR25S
	4,700	22 × 50	0.15	3.39	ESMH630VSN472MP50S		2,200	22 × 45	0.15	3.08	ESMH101VSN222MP45S
	4,700	25.4 × 40	0.15	3.36	ESMH630VSN472MQ40S		2,200	25.4 × 40	0.15	3.13	ESMH101VSN222MQ40S
	4,700	30 × 30	0.15	3.32	ESMH630VSN472MR30S		2,200	30 × 30	0.15	3.09	ESMH101VSN222MR30S
	4,700	35 × 25	0.15	3.36	ESMH630VSN472MA25S		2,200	35 × 25	0.15	3.14	ESMH101VSN222MA25S
63	5,600	25.4 × 45	0.15	3.77	ESMH630VSN562MQ45S		2,700	22 × 50	0.15	3.53	ESMH101VSN272MP50S
	5,600	30 × 35	0.15	3.75	ESMH630VSN562MR35S		2,700	25.4 × 45	0.15	3.57	ESMH101VSN272MQ45S
	5,600	35 × 30	0.15	3.76	ESMH630VSN562MA30S		2,700	30 × 35	0.15	3.55	ESMH101VSN272MR35S
	6,800	25.4 × 50	0.15	4.27	ESMH630VSN682MQ50S		2,700	35 × 30	0.15	3.71	ESMH101VSN272MA30S
	6,800	30 × 40	0.15	4.27	ESMH630VSN682MR40S		3,300	25.4 × 50	0.15	4.06	ESMH101VSN332MQ50S
	6,800	35 × 30	0.15	4.15	ESMH630VSN682MA30S		3,300	30 × 40	0.15	4.05	ESMH101VSN332MR40S
	8,200	30 × 45	0.15	4.83	ESMH630VSN822MR45S		3,300	35 × 30	0.15	4.05	ESMH101VSN332MA30S
	8,200	35 × 35	0.15	4.79	ESMH630VSN822MA35S		3,900	30 × 45	0.15	4.54	ESMH101VSN392MR45S
	10,000	30 × 50	0.15	5.49	ESMH630VSN103MR50S		3,900	35 × 35	0.15	4.49	ESMH101VSN392MA35S
	10,000	35 × 40	0.15	5.47	ESMH630VSN103MA40S		4,700	30 × 50	0.15	5.13	ESMH101VSN472MR50S
	12,000	35 × 45	0.15	6.19	ESMH630VSN123MA45S		4,700	35 × 40	0.15	5.11	ESMH101VSN472MA40S
							5,600	35 × 45	0.15	5.75	ESMH101VSN562MA45S
							6,800	35 × 50	0.15	6.50	ESMH101VSN682MA50S

◆RATED RIPPLE CURRENT MULTIPLIERS


●Frequency Multipliers

Frequency (Hz)	50	120	300	1k	10k	50k
6.3 to 50V _{dc}	0.95	1.00	1.03	1.05	1.08	1.08
63 to 100V _{dc}	0.92	1.00	1.07	1.13	1.19	1.20

The endurance of capacitors is shorted with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

KMH Series

- Endurance with ripple current : 2,000 hours at 105°C
- Non solvent-proof type
- RoHS Compliant




SPECIFICATIONS

Items	Characteristics										
Category	Temperature Range										
Temperature Range	-40 to +105°C										
Rated Voltage Range	6.3 to 100V _{dc}										
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)										
Leakage Current	I=0.02CV or 3mA, whichever is smaller Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 5 minutes)										
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	80V	100V	(at 20°C, 120Hz)
	tanδ (Max.)	0.60	0.50	0.40	0.30	0.25	0.20	0.15	0.15	0.15	
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	80V	100V	(at 120Hz)
	Z(-25°C)/Z(+20°C)	4	4	4	3	3	2	2	2	2	
	Z(-40°C)/Z(+20°C)	15	15	15	10	8	6	6	5	5	
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 105°C.										
	Capacitance change	≤±20% of the initial value									
	D.F. (tanδ)	≤200% of the initial specified value									
	Leakage current	≤The initial specified value									
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.										
	Capacitance change	≤±20% of the initial value									
	D.F. (tanδ)	≤150% of the initial specified value									
	Leakage current	≤The initial specified value									

DIMENSIONS [mm]


- Terminal Code : VS (φ22 to φ35) : Standard

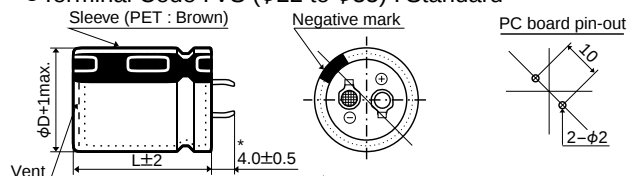


*φD=35mm : 3.5±0.5mm

No plastic disk is the standard design

- Terminal Code : LI (φ35)

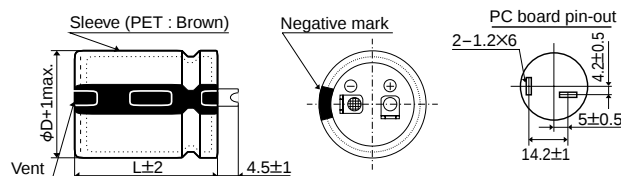

PART NUMBERING SYSTEM

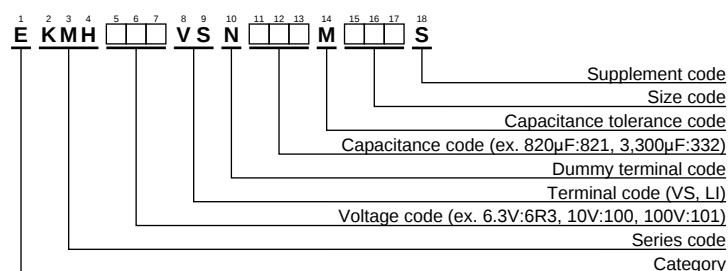

Please refer to "A guide to global code (snap-in type)"

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/ 105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/ 105°C,120Hz)	Part No.	
6.3	12,000	22×25	0.60	1.54	EKMH6R3VSN123MP25S	16	27,000	35×30	0.40	3.45	EKMH160VSN273MA30S	
	15,000	22×25	0.60	1.72	EKMH6R3VSN153MP25S		33,000	30×45	0.40	4.30	EKMH160VSN333MR45S	
	18,000	22×30	0.60	1.95	EKMH6R3VSN183MP30S		33,000	35×35	0.40	4.26	EKMH160VSN333MA35S	
	18,000	25.4×25	0.60	1.96	EKMH6R3VSN183MQ25S		39,000	30×50	0.40	4.81	EKMH160VSN393MR50S	
	22,000	22×35	0.60	2.23	EKMH6R3VSN223MP35S		39,000	35×40	0.40	4.79	EKMH160VSN393MA40S	
	22,000	25.4×30	0.60	2.25	EKMH6R3VSN223MQ30S		47,000	35×45	0.40	5.43	EKMH160VSN473MA45S	
	22,000	30×25	0.60	2.28	EKMH6R3VSN223MR25S		25	4,700	22×25	0.30	1.50	EKMH250VSN472MP25S
	27,000	22×40	0.60	2.54	EKMH6R3VSN273MP40S			5,600	22×25	0.30	1.63	EKMH250VSN562MP25S
	27,000	25.4×35	0.60	2.57	EKMH6R3VSN273MQ35S			6,800	22×30	0.30	1.86	EKMH250VSN682MP30S
	27,000	30×25	0.60	2.52	EKMH6R3VSN273MR25S			6,800	25.4×25	0.30	1.87	EKMH250VSN682MQ25S
	33,000	22×45	0.60	2.88	EKMH6R3VSN333MP45S	8,200		22×35	0.30	2.11	EKMH250VSN822MP35S	
	33,000	25.4×40	0.60	2.93	EKMH6R3VSN333MQ40S	8,200		25.4×30	0.30	2.12	EKMH250VSN822MQ30S	
	33,000	30×30	0.60	2.89	EKMH6R3VSN333MR30S	8,200		30×25	0.30	2.15	EKMH250VSN822MR25S	
	33,000	35×25	0.60	2.93	EKMH6R3VSN333MA25S	10,000		22×40	0.30	2.39	EKMH250VSN103MP40S	
	39,000	25.4×40	0.60	3.18	EKMH6R3VSN393MQ40S	10,000		25.4×35	0.30	2.42	EKMH250VSN103MQ35S	
	39,000	30×35	0.60	3.26	EKMH6R3VSN393MR35S	10,000		30×25	0.30	2.37	EKMH250VSN103MR25S	
	39,000	35×30	0.60	3.40	EKMH6R3VSN393MA30S	12,000		22×45	0.30	2.69	EKMH250VSN123MP45S	
	47,000	25.4×50	0.60	3.69	EKMH6R3VSN473MQ50S	12,000		25.4×40	0.30	2.74	EKMH250VSN123MQ40S	
	47,000	30×40	0.60	3.69	EKMH6R3VSN473MR40S	12,000		30×30	0.30	2.70	EKMH250VSN123MR30S	
	47,000	35×30	0.60	3.73	EKMH6R3VSN473MA30S	12,000		35×25	0.30	2.74	EKMH250VSN123MA25S	
	56,000	30×45	0.60	4.16	EKMH6R3VSN563MR45S	15,000		25.4×45	0.30	3.15	EKMH250VSN153MQ45S	
	56,000	35×35	0.60	4.12	EKMH6R3VSN563MA35S	15,000		30×35	0.30	3.13	EKMH250VSN153MR35S	
	68,000	30×50	0.60	4.71	EKMH6R3VSN683MR50S	15,000		35×30	0.30	3.27	EKMH250VSN153MA30S	
	68,000	35×40	0.60	4.69	EKMH6R3VSN683MA40S	18,000		25.4×50	0.30	3.54	EKMH250VSN183MQ50S	
	82,000	35×45	0.60	5.32	EKMH6R3VSN823MA45S	18,000		30×40	0.30	3.54	EKMH250VSN183MR40S	
10	10,000	22×25	0.50	1.55	EKMH100VSN103MP25S	18,000		35×30	0.30	3.58	EKMH250VSN183MA30S	
	12,000	22×30	0.50	1.77	EKMH100VSN123MP30S	22,000	30×45	0.30	4.04	EKMH250VSN223MR45S		
	15,000	22×30	0.50	1.97	EKMH100VSN153MP30S	22,000	35×35	0.30	3.64	EKMH250VSN223MA35S		
	15,000	25.4×25	0.50	1.96	EKMH100VSN153MQ25S	27,000	35×45	0.30	4.73	EKMH250VSN273MA45S		
	18,000	22×35	0.50	2.21	EKMH100VSN183MP35S	33,000	35×50	0.30	5.39	EKMH250VSN333MA50S		
	18,000	25.4×30	0.50	2.23	EKMH100VSN183MQ30S	35	3,300	22×25	0.25	1.40	EKMH350VSN332MP25S	
	22,000	22×40	0.50	2.51	EKMH100VSN223MP40S		3,900	22×30	0.25	1.57	EKMH350VSN392MP30S	
	22,000	25.4×35	0.50	2.54	EKMH100VSN223MQ35S		4,700	22×30	0.25	1.72	EKMH350VSN472MP30S	
	22,000	30×25	0.50	2.40	EKMH100VSN223MR25S		4,700	25.4×25	0.25	1.80	EKMH350VSN472MQ25S	
	27,000	22×50	0.50	2.93	EKMH100VSN273MP50S		5,600	22×35	0.25	1.95	EKMH350VSN562MP35S	
	27,000	25.4×40	0.50	2.90	EKMH100VSN273MQ40S		5,600	25.4×30	0.25	1.96	EKMH350VSN562MQ30S	
	27,000	30×30	0.50	2.87	EKMH100VSN273MR30S		5,600	30×25	0.25	1.99	EKMH350VSN562MR25S	
	27,000	35×25	0.50	2.73	EKMH100VSN273MA25S		6,800	22×40	0.25	2.20	EKMH350VSN682MP40S	
	33,000	25.4×45	0.50	3.30	EKMH100VSN333MQ45S		6,800	25.4×35	0.25	2.23	EKMH350VSN682MQ35S	
	33,000	30×35	0.50	3.28	EKMH100VSN333MR35S		6,800	30×25	0.25	2.19	EKMH350VSN682MR25S	
	33,000	35×30	0.50	3.16	EKMH100VSN333MA30S		8,200	22×50	0.25	2.55	EKMH350VSN822MP50S	
	39,000	25.4×50	0.50	3.68	EKMH100VSN393MQ50S		8,200	25.4×40	0.25	2.53	EKMH350VSN822MQ40S	
	39,000	30×40	0.50	3.69	EKMH100VSN393MR40S		8,200	30×30	0.25	2.75	EKMH350VSN822MR30S	
	39,000	35×30	0.50	3.43	EKMH100VSN393MA30S		8,200	35×25	0.25	2.75	EKMH350VSN822MA25S	
	47,000	30×45	0.50	4.17	EKMH100VSN473MR45S		10,000	25.4×45	0.25	2.87	EKMH350VSN103MQ45S	
	47,000	35×35	0.50	3.76	EKMH100VSN473MA35S		10,000	30×35	0.25	2.90	EKMH350VSN103MR35S	
	56,000	30×50	0.50	4.68	EKMH100VSN563MR50S		10,000	35×30	0.25	2.91	EKMH350VSN103MA30S	
	56,000	35×40	0.50	4.67	EKMH100VSN563MA40S		12,000	25.4×50	0.25	3.24	EKMH350VSN123MQ50S	
	68,000	35×50	0.50	5.46	EKMH100VSN683MA50S		12,000	30×40	0.25	3.23	EKMH350VSN123MR40S	
	16	6,800	22×25	0.40	1.57		EKMH160VSN682MP25S	12,000	35×30	0.25	2.99	EKMH350VSN123MA30S
10,000		22×30	0.40	1.97	EKMH160VSN103MP30S	15,000	30×45	0.25	3.72	EKMH350VSN153MR45S		
1,000		25.4×25	0.40	1.97	EKMH160VSN103MQ25S	15,000	35×35	0.25	3.67	EKMH350VSN153MA35S		
12,000		22×35	0.40	2.22	EKMH160VSN123MP35S	18,000	35×40	0.25	4.37	EKMH350VSN183MA40S		
12,000		25.4×30	0.40	2.24	EKMH160VSN123MQ30S	22,000	35×50	0.25	4.92	EKMH350VSN223MA50S		
12,000		30×25	0.40	2.45	EKMH160VSN123MR25S	50	1,800	22×25	0.20	1.33	EKMH500VSN182MP25S	
15,000		22×40	0.40	2.55	EKMH160VSN153MP40S		2,700	22×30	0.20	1.69	EKMH500VSN272MP30S	
15,000		25.4×35	0.40	2.58	EKMH160VSN153MQ35S		2,700	25.4×25	0.20	1.70	EKMH500VSN272MQ25S	
15,000		30×25	0.40	2.52	EKMH160VSN153MR25S		3,300	22×35	0.20	1.93	EKMH500VSN332MP35S	
18,000		22×45	0.40	2.87	EKMH160VSN183MP45S		3,300	25.4×30	0.20	1.85	EKMH500VSN332MQ30S	
18,000		25.4×40	0.40	2.92	EKMH160VSN183MQ40S		3,900	22×40	0.20	2.16	EKMH500VSN392MP40S	
18,000		30×30	0.40	2.88	EKMH160VSN183MR30S		3,900	25.4×35	0.20	2.18	EKMH500VSN392MQ35S	
18,000		35×25	0.40	2.92	EKMH160VSN183MA25S		3,900	30×25	0.20	1.95	EKMH500VSN392MR25S	
22,000		25.4×45	0.40	3.32	EKMH160VSN223MQ45S		4,700	22×45	0.20	2.43	EKMH500VSN472MP45S	
22,000		30×35	0.40	3.29	EKMH160VSN223MR35S		4,700	25.4×35	0.20	2.39	EKMH500VSN472MQ35S	
22,000		35×25	0.40	3.23	EKMH160VSN223MA25S		4,700	30×30	0.20	2.25	EKMH500VSN472MR30S	
27,000		25.4×50	0.40	3.78	EKMH160VSN273MQ50S		4,700	35×25	0.20	2.48	EKMH500VSN472MA25S	
27,000		30×40	0.40	3.77	EKMH160VSN273MR40S		5,600	22×50	0.20	2.75	EKMH500VSN562MP50S	

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.
50	5,600	25.4×40	0.20	2.70	EKMH500VSN562MQ40S	80	1,800	25.4×30	0.15	1.76	EKMH800VSN182MQ30S
	5,600	30×35	0.20	2.76	EKMH500VSN562MR35S		1,800	30×25	0.15	1.65	EKMH800VSN182MR25S
	5,600	35×25	0.20	2.70	EKMH500VSN562MA25S		2,200	22×45	0.15	2.04	EKMH800VSN222MP45S
	6,800	25.4×50	0.20	3.30	EKMH500VSN682MQ50S		2,200	25.4×35	0.15	2.01	EKMH800VSN222MQ35S
	6,800	30×40	0.20	3.30	EKMH500VSN682MR40S		2,200	30×30	0.15	2.05	EKMH800VSN222MR30S
	6,800	35×30	0.20	3.25	EKMH500VSN682MA30S		2,200	35×25	0.15	2.07	EKMH800VSN222MA25S
	8,200	30×45	0.20	3.60	EKMH500VSN822MR45S		2,700	25.4×45	0.15	2.36	EKMH800VSN272MQ45S
	8,200	35×35	0.20	3.55	EKMH500VSN822MA35S		2,700	30×35	0.15	2.35	EKMH800VSN272MR35S
	10,000	30×50	0.20	4.04	EKMH500VSN103MR50S		2,700	35×25	0.15	2.29	EKMH800VSN272MA25S
	10,000	35×40	0.20	4.03	EKMH500VSN103MA40S		3,300	25.4×50	0.15	2.68	EKMH800VSN332MQ50S
63	12,000	35×45	0.20	4.55	EKMH500VSN123MA45S		3,300	30×40	0.15	2.68	EKMH800VSN332MR40S
	1,200	22×25	0.15	1.19	EKMH630VSN122MP25S		3,300	35×30	0.15	2.45	EKMH800VSN332MA30S
	1,500	22×25	0.15	1.33	EKMH630VSN152MP25S		3,900	30×45	0.15	3.00	EKMH800VSN392MR45S
	1,800	22×30	0.15	1.51	EKMH630VSN182MP30S		3,900	35×35	0.15	2.98	EKMH800VSN392MA35S
	1,800	25.4×25	0.15	1.52	EKMH630VSN182MQ25S		4,700	30×50	0.15	3.39	EKMH800VSN472MR50S
	2,200	22×35	0.15	1.73	EKMH630VSN222MP35S		4,700	35×40	0.15	3.38	EKMH800VSN472MA40S
	2,200	25.4×30	0.15	1.74	EKMH630VSN222MQ30S		5,600	35×45	0.15	3.80	EKMH800VSN562MA45S
	2,700	22×40	0.15	1.97	EKMH630VSN272MP40S		6,800	35×50	0.15	3.90	EKMH800VSN682MA50S
	2,700	25.4×35	0.15	1.99	EKMH630VSN272MQ35S	100	560	22×25	0.15	1.05	EKMH101VSN561MP25S
	2,700	30×25	0.15	1.76	EKMH630VSN272MR25S		820	22×30	0.15	1.32	EKMH101VSN821MP30S
80	3,300	22×50	0.15	2.29	EKMH630VSN332MP50S		820	25.4×25	0.15	1.33	EKMH101VSN821MQ25S
	3,300	25.4×40	0.15	2.27	EKMH630VSN332MQ40S		1,000	22×35	0.15	1.50	EKMH101VSN102MP35S
	3,300	30×30	0.15	2.24	EKMH630VSN332MR30S		1,000	25.4×30	0.15	1.51	EKMH101VSN102MQ30S
	3,300	35×25	0.15	2.06	EKMH630VSN332MA25S		1,200	22×40	0.15	1.69	EKMH101VSN122MP40S
	3,900	25.4×45	0.15	2.54	EKMH630VSN392MQ45S		1,200	25.4×35	0.15	1.71	EKMH101VSN122MQ35S
	3,900	30×35	0.15	2.55	EKMH630VSN392MR35S		1,200	30×25	0.15	1.68	EKMH101VSN122MR25S
	3,900	35×25	0.15	2.24	EKMH630VSN392MA25S		1,500	22×45	0.15	1.94	EKMH101VSN152MP45S
	4,700	25.4×50	0.15	2.86	EKMH630VSN472MQ50S		1,500	25.4×40	0.15	1.98	EKMH101VSN152MQ40S
	4,700	30×40	0.15	2.86	EKMH630VSN472MR40S		1,500	30×30	0.15	1.95	EKMH101VSN152MR30S
	4,700	35×30	0.15	2.79	EKMH630VSN472MA30S		1,500	35×25	0.15	1.98	EKMH101VSN152MA25S
80	5,600	30×45	0.15	3.22	EKMH630VSN562MR45S		1,800	25.4×45	0.15	2.23	EKMH101VSN182MQ45S
	5,600	35×35	0.15	3.19	EKMH630VSN562MA35S		1,800	30×35	0.15	2.50	EKMH101VSN182MR35S
	6,800	30×50	0.15	3.65	EKMH630VSN682MR50S		1,800	35×25	0.15	2.17	EKMH101VSN182MA25S
	6,800	35×40	0.15	3.64	EKMH630VSN682MA40S		2,200	25.4×50	0.15	2.53	EKMH101VSN222MQ50S
	8,200	35×45	0.15	3.90	EKMH630VSN822MA45S		2,200	30×40	0.15	2.70	EKMH101VSN222MR40S
	10,000	35×50	0.15	4.40	EKMH630VSN103MA50S		2,200	35×30	0.15	2.50	EKMH101VSN222MA30S
	820	22×25	0.15	1.11	EKMH800VSN821MP25S		2,700	30×45	0.15	2.88	EKMH101VSN272MR45S
	1,000	22×25	0.15	1.22	EKMH800VSN102MP25S		2,700	35×35	0.15	2.86	EKMH101VSN272MA35S
	1,200	22×30	0.15	1.38	EKMH800VSN122MP30S		3,300	30×50	0.15	3.28	EKMH101VSN332MR50S
	1,200	25.4×25	0.15	1.39	EKMH800VSN122MQ25S		3,300	35×40	0.15	3.27	EKMH101VSN332MA40S
80	1,500	22×35	0.15	1.59	EKMH800VSN152MP35S		3,900	35×45	0.15	3.67	EKMH101VSN392MA45S
	1,500	25.4×30	0.15	1.61	EKMH800VSN152MQ30S		4,700	35×50	0.15	3.80	EKMH101VSN472MA50S
	1,800	22×40	0.15	1.80	EKMH800VSN182MP40S						

◆RATED RIPPLE CURRENT MULTIPLIERS


●Frequency Multipliers

Frequency (Hz)	50	120	300	1k	10k	50k
6.3 to 50Vdc	0.95	1.00	1.03	1.05	1.08	1.08
63 to 100Vdc	0.92	1.00	1.07	1.13	1.19	1.20

The endurance of capacitors is shorted with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

SLM Series

- 15mm height snap-ins
- Endurance with ripple current : 2,000 hours at 85°C
- Non solvent-proof type
- RoHS Compliant




SPECIFICATIONS

Items	Characteristics		
Category	Temperature Range		
Temperature Range	-25 to +85°C		
Rated Voltage Range	160 to 400V _{dc}		
Capacitance Tolerance	±20% (M)		
Leakage Current	I ≤ 3√CV Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)		
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	160 to 400V	(at 20°C, 120Hz)
Low Temperature Characteristics (Max. Impedance Ratio)	tanδ (Max.)	0.20	(at 20°C, 120Hz)
Endurance	Rated voltage (V _{dc})	160 to 400V	(at 20°C after 5 minutes)
Shelf Life	Z (-25°C) / Z (+20°C)	4	(at 120Hz)
The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 85°C.			
Capacitance change			
D.F. (tanδ)			
Leakage current			
The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 85°C without voltage applied.			
Capacitance change			
D.F. (tanδ)			
Leakage current			


DIMENSIONS [mm]

- Terminal Code : VS

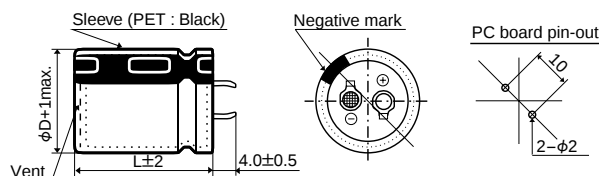

No plastic disk is the standard design

PART NUMBERING SYSTEM

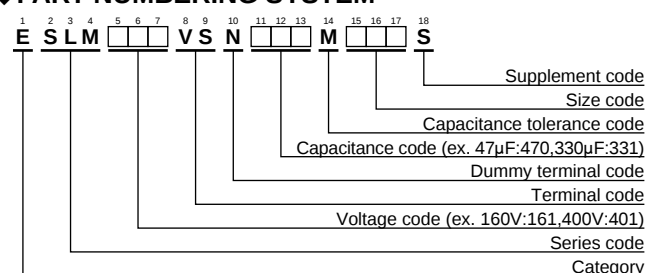

Please refer to "A guide to global code (snap-in type)"

RATED RIPPLE CURRENT MULTIPLIERS

- Frequency Multipliers

Frequency (Hz)	50	120	300	1k	10k	50k
160 to 250V _{dc}	0.81	1.00	1.17	1.32	1.45	1.50
400V _{dc}	0.77	1.00	1.16	1.30	1.41	1.43

The endurance of capacitors is shortened with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise.
When long life performance is required in actual use, the rms ripple current has to be reduced.

STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/ 85°C, 120Hz)	Part No.
160	180	22 × 15	0.20	0.99	ESLM161VSN181MP15S
	270	25.4 × 15	0.20	1.29	ESLM161VSN271MQ15S
	390	30 × 15	0.20	1.47	ESLM161VSN391MR15S
	560	35 × 15	0.20	1.74	ESLM161VSN561MA15S
180	150	22 × 15	0.20	0.90	ESLM181VSN151MP15S
	220	25.4 × 15	0.20	1.16	ESLM181VSN221MQ15S
	330	30 × 15	0.20	1.35	ESLM181VSN331MR15S
	470	35 × 15	0.20	1.60	ESLM181VSN471MA15S
200	150	22 × 15	0.20	0.90	ESLM201VSN151MP15S
	220	25.4 × 15	0.20	1.16	ESLM201VSN221MQ15S
200	270	30 × 15	0.20	1.22	ESLM201VSN271MR15S
	390	35 × 15	0.20	1.46	ESLM201VSN391MA15S
250	100	22 × 15	0.20	0.73	ESLM251VSN101MP15S
	150	25.4 × 15	0.20	0.96	ESLM251VSN151MQ15S
	220	30 × 15	0.20	1.10	ESLM251VSN221MR15S
	330	35 × 15	0.20	1.34	ESLM251VSN331MA15S
400	47	22 × 15	0.20	0.50	ESLM401VSN470MP15S
	68	25.4 × 15	0.20	0.65	ESLM401VSN680MQ15S
	100	30 × 15	0.20	0.74	ESLM401VSN101MR15S
	120	35 × 15	0.20	0.81	ESLM401VSN121MA15S

KLM Series

- 15mm height snap-ins
- Endurance with ripple current : 2,000 hours at 105°C
- Non solvent-proof type
- RoHS Compliant

SPECIFICATIONS

Items	Characteristics	
Category	Temperature Range	
Temperature Range	-25 to +105°C	
Rated Voltage Range	160 to 400V _{dc}	
Capacitance Tolerance	±20% (M)	
Leakage Current	$I \leq 3\sqrt{CV}$ Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)	
	(at 20°C after 5 minutes)	
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	160 to 400V
	tanδ (Max.)	0.20
	(at 20°C, 120Hz)	
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	160 to 400V
	Z (-25°C) / Z (+20°C)	4
	(at 120Hz)	
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 105°C.	
	Capacitance change	≤±20% of the initial value
	D.F. (tanδ)	≤200% of the initial specified value
	Leakage current	≤The initial specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.	
	Capacitance change	≤±15% of the initial value
	D.F. (tanδ)	≤150% of the initial specified value
	Leakage current	≤The initial specified value

KLM


Low profile

KMH




DIMENSIONS [mm]

- Terminal Code : VS

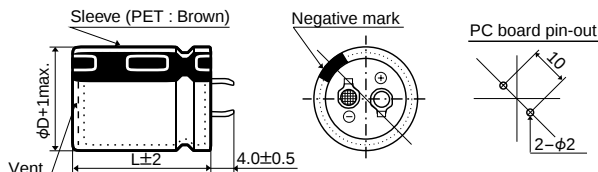

No plastic disk is the standard design

PART NUMBERING SYSTEM

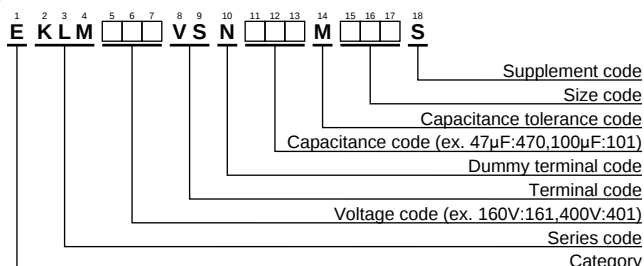

Please refer to "A guide to global code (snap-in type)"

STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.
160	150	22 × 15	0.20	0.68	EKLM161VSN151MP15S
	180	25.4 × 15	0.20	0.79	EKLM161VSN181MQ15S
	220	25.4 × 15	0.20	0.88	EKLM161VSN221MQ15S
	270	30 × 15	0.20	0.96	EKLM161VSN271MR15S
	330	30 × 15	0.20	1.06	EKLM161VSN331MR15S
180	390	35 × 15	0.20	1.20	EKLM161VSN391MA15S
	120	22 × 15	0.20	0.61	EKLM181VSN121MP15S
	150	25.4 × 15	0.20	0.73	EKLM181VSN151MQ15S
	180	25.4 × 15	0.20	0.79	EKLM181VSN181MQ15S
	220	30 × 15	0.20	0.86	EKLM181VSN221MR15S
200	270	30 × 15	0.20	0.96	EKLM181VSN271MR15S
	330	35 × 15	0.20	1.10	EKLM181VSN331MA15S
	390	35 × 15	0.20	1.17	EKLM181VSN391MA15S
	120	22 × 15	0.20	0.61	EKLM201VSN121MP15S
	150	25.4 × 15	0.20	0.73	EKLM201VSN151MQ15S
250	180	30 × 15	0.20	0.79	EKLM201VSN181MR15S
	220	30 × 15	0.20	0.86	EKLM201VSN221MR15S
	270	30 × 15	0.20	0.96	EKLM201VSN271MR15S
	330	35 × 15	0.20	1.10	EKLM201VSN331MA15S
	390	35 × 15	0.20	1.17	EKLM201VSN391MA15S
400	82	22 × 15	0.20	0.50	EKLM251VSN820MP15S
	100	25.4 × 15	0.20	0.59	EKLM251VSN101MQ15S
	120	25.4 × 15	0.20	0.65	EKLM251VSN121MQ15S
	150	30 × 15	0.20	0.71	EKLM251VSN151MR15S
	180	30 × 15	0.20	0.79	EKLM251VSN181MR15S
400	220	35 × 15	0.20	0.90	EKLM251VSN221MA15S
	39	22 × 15	0.20	0.35	EKLM401VSN390MP15S
	47	25.4 × 15	0.20	0.40	EKLM401VSN470MQ15S
	56	25.4 × 15	0.20	0.44	EKLM401VSN560MQ15S
	68	30 × 15	0.20	0.46	EKLM401VSN680MR15S
400	82	30 × 15	0.20	0.51	EKLM401VSN820MR15S
	100	35 × 15	0.20	0.56	EKLM401VSN101MA15S
	120	35 × 15	0.20	0.62	EKLM401VSN121MA15S

RATED RIPPLE CURRENT MULTIPLIERS

- Frequency Multipliers

Frequency (Hz)	50	120	300	1k	10k	50k
160 to 250V _{dc}	0.81	1.00	1.17	1.32	1.45	1.50
400V _{dc}	0.77	1.00	1.16	1.30	1.41	1.43

The endurance of capacitors is shortened with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

LXM Series

- Endurance with ripple current : 7,000 hours at 105°C
- Non solvent-proof type
- RoHS Compliant

LXM

Longer life
LXQ




SPECIFICATIONS

Items	Characteristics				
Category					
Temperature Range	-25 to +105°C				
Rated Voltage Range	160 to 450V _{dc}				
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)				
Leakage Current	I≤3√CV Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 5 minutes)				
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	160 to 400V	420 & 450V	(at 20°C, 120Hz)	
	tanδ (Max.)	0.15	0.20		
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	160 to 400V	420 & 450V	(at 120Hz)	
	Z(-25°C)/Z(+20°C)	4	8		
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 7,000 hours at 105°C.				
	Capacitance change	≤±20% of the initial value			
	D.F. (tanδ)	≤250% of the initial specified value			
	Leakage current	≤The initial specified value			
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.				
	Capacitance change	≤±15% of the initial value			
	D.F. (tanδ)	≤150% of the initial specified value			
	Leakage current	≤The initial specified value			

DIMENSIONS [mm]


- Terminal Code : VS (φ22 to φ35) : Standard

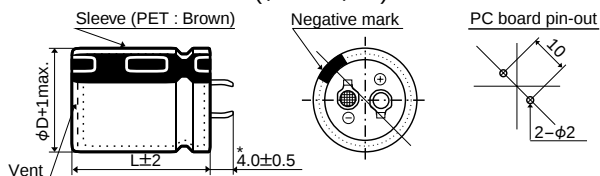


*φD=35mm : 3.5±0.5mm

No plastic disk is the standard design

- Terminal Code : LI (φ35)

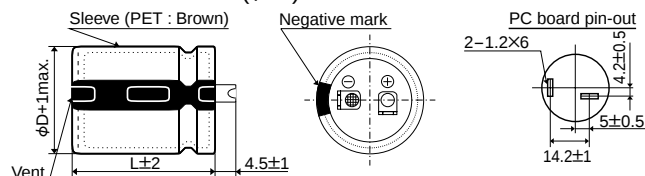

PART NUMBERING SYSTEM

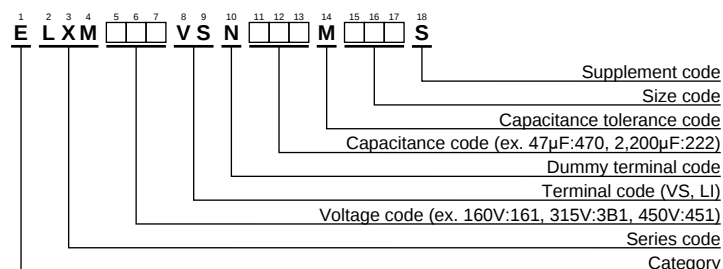

Please refer to "A guide to global code (snap-in type)"

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.
160	330	22×25	0.15	1.11	ELXM161VSN331MP25S	220	220	22×25	0.15	0.90	ELXM221VSN221MP25S
	390	22×30	0.15	1.26	ELXM161VSN391MP30S		270	22×30	0.15	1.05	ELXM221VSN271MP30S
	470	22×30	0.15	1.39	ELXM161VSN471MP30S		330	22×35	0.15	1.19	ELXM221VSN331MP35S
	470	25.4×25	0.15	1.38	ELXM161VSN471MQ25S		330	25.4×25	0.15	1.16	ELXM221VSN331MQ25S
	560	22×35	0.15	1.55	ELXM161VSN561MP35S		390	22×40	0.15	1.33	ELXM221VSN391MP40S
	560	25.4×30	0.15	1.55	ELXM161VSN561MQ30S		390	25.4×30	0.15	1.29	ELXM221VSN391MQ30S
	680	22×40	0.15	1.75	ELXM161VSN681MP40S		470	22×45	0.15	1.49	ELXM221VSN471MP45S
	680	25.4×35	0.15	1.78	ELXM161VSN681MQ35S		470	25.4×35	0.15	1.48	ELXM221VSN471MQ35S
	680	30×25	0.15	1.74	ELXM161VSN681MR25S		470	30×25	0.15	1.45	ELXM221VSN471MR25S
	820	22×50	0.15	1.97	ELXM161VSN821MP50S		560	22×50	0.15	1.63	ELXM221VSN561MP50S
	820	25.4×40	0.15	2.01	ELXM161VSN821MQ40S		560	25.4×40	0.15	1.71	ELXM221VSN561MQ40S
	820	30×30	0.15	1.96	ELXM161VSN821MR30S		560	30×30	0.15	1.62	ELXM221VSN561MR30S
	1,000	25.4×45	0.15	2.27	ELXM161VSN102MQ45S		680	25.4×45	0.15	1.87	ELXM221VSN681MQ45S
	1,000	30×35	0.15	2.26	ELXM161VSN102MR35S		680	30×35	0.15	1.86	ELXM221VSN102MR35S
	1,200	25.4×50	0.15	2.54	ELXM161VSN122MQ50S		820	25.4×50	0.15	2.10	ELXM221VSN821MQ50S
	1,200	30×40	0.15	2.56	ELXM161VSN122MR40S		820	30×40	0.15	2.12	ELXM221VSN821MR40S
	1,200	35×30	0.15	2.52	ELXM161VSN122MA30S		820	35×30	0.15	2.08	ELXM221VSN821MA30S
	1,500	30×45	0.15	2.96	ELXM161VSN152MR45S		1,000	30×50	0.15	2.48	ELXM221VSN102MR50S
	1,500	35×35	0.15	2.89	ELXM161VSN152MA35S		1,000	35×40	0.15	2.46	ELXM221VSN102MA40S
	1,800	30×50	0.15	3.32	ELXM161VSN182MR50S		1,200	35×45	0.15	2.78	ELXM221VSN122MA45S
180	1,800	35×40	0.15	3.30	ELXM161VSN182MA40S	250	1,500	35×50	0.15	3.20	ELXM221VSN152MA50S
	2,200	35×50	0.15	3.87	ELXM161VSN222MA50S		180	22×25	0.15	0.82	ELXM251VSN181MP25S
	270	22×25	0.15	1.00	ELXM181VSN271MP25S		220	22×30	0.15	0.95	ELXM251VSN221MP30S
	330	22×30	0.15	1.16	ELXM181VSN331MP30S		270	22×35	0.15	1.08	ELXM251VSN271MP35S
	390	22×30	0.15	1.26	ELXM181VSN391MP30S		270	25.4×25	0.15	1.05	ELXM251VSN271MQ25S
	390	25.4×25	0.15	1.26	ELXM181VSN391MQ25S		330	22×40	0.15	1.22	ELXM251VSN331MP40S
	470	22×35	0.15	1.42	ELXM181VSN471MP35S		330	25.4×30	0.15	1.19	ELXM251VSN331MQ30S
	470	25.4×30	0.15	1.42	ELXM181VSN471MQ30S		390	22×45	0.15	1.36	ELXM251VSN391MP45S
	560	22×40	0.15	1.59	ELXM181VSN561MP40S		390	25.4×35	0.15	1.35	ELXM251VSN391MQ35S
	560	25.4×30	0.15	1.55	ELXM181VSN561MQ30S		390	30×25	0.15	1.32	ELXM251VSN391MR25S
	560	30×25	0.15	1.58	ELXM181VSN561MR25S		470	22×50	0.15	1.49	ELXM251VSN471MP50S
	680	22×45	0.15	1.79	ELXM181VSN681MP45S		470	25.4×40	0.15	1.52	ELXM251VSN471MQ40S
	680	25.4×35	0.15	1.78	ELXM181VSN681MQ35S		470	30×30	0.15	1.49	ELXM251VSN471MR30S
	680	30×30	0.15	1.79	ELXM181VSN681MR30S		560	25.4×45	0.15	1.70	ELXM251VSN561MQ45S
	820	25.4×40	0.15	2.01	ELXM181VSN821MQ40S		560	30×35	0.15	1.69	ELXM251VSN561MR35S
	820	30×35	0.15	2.04	ELXM181VSN821MR35S		680	25.4×50	0.15	1.91	ELXM251VSN681MQ50S
	1,000	25.4×50	0.15	2.32	ELXM181VSN102MQ50S		680	30×40	0.15	1.93	ELXM251VSN681MR40S
	1,000	30×35	0.15	2.26	ELXM181VSN102MR35S		680	35×30	0.15	1.90	ELXM251VSN681MA30S
	1,000	35×30	0.15	2.30	ELXM181VSN102MA30S		820	30×45	0.15	2.19	ELXM251VSN821MR45S
200	1,200	30×45	0.15	2.65	ELXM181VSN122MR45S	315	820	35×35	0.15	2.13	ELXM251VSN821MA35S
	1,200	35×35	0.15	2.58	ELXM181VSN122MA35S		1,000	35×40	0.15	2.46	ELXM251VSN102MA40S
	1,500	30×50	0.15	3.03	ELXM181VSN152MR50S		1,200	35×50	0.15	2.86	ELXM251VSN122MA50S
	1,500	35×40	0.15	3.01	ELXM181VSN152MA40S		100	22×25	0.15	0.67	ELXM3B1VSN101MP25S
	1,800	35×45	0.15	3.41	ELXM181VSN182MA45S		120	22×30	0.15	0.77	ELXM3B1VSN121MP30S
	2,200	35×50	0.15	3.87	ELXM181VSN222MA50S		150	22×30	0.15	0.86	ELXM3B1VSN151MP30S
	220	22×25	0.15	0.90	ELXM201VSN221MP25S		150	25.4×25	0.15	0.85	ELXM3B1VSN151MQ25S
	270	22×30	0.15	1.05	ELXM201VSN271MP30S		180	22×35	0.15	0.96	ELXM3B1VSN181MP35S
	330	22×30	0.15	1.16	ELXM201VSN331MP30S		180	25.4×30	0.15	0.96	ELXM3B1VSN181MQ30S
	330	25.4×25	0.15	1.16	ELXM201VSN331MQ25S		220	22×40	0.15	1.09	ELXM3B1VSN221MP40S
	390	22×35	0.15	1.29	ELXM201VSN391MP35S		220	25.4×30	0.15	1.06	ELXM3B1VSN221MQ30S
	390	25.4×30	0.15	1.29	ELXM201VSN391MQ30S		220	30×25	0.15	1.08	ELXM3B1VSN221MR25S
	470	22×40	0.15	1.46	ELXM201VSN471MP40S		270	22×45	0.15	1.24	ELXM3B1VSN271MP45S
	470	25.4×30	0.15	1.42	ELXM201VSN471MQ30S		270	25.4×35	0.15	1.23	ELXM3B1VSN271MQ35S
	470	30×25	0.15	1.45	ELXM201VSN471MR25S		270	30×30	0.15	1.23	ELXM3B1VSN271MR30S
	560	22×45	0.15	1.63	ELXM201VSN561MP45S		330	25.4×40	0.15	1.40	ELXM3B1VSN331MQ40S
	560	25.4×35	0.15	1.62	ELXM201VSN561MQ35S		330	30×35	0.15	1.42	ELXM3B1VSN331MR35S
	560	30×30	0.15	1.62	ELXM201VSN561MR30S		330	35×30	0.15	1.45	ELXM3B1VSN331MA30S
	680	25.4×40	0.15	1.83	ELXM201VSN681MQ40S		390	25.4×50	0.15	1.59	ELXM3B1VSN391MQ50S
	680	30×30	0.15	1.79	ELXM201VSN681MR30S		390	30×35	0.15	1.54	ELXM3B1VSN391MR35S
	820	25.4×45	0.15	2.06	ELXM201VSN821MQ45S		390	35×30	0.15	1.57	ELXM3B1VSN391MA30S
	820	30×35	0.15	2.04	ELXM201VSN821MR35S		470	30×45	0.15	1.81	ELXM3B1VSN471MR45S
	1,000	30×45	0.15	2.42	ELXM201VSN102MR45S		470	35×35	0.15	1.77	ELXM3B1VSN471MA35S
	1,000	35×30	0.15	2.30	ELXM201VSN102MA30S		560	30×50	0.15	2.03	ELXM3B1VSN561MR50S
	1,200	30×50	0.15	2.71	ELXM201VSN122MR50S		560	35×40	0.15	2.02	ELXM3B1VSN561MA40S
	1,200	35×40	0.15	2.70	ELXM201VSN122MA40S		680	35×45	0.15	2.29	ELXM3B1VSN681MA45S
	1,500	35×45	0.15	3.11	ELXM201VSN152MA45S		820	35×50	0.15	2.59	ELXM3B1VSN821MA50S
	1,800	35×50	0.15	3.50	ELXM201VSN182MA50S						

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)	Part No.
350	100	22×25	0.15	0.67	ELXM351VSN101MP25S	420	56	22×25	0.20	0.50	ELXM421VSN560MP25S
	120	22×30	0.15	0.77	ELXM351VSN121MP30S		68	22×30	0.20	0.58	ELXM421VSN680MP30S
	120	25.4×25	0.15	0.76	ELXM351VSN121MQ25S		82	22×30	0.20	0.63	ELXM421VSN820MP30S
	150	22×35	0.15	0.88	ELXM351VSN151MP35S		82	25.4×25	0.20	0.63	ELXM421VSN820MQ25S
	150	25.4×30	0.15	0.88	ELXM351VSN151MQ30S		100	22×35	0.20	0.72	ELXM421VSN101MP35S
	180	22×40	0.15	0.99	ELXM351VSN181MP40S		100	25.4×30	0.20	0.72	ELXM421VSN101MQ30S
	180	25.4×30	0.15	0.96	ELXM351VSN181MQ30S		120	22×40	0.20	0.81	ELXM421VSN121MP40S
	180	30×25	0.15	0.98	ELXM351VSN181MR25S		120	25.4×30	0.20	0.79	ELXM421VSN121MQ30S
	220	22×45	0.15	1.12	ELXM351VSN221MP45S		120	30×25	0.20	0.80	ELXM421VSN121MR25S
	220	25.4×35	0.15	1.11	ELXM351VSN221MQ35S		150	22×45	0.20	0.92	ELXM421VSN151MP45S
	220	30×30	0.15	1.11	ELXM351VSN221MR30S		150	25.4×35	0.20	0.92	ELXM421VSN151MQ35S
	270	25.4×40	0.15	1.26	ELXM351VSN271MQ40S		150	30×30	0.20	0.92	ELXM421VSN151MR30S
	270	30×35	0.15	1.28	ELXM351VSN271MR35S		180	25.4×40	0.20	1.03	ELXM421VSN181MQ40S
	330	25.4×45	0.15	1.40	ELXM351VSN331MA35S		180	30×35	0.20	1.05	ELXM421VSN181MR35S
	330	30×35	0.15	1.42	ELXM351VSN331MR35S		220	25.4×50	0.20	1.19	ELXM421VSN221MQ50S
	330	35×30	0.15	1.45	ELXM351VSN331MA30S		220	30×35	0.20	1.16	ELXM421VSN221MR35S
	390	30×40	0.15	1.60	ELXM351VSN391MR40S		220	35×30	0.20	1.18	ELXM421VSN221MA30S
	390	35×35	0.15	1.61	ELXM351VSN391MA35S		270	30×45	0.20	1.38	ELXM421VSN271MR45S
	470	30×50	0.15	1.86	ELXM351VSN471MR50S		270	35×35	0.20	1.34	ELXM421VSN271MA35S
	470	35×40	0.15	1.85	ELXM351VSN471MA40S		330	30×50	0.20	1.56	ELXM421VSN331MR50S
400	560	35×40	0.15	2.02	ELXM351VSN561MA40S	450	330	35×40	0.20	1.55	ELXM421VSN331MA40S
	680	35×50	0.15	2.36	ELXM351VSN681MA50S		390	35×45	0.20	1.74	ELXM421VSN391MA45S
	68	22×25	0.15	0.55	ELXM401VSN680MP25S		470	35×50	0.20	1.96	ELXM421VSN471MA50S
	82	22×30	0.15	0.63	ELXM401VSN820MP30S		47	22×25	0.20	0.46	ELXM451VSN470MP25S
	100	22×30	0.15	0.70	ELXM401VSN101MP30S		56	22×30	0.20	0.52	ELXM451VSN560MP30S
	100	25.4×25	0.15	0.70	ELXM401VSN101MQ25S		68	22×30	0.20	0.58	ELXM451VSN680MP30S
	120	22×35	0.15	0.79	ELXM401VSN121MP35S		68	25.4×25	0.20	0.58	ELXM451VSN680MQ25S
	120	25.4×30	0.15	0.79	ELXM401VSN121MQ30S		82	22×35	0.20	0.65	ELXM451VSN820MP35S
	150	22×40	0.15	0.90	ELXM401VSN151MP40S		82	25.4×30	0.20	0.65	ELXM451VSN820MQ30S
	150	25.4×30	0.15	0.88	ELXM401VSN151MQ30S		100	22×40	0.20	0.74	ELXM451VSN101MP40S
	150	30×25	0.15	0.90	ELXM401VSN151MR25S		100	25.4×30	0.20	0.72	ELXM451VSN101MQ30S
	180	22×45	0.15	0.99	ELXM401VSN181MP45S		100	30×25	0.20	0.73	ELXM451VSN101MR25S
	180	25.4×35	0.15	1.01	ELXM401VSN181MQ35S		120	22×45	0.20	0.83	ELXM451VSN121MP45S
	180	30×30	0.15	1.01	ELXM401VSN181MR30S		120	25.4×35	0.20	0.82	ELXM451VSN121MQ35S
	220	25.4×40	0.15	1.14	ELXM401VSN221MQ40S		120	30×30	0.20	0.82	ELXM451VSN121MR30S
	220	30×35	0.15	1.16	ELXM401VSN221MR35S		150	25.4×40	0.20	0.94	ELXM451VSN151MQ40S
	270	25.4×50	0.15	1.32	ELXM401VSN271MQ50S		150	30×35	0.20	0.96	ELXM451VSN151MR35S
	270	30×40	0.15	1.33	ELXM401VSN271MR40S		180	25.4×45	0.20	1.06	ELXM451VSN181MQ45S
	270	35×30	0.15	1.31	ELXM401VSN271MA30S		180	30×35	0.20	1.05	ELXM451VSN181MR35S
	330	30×45	0.15	1.52	ELXM401VSN331MR45S		180	35×30	0.20	1.07	ELXM451VSN181MA30S
	330	35×35	0.15	1.48	ELXM401VSN331MA35S		220	30×40	0.20	1.20	ELXM451VSN221MR40S
	390	30×50	0.15	1.69	ELXM401VSN391MR50S		220	35×35	0.20	1.21	ELXM451VSN221MA35S
	390	35×40	0.15	1.68	ELXM401VSN391MA40S		270	30×50	0.20	1.41	ELXM451VSN271MR50S
	470	35×45	0.15	1.91	ELXM401VSN471MA45S		270	35×40	0.20	1.40	ELXM451VSN271MA40S
	560	35×50	0.15	2.14	ELXM401VSN561MA50S		330	35×45	0.20	1.60	ELXM451VSN331MA45S
							390	35×50	0.20	1.79	ELXM451VSN391MA50S

◆RATED RIPPLE CURRENT MULTIPLIERS


●Frequency Multipliers

Frequency(Hz)	50	120	300	1k	10k	50k
160 to 250V _{dc}	0.81	1.00	1.17	1.32	1.45	1.50
315 to 450V _{dc}	0.77	1.00	1.16	1.30	1.41	1.43

The endurance of capacitors is shorted with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

LXQ Series

- Endurance with ripple current : 5,000 hours at 105°C
- Downsized and higher ripple version of LXG series
- Non solvent-proof type
- RoHS Compliant




SPECIFICATIONS


Items	Characteristics		
Category	Temperature Range		
Temperature Range	-25 to +105°C		
Rated Voltage Range	160 to 450V _{dc}		
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)		
Leakage Current	I≤3√CV Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 5 minutes)		
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	160 to 400V	420 & 450V
	tanδ (Max.)	0.15	0.20 (at 20°C, 120Hz)
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	160 to 400V	420 & 450V
	Z(-25°C)/Z(+20°C)	4	8 (at 120Hz)
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 5,000 hours at 105°C.		
	Capacitance change	≤±20% of the initial value	
	D.F. (tanδ)	≤200% of the initial specified value	
	Leakage current	≤The initial specified value	
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.		
	Capacitance change	≤±15% of the initial value	
	D.F. (tanδ)	≤150% of the initial specified value	
	Leakage current	≤The initial specified value	

DIMENSIONS [mm]

●Terminal Code : VS (φ22 to φ35) : Standard

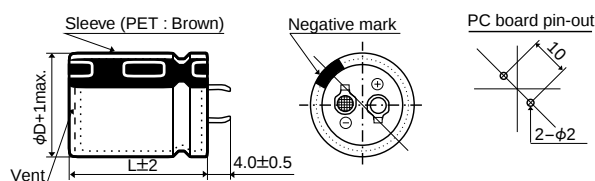


●Terminal Code : LI (φ30, φ35)

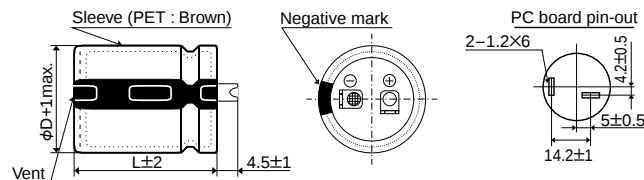

No plastic disk is the standard design

PART NUMBERING SYSTEM

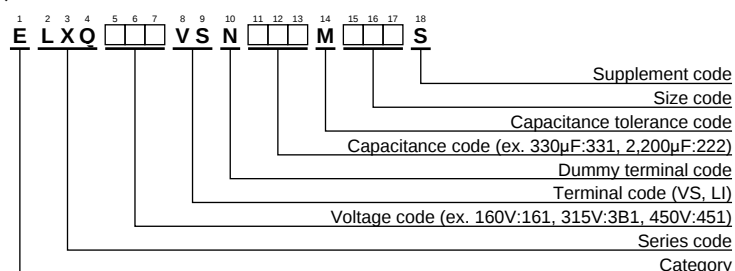

Please refer to "A guide to global code (snap-in type)"

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/ 105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/ 105°C,120Hz)	Part No.
160	390	22×25	0.15	1.32	ELXQ161VSN391MP25S	200	1,200	30×50	0.15	2.88	ELXQ201VSN122MR50S
	560	22×30	0.15	1.66	ELXQ161VSN561MP30S		1,200	35×35	0.15	2.88	ELXQ201VSN122MA35S
	560	25.4×25	0.15	1.68	ELXQ161VSN561MQ25S		1,500	35×40	0.15	3.34	ELXQ201VSN152MA40S
	680	22×35	0.15	1.87	ELXQ161VSN681MP35S		1,800	35×45	0.15	3.74	ELXQ201VSN182MA45S
	680	25.4×30	0.15	1.88	ELXQ161VSN681MQ30S		1,800	35×50	0.15	3.82	ELXQ201VSN182MA50S
	680	30×25	0.15	1.96	ELXQ161VSN681MR25S	220	270	22×25	0.15	1.10	ELXQ221VSN271MP25S
	820	22×40	0.15	2.09	ELXQ161VSN821MP40S		330	22×30	0.15	1.19	ELXQ221VSN331MP30S
	1,000	22×45	0.15	2.36	ELXQ161VSN102MP45S		390	25.4×25	0.15	1.39	ELXQ221VSN391MQ25S
	1,000	22×50	0.15	2.41	ELXQ161VSN102MP50S		470	22×35	0.15	1.55	ELXQ221VSN471MP35S
	1,000	25.4×35	0.15	2.38	ELXQ161VSN102MQ35S		470	25.4×30	0.15	1.56	ELXQ221VSN471MQ30S
	1,000	30×30	0.15	2.40	ELXQ161VSN102MR30S		470	30×25	0.15	1.63	ELXQ221VSN471MR25S
	1,000	35×25	0.15	2.55	ELXQ161VSN102MA25S		560	22×40	0.15	1.73	ELXQ221VSN561MP40S
	1,200	25.4×40	0.15	2.66	ELXQ161VSN122MQ40S		560	30×30	0.15	1.79	ELXQ221VSN561MR30S
	1,200	25.4×45	0.15	2.71	ELXQ161VSN122MQ45S		680	22×45	0.15	1.94	ELXQ221VSN681MA25S
	1,200	30×35	0.15	2.69	ELXQ161VSN122MR35S		680	22×50	0.15	1.99	ELXQ221VSN681MP50S
	1,200	30×40	0.15	2.77	ELXQ161VSN122MR40S		680	25.4×35	0.15	1.96	ELXQ221VSN681MQ35S
	1,200	35×30	0.15	2.86	ELXQ161VSN122MA30S		680	30×35	0.15	2.02	ELXQ221VSN681MR35S
	1,500	25.4×50	0.15	3.08	ELXQ161VSN152MQ50S		680	35×25	0.15	2.10	ELXQ221VSN681MA25S
	1,500	30×45	0.15	3.17	ELXQ161VSN152MR45S		820	25.4×40	0.15	2.20	ELXQ221VSN821MQ40S
	1,500	35×35	0.15	3.22	ELXQ161VSN152MA35S		820	25.4×45	0.15	2.24	ELXQ221VSN821MQ45S
	1,800	30×50	0.15	3.53	ELXQ161VSN182MR50S		820	30×40	0.15	2.29	ELXQ221VSN821MR40S
	1,800	35×40	0.15	3.66	ELXQ161VSN182MA40S		820	35×30	0.15	2.36	ELXQ221VSN821MA30S
	2,200	35×45	0.15	4.14	ELXQ161VSN222MA45S	250	1,000	25.4×50	0.15	2.51	ELXQ221VSN102MQ50S
180	2,700	35×50	0.15	4.68	ELXQ161VSN272MA50S		1,000	30×45	0.15	2.59	ELXQ221VSN102MR45S
	330	22×25	0.15	1.21	ELXQ181VSN331MP25S		1,000	35×35	0.15	2.63	ELXQ221VSN102MA35S
	470	22×30	0.15	1.52	ELXQ181VSN471MP30S		1,200	30×50	0.15	2.88	ELXQ221VSN122MR50S
	470	25.4×25	0.15	1.52	ELXQ181VSN471MQ25S		1,200	35×40	0.15	2.98	ELXQ221VSN122MA40S
	560	22×35	0.15	1.70	ELXQ181VSN561MP35S		1,500	35×45	0.15	3.41	ELXQ221VSN152MA45S
	560	30×25	0.15	1.78	ELXQ181VSN561MR25S		1,800	35×50	0.15	3.82	ELXQ221VSN182MA50S
	680	22×40	0.15	1.91	ELXQ181VSN681MP40S		220	22×25	0.15	1.01	ELXQ251VSN221MP25S
	680	25.4×30	0.15	1.88	ELXQ181VSN681MQ30S		270	22×30	0.15	1.20	ELXQ251VSN271MP30S
	820	22×45	0.15	1.99	ELXQ181VSN821MP45S		330	25.4×25	0.15	1.32	ELXQ251VSN331MQ25S
	820	25.4×35	0.15	2.16	ELXQ181VSN821MQ35S		390	22×35	0.15	1.44	ELXQ251VSN391MP35S
	820	30×30	0.15	2.17	ELXQ181VSN821MR30S		390	25.4×30	0.15	1.43	ELXQ251VSN391MQ30S
	820	35×25	0.15	2.31	ELXQ181VSN821MA25S		390	30×25	0.15	1.51	ELXQ251VSN391MR25S
	1,000	22×50	0.15	2.25	ELXQ181VSN102MP50S		470	22×40	0.15	1.62	ELXQ251VSN471MP40S
	1,000	25.4×40	0.15	2.43	ELXQ181VSN102MQ40S		560	22×45	0.15	1.80	ELXQ251VSN561MP45S
	1,000	25.4×45	0.15	2.47	ELXQ181VSN102MQ45S		560	22×50	0.15	1.84	ELXQ251VSN561MP50S
	1,000	30×35	0.15	2.46	ELXQ181VSN102MR35S		560	25.4×35	0.15	1.78	ELXQ251VSN561MQ35S
	1,200	25.4×50	0.15	2.75	ELXQ181VSN122MQ50S		560	30×30	0.15	1.83	ELXQ251VSN561MR30S
	1,200	30×40	0.15	2.77	ELXQ181VSN122MR40S		560	35×25	0.15	1.91	ELXQ251VSN561MA25S
	1,200	35×30	0.15	2.86	ELXQ181VSN122MA30S		680	25.4×40	0.15	2.00	ELXQ251VSN681MQ40S
	1,500	30×45	0.15	3.17	ELXQ181VSN152MR45S	315	680	25.4×45	0.15	2.04	ELXQ251VSN681MQ45S
200	1,500	30×50	0.15	3.22	ELXQ181VSN152MR50S		680	30×35	0.15	2.06	ELXQ251VSN681MR35S
	1,500	35×35	0.15	3.22	ELXQ181VSN152MA35S		680	35×30	0.15	2.15	ELXQ251VSN681MA30S
	1,800	35×40	0.15	3.66	ELXQ181VSN182MA40S		820	25.4×50	0.15	2.28	ELXQ251VSN821MQ50S
	1,800	35×45	0.15	3.74	ELXQ181VSN182MA45S		820	30×40	0.15	2.33	ELXQ251VSN821MR40S
	2,200	35×50	0.15	4.22	ELXQ181VSN222MA50S		820	30×45	0.15	2.39	ELXQ251VSN821MR45S
	270	22×25	0.15	1.10	ELXQ201VSN271MP25S		820	35×35	0.15	2.38	ELXQ251VSN821MA35S
	390	22×30	0.15	1.38	ELXQ201VSN391MP30S		1,000	30×50	0.15	2.68	ELXQ251VSN102MR50S
	390	25.4×25	0.15	1.39	ELXQ201VSN391MQ25S		1,000	35×40	0.15	2.72	ELXQ251VSN102MA40S
	470	22×35	0.15	1.55	ELXQ201VSN471MP35S		1,200	35×45	0.15	3.05	ELXQ251VSN122MA45S
	560	22×40	0.15	1.73	ELXQ201VSN561MP40S		1,500	35×50	0.15	3.49	ELXQ251VSN152MA50S
	560	25.4×30	0.15	1.71	ELXQ201VSN561MQ30S		150	22×25	0.15	0.80	ELXQ3B1VSN151MP25S
	560	30×25	0.15	1.78	ELXQ201VSN561MR25S		180	22×30	0.15	0.92	ELXQ3B1VSN181MP30S
	680	22×45	0.15	1.81	ELXQ201VSN681MP45S		180	25.4×25	0.15	0.94	ELXQ3B1VSN181MQ25S
	680	25.4×35	0.15	1.87	ELXQ201VSN681MQ35S		220	22×35	0.15	1.04	ELXQ3B1VSN221MP35S
	680	30×30	0.15	1.98	ELXQ201VSN681MR30S		220	30×25	0.15	1.17	ELXQ3B1VSN221MR25S
	680	35×25	0.15	2.10	ELXQ201VSN681MA25S		270	22×40	0.15	1.18	ELXQ3B1VSN271MP40S
	820	22×50	0.15	2.18	ELXQ201VSN821MP50S		270	25.4×30	0.15	1.19	ELXQ3B1VSN271MQ30S
	820	25.4×40	0.15	2.09	ELXQ201VSN821MQ40S		330	22×45	0.15	1.33	ELXQ3B1VSN331MP45S
	820	30×35	0.15	2.22	ELXQ201VSN821MR35S		330	25.4×35	0.15	1.37	ELXQ3B1VSN331MQ35S
	1,000	25.4×45	0.15	2.35	ELXQ201VSN102MQ45S		330	30×30	0.15	1.40	ELXQ3B1VSN331MR30S
	1,000	25.4×50	0.15	2.39	ELXQ201VSN102MQ50S		330	35×25	0.15	1.49	ELXQ3B1VSN331MA25S
	1,000	30×40	0.15	2.53	ELXQ201VSN102MR40S		390	22×50	0.15	1.48	ELXQ3B1VSN391MP50S
	1,000	35×30	0.15	2.61	ELXQ201VSN102MA30S		390	25.4×40	0.15	1.52	ELXQ3B1VSN391MQ40S
	1,200	30×45	0.15	2.84	ELXQ201VSN122MR45S		470	25.4×45	0.15	1.70	ELXQ3B1VSN471MQ45S

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/ 105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/ 105°C,120Hz)	Part No.
315	470	30×35	0.15	1.71	ELXQ3B1VSN471MR35S	400	470	30×45	0.15	1.81	ELXQ401VSN471MR45S
	470	35×30	0.15	1.82	ELXQ3B1VSN471MA30S		470	30×50	0.15	1.84	ELXQ401VSN471MR50S
	560	25.4×50	0.15	1.88	ELXQ3B1VSN561MQ50S		470	35×40	0.15	1.90	ELXQ401VSN471MA40S
	560	30×40	0.15	1.92	ELXQ3B1VSN561MR40S		560	35×45	0.15	2.12	ELXQ401VSN561MA45S
	560	30×45	0.15	1.97	ELXQ3B1VSN561MR45S		680	35×50	0.15	2.39	ELXQ401VSN681MA50S
	560	35×35	0.15	2.00	ELXQ3B1VSN561MA35S		100	22×25	0.20	0.66	ELXQ421VSN101MP25S
	680	30×50	0.15	2.21	ELXQ3B1VSN681MR50S	420	120	22×30	0.20	0.75	ELXQ421VSN121MP30S
	680	35×40	0.15	2.29	ELXQ3B1VSN681MA40S		120	25.4×25	0.20	0.77	ELXQ421VSN121MQ25S
	820	35×45	0.15	2.57	ELXQ3B1VSN821MA45S		150	22×35	0.20	0.86	ELXQ421VSN151MP35S
	1,000	35×50	0.15	2.89	ELXQ3B1VSN102MA50S		180	22×40	0.20	0.96	ELXQ421VSN181MP40S
350	120	22×25	0.15	0.72	ELXQ351VSN121MP25S		180	22×45	0.20	0.98	ELXQ421VSN181MP45S
	150	22×30	0.15	0.84	ELXQ351VSN151MP30S		180	25.4×30	0.20	0.97	ELXQ421VSN181MQ30S
	180	25.4×25	0.15	0.94	ELXQ351VSN181MQ25S		180	25.4×35	0.20	1.01	ELXQ421VSN181MQ35S
	220	22×35	0.15	1.04	ELXQ351VSN221MP35S		180	30×25	0.20	1.02	ELXQ421VSN221MA25S
	220	22×40	0.15	1.06	ELXQ351VSN221MP40S		220	22×50	0.20	1.11	ELXQ421VSN221MP50S
	220	25.4×30	0.15	1.07	ELXQ351VSN221MQ30S		220	25.4×40	0.20	1.14	ELXQ421VSN221MQ40S
	220	30×25	0.15	1.13	ELXQ351VSN221MR25S		220	30×30	0.20	1.14	ELXQ421VSN221MR30S
	270	22×45	0.15	1.20	ELXQ351VSN271MP45S		220	35×25	0.20	1.22	ELXQ421VSN221MA25S
	270	25.4×35	0.15	1.24	ELXQ351VSN271MQ35S		270	25.4×45	0.20	1.29	ELXQ421VSN271MQ45S
	270	30×30	0.15	1.27	ELXQ351VSN271MR30S		270	30×35	0.20	1.30	ELXQ421VSN271MR35S
	270	35×25	0.15	1.35	ELXQ351VSN271MA25S		270	35×30	0.20	1.38	ELXQ421VSN271MA30S
	330	22×50	0.15	1.36	ELXQ351VSN331MP50S		330	25.4×50	0.20	1.44	ELXQ421VSN331MQ50S
	330	25.4×40	0.15	1.39	ELXQ351VSN331MQ40S		330	30×40	0.20	1.48	ELXQ421VSN331MR40S
	330	30×35	0.15	1.43	ELXQ351VSN331MR35S		330	35×35	0.20	1.54	ELXQ421VSN331MA35S
	390	25.4×45	0.15	1.55	ELXQ351VSN391MQ45S		390	30×45	0.20	1.64	ELXQ421VSN391MR45S
	390	30×40	0.15	1.60	ELXQ351VSN391MR40S		390	35×40	0.20	1.73	ELXQ421VSN391MA40S
	390	35×30	0.15	1.66	ELXQ351VSN391MA30S		470	30×50	0.20	1.84	ELXQ421VSN471MR50S
	470	25.4×50	0.15	1.72	ELXQ351VSN471MQ50S		470	35×45	0.20	1.94	ELXQ421VSN471MA45S
	470	30×45	0.15	1.81	ELXQ351VSN471MR45S		560	35×50	0.20	2.17	ELXQ421VSN561MA50S
	470	35×35	0.15	1.83	ELXQ351VSN471MA35S	450	82	22×25	0.20	0.59	ELXQ451VSN820MP25S
400	560	30×50	0.15	2.00	ELXQ351VSN561MR50S		100	22×30	0.20	0.69	ELXQ451VSN101MP30S
	560	35×40	0.15	2.07	ELXQ351VSN561MA40S		100	25.4×25	0.20	0.70	ELXQ451VSN101MQ25S
	680	35×45	0.15	2.34	ELXQ351VSN681MA45S		120	22×35	0.20	0.77	ELXQ451VSN121MP35S
	820	35×50	0.15	2.62	ELXQ351VSN821MA50S		150	22×40	0.20	0.88	ELXQ451VSN151MP40S
	100	22×25	0.15	0.66	ELXQ401VSN101MP25S		150	22×45	0.20	0.90	ELXQ451VSN151MP45S
	120	22×30	0.15	0.75	ELXQ401VSN121MP30S		150	25.4×30	0.20	0.88	ELXQ451VSN151MQ30S
	150	22×35	0.15	0.86	ELXQ401VSN151MP35S		150	25.4×35	0.20	0.92	ELXQ451VSN151MQ35S
	150	25.4×25	0.15	0.86	ELXQ401VSN151MQ25S		150	30×25	0.20	0.93	ELXQ451VSN151MR25S
	180	22×40	0.15	0.96	ELXQ401VSN181MP40S		180	22×50	0.20	1.01	ELXQ451VSN181MP50S
	180	25.4×30	0.15	0.97	ELXQ401VSN181MQ30S		180	25.4×40	0.20	1.03	ELXQ451VSN181MQ40S
	180	30×25	0.15	1.02	ELXQ401VSN181MR25S		180	30×30	0.20	1.03	ELXQ451VSN181MR30S
	220	22×45	0.15	1.09	ELXQ401VSN221MP45S		180	35×25	0.20	1.10	ELXQ451VSN181MA25S
	220	25.4×35	0.15	1.12	ELXQ401VSN221MQ35S		220	25.4×45	0.20	1.16	ELXQ451VSN221MQ45S
	220	35×25	0.15	1.22	ELXQ401VSN221MA25S		220	30×35	0.20	1.17	ELXQ451VSN221MR35S
	270	22×50	0.15	1.23	ELXQ401VSN271MP50S		220	35×30	0.20	1.24	ELXQ451VSN221MA30S
	270	25.4×40	0.15	1.26	ELXQ401VSN271MQ40S		270	25.4×50	0.20	1.31	ELXQ451VSN271MQ50S
	270	25.4×45	0.15	1.29	ELXQ401VSN271MQ45S		270	30×40	0.20	1.33	ELXQ451VSN271MR40S
	270	30×30	0.15	1.27	ELXQ401VSN271MR30S		270	35×35	0.20	1.39	ELXQ451VSN271MA35S
	330	25.4×50	0.15	1.44	ELXQ401VSN331MQ50S		330	30×45	0.20	1.51	ELXQ451VSN331MR45S
	330	30×35	0.15	1.43	ELXQ401VSN331MR35S		390	30×50	0.20	1.67	ELXQ451VSN391MR50S
	330	35×30	0.15	1.52	ELXQ401VSN331MA30S		390	35×40	0.20	1.73	ELXQ451VSN391MA40S
	390	30×40	0.15	1.60	ELXQ401VSN391MR40S		390	35×45	0.20	1.77	ELXQ451VSN391MA45S
	390	35×35	0.15	1.67	ELXQ401VSN391MA35S		470	35×50	0.20	1.98	ELXQ451VSN471MA50S

◆RATED RIPPLE CURRENT MULTIPLIERS


●Frequency Multipliers

Frequency (Hz)	50	120	300	1k	10k	50k
160 to 250V _{dc}	0.81	1.00	1.17	1.32	1.45	1.50
315 to 450V _{dc}	0.77	1.00	1.16	1.30	1.41	1.43

The endurance of capacitors is shorted with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

LXG Series

- Endurance with ripple current : 5,000 hours at 105°C
- Non solvent-proof type
- RoHS Compliant




SPECIFICATIONS

Items	Characteristics									
Category	-40 to +105°C									
Temperature Range										
Rated Voltage Range	10 to 100V _{dc} (at 20°C, 120Hz)									
Capacitance Tolerance	±20% (M)									
Leakage Current	I=0.02CV or 3mA, whichever is smaller. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 5 minutes)									
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	10V	16V	25V	35V	50V	63V	80 & 100V		
	tanδ (Max.)	0.60	0.45	0.30	0.25	0.20	0.15	0.15	(at 20°C, 120Hz)	
Low Temperature Characteristics (Max. Impedance Ratio)	Capacitance change : Capacitance at the lowest operating temperature shall not be less than 70% of the 20°C value.									
	Rated voltage (V _{dc})	10V	16V	25V	35V	50V	63V	80 & 100V		
	Z(-25°C)/Z(+20°C)	4	4	3	3	2	2	2		
	Z(-40°C)/Z(+20°C)	15	15	10	8	6	6	5	(at 120Hz)	
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with rated ripple current is applied for 5,000 hours at 105°C.									
	Capacitance change	≤±25% of the initial value								
	D.F. (tanδ)	≤250% of the initial specified value								
	Leakage current	≤The initial specified value								
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 500 hours at 105°C without voltage applied.									
	Capacitance change	≤±20% of the initial value								
	D.F. (tanδ)	≤150% of the initial specified value								
	Leakage current	≤The initial specified value								

DIMENSIONS [mm]


- Terminal Code : VS (φ22 to φ35) : Standard

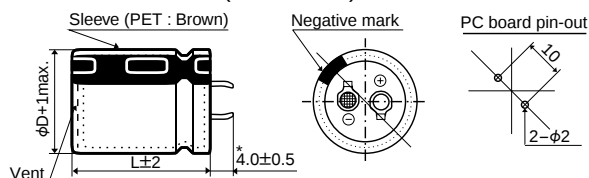


*φD=35mm : 3.5±0.5mm

No plastic disk is the standard design

- Terminal Code : LI (φ35)

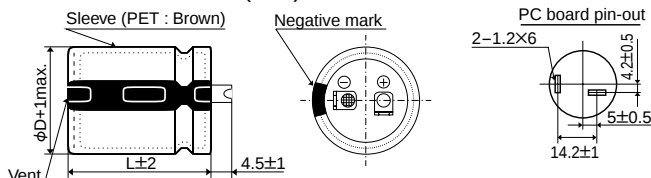

PART NUMBERING SYSTEM

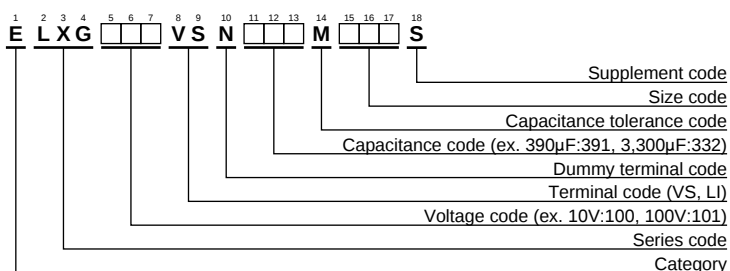

Please refer to "A guide to global code (snap-in type)"

RATED RIPPLE CURRENT MULTIPLIERS

- Frequency Multipliers

Frequency (Hz)	50	120	300	1k	10k	50k
10 to 50V _{dc}	0.95	1.00	1.03	1.05	1.08	1.08
63 to 100V _{dc}	0.92	1.00	1.07	1.13	1.19	1.20

The endurance of capacitors is shortened with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φDXL(mm)	tanδ	Rated ripple current (Arms/ 105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φDXL(mm)	tanδ	Rated ripple current (Arms/ 105°C,120Hz)	Part No.
10	6,800	22 × 25	0.60	1.30	ELXG100VSN682MP25S	35	5,600	25.4 × 35	0.25	1.98	ELXG350VSN562MQ35S
	10,000	22 × 30	0.60	1.65	ELXG100VSN103MP30S		5,600	30 × 30	0.25	1.98	ELXG350VSN562MR30S
	10,000	25.4 × 25	0.60	1.64	ELXG100VSN103MQ25S		5,600	35 × 25	0.25	2.03	ELXG350VSN562MA25S
	12,000	22 × 35	0.60	1.85	ELXG100VSN123MP35S		6,800	22 × 50	0.25	2.26	ELXG350VSN682MP50S
	12,000	25.4 × 30	0.60	1.85	ELXG100VSN123MQ30S		6,800	25.4 × 40	0.25	2.24	ELXG350VSN682MQ40S
	12,000	30 × 25	0.60	1.89	ELXG100VSN123MR25S		8,200	25.4 × 50	0.25	2.57	ELXG350VSN822MQ50S
	15,000	22 × 40	0.60	2.12	ELXG100VSN153MP40S		8,200	30 × 35	0.25	2.50	ELXG350VSN822MR35S
	15,000	25.4 × 35	0.60	2.16	ELXG100VSN153MQ35S		8,200	35 × 30	0.25	2.55	ELXG350VSN822MA30S
	18,000	22 × 50	0.60	2.45	ELXG100VSN183MP50S		10,000	30 × 40	0.25	2.86	ELXG350VSN103MR40S
	18,000	25.4 × 40	0.60	2.43	ELXG100VSN183MQ40S		10,000	35 × 35	0.25	2.88	ELXG350VSN103MA35S
	18,000	30 × 30	0.60	2.37	ELXG100VSN183MR30S		12,000	30 × 50	0.25	3.32	ELXG350VSN123MR50S
	18,000	35 × 25	0.60	2.42	ELXG100VSN183MA25S		12,000	35 × 40	0.25	3.30	ELXG350VSN123MA40S
	22,000	30 × 35	0.60	2.73	ELXG100VSN223MR35S		18,000	35 × 50	0.25	4.29	ELXG350VSN183MA50S
	22,000	35 × 30	0.60	2.79	ELXG100VSN223MA30S	50	1,500	22 × 25	0.20	1.02	ELXG500VSN182MP25S
	27,000	25.4 × 50	0.60	3.11	ELXG100VSN273MQ50S		1,800	22 × 30	0.20	1.17	ELXG500VSN182MP30S
	27,000	30 × 40	0.60	3.13	ELXG100VSN273MR40S		1,800	25.4 × 25	0.20	1.17	ELXG500VSN182MQ25S
	33,000	35 × 35	0.60	3.49	ELXG100VSN333MA35S		2,200	22 × 35	0.20	1.33	ELXG500VSN222MP35S
	39,000	30 × 50	0.60	3.99	ELXG100VSN393MR50S		2,700	22 × 40	0.20	1.51	ELXG500VSN272MP40S
	39,000	35 × 40	0.60	3.96	ELXG100VSN393MA40S		2,700	25.4 × 30	0.20	1.47	ELXG500VSN272MQ30S
	47,000	35 × 50	0.60	4.62	ELXG100VSN473MA50S		2,700	30 × 25	0.20	1.50	ELXG500VSN272MR25S
16	5,600	22 × 25	0.45	1.44	ELXG160VSN562MP25S		3,300	25.4 × 35	0.20	1.70	ELXG500VSN332MQ35S
	6,800	22 × 30	0.45	1.66	ELXG160VSN682MP30S		3,300	30 × 30	0.20	1.70	ELXG500VSN332MR30S
	6,800	25.4 × 25	0.45	1.66	ELXG160VSN682MQ25S		3,300	35 × 25	0.20	1.74	ELXG500VSN332MA25S
	8,200	22 × 35	0.45	1.87	ELXG160VSN822MP35S		3,900	22 × 50	0.20	1.91	ELXG500VSN392MP50S
	10,000	22 × 40	0.45	2.12	ELXG160VSN103MP40S		3,900	25.4 × 40	0.20	1.89	ELXG500VSN392MQ40S
	10,000	25.4 × 30	0.45	2.07	ELXG160VSN103MQ30S		4,700	30 × 35	0.20	2.11	ELXG500VSN472MR35S
	10,000	30 × 25	0.45	2.11	ELXG160VSN103MR25S		4,700	35 × 30	0.20	2.16	ELXG500VSN472MA30S
	12,000	25.4 × 35	0.45	2.37	ELXG160VSN123MQ35S		5,600	25.4 × 50	0.20	2.38	ELXG500VSN562MQ50S
	12,000	30 × 30	0.45	2.37	ELXG160VSN123MR30S		5,600	30 × 40	0.20	2.39	ELXG500VSN562MR40S
	12,000	35 × 25	0.45	2.42	ELXG160VSN123MA25S		5,600	35 × 35	0.20	2.41	ELXG500VSN562MA35S
	15,000	22 × 50	0.45	2.74	ELXG160VSN153MP50S		6,800	30 × 50	0.20	2.79	ELXG500VSN682MR50S
	15,000	25.4 × 40	0.45	2.71	ELXG160VSN153MQ40S		6,800	35 × 40	0.20	2.78	ELXG500VSN682MA40S
	18,000	25.4 × 50	0.45	3.11	ELXG160VSN183MQ50S	63	10,000	35 × 50	0.20	3.57	ELXG500VSN103MA50S
	18,000	30 × 35	0.45	3.02	ELXG160VSN183MR35S		1,000	22 × 25	0.15	1.00	ELXG630VSN122MP25S
	18,000	35 × 30	0.45	3.09	ELXG160VSN183MA30S		1,200	22 × 30	0.15	1.15	ELXG630VSN122MP30S
	22,000	30 × 40	0.45	3.46	ELXG160VSN223MR40S		1,200	25.4 × 25	0.15	1.15	ELXG630VSN122MQ25S
	22,000	35 × 35	0.45	3.49	ELXG160VSN223MA35S		1,500	22 × 35	0.15	1.32	ELXG630VSN152MP35S
	27,000	30 × 50	0.45	4.07	ELXG160VSN273MR50S		1,800	22 × 40	0.15	1.49	ELXG630VSN182MP40S
	27,000	35 × 40	0.45	4.04	ELXG160VSN273MA40S		1,800	25.4 × 30	0.15	1.45	ELXG630VSN182MQ30S
	39,000	35 × 50	0.45	5.16	ELXG160VSN393MA50S		1,800	30 × 25	0.15	1.48	ELXG630VSN182MR25S
25	3,900	22 × 25	0.30	1.31	ELXG250VSN392MP25S		2,200	25.4 × 35	0.15	1.67	ELXG630VSN222MQ35S
	4,700	22 × 30	0.30	1.51	ELXG250VSN472MP30S		2,200	30 × 30	0.15	1.68	ELXG630VSN222MR30S
	4,700	25.4 × 25	0.30	1.51	ELXG250VSN472MQ25S		2,200	35 × 25	0.15	1.71	ELXG630VSN222MA25S
	5,600	22 × 35	0.30	1.70	ELXG250VSN562MP35S		2,700	22 × 50	0.15	1.92	ELXG630VSN272MP50S
	6,800	22 × 40	0.30	1.92	ELXG250VSN682MP40S		2,700	25.4 × 40	0.15	1.90	ELXG630VSN272MQ40S
	6,800	25.4 × 30	0.30	1.87	ELXG250VSN682MQ30S		2,700	30 × 35	0.15	1.93	ELXG630VSN272MR35S
	6,800	30 × 25	0.30	1.90	ELXG250VSN682MR25S		3,300	25.4 × 50	0.15	2.20	ELXG630VSN332MQ50S
	8,200	25.4 × 35	0.30	2.14	ELXG250VSN822MQ35S		3,300	35 × 30	0.15	2.18	ELXG630VSN332MA30S
	8,200	30 × 30	0.30	2.15	ELXG250VSN822MR30S		3,900	30 × 40	0.15	2.41	ELXG630VSN392MR40S
	8,200	35 × 25	0.30	2.19	ELXG250VSN822MA25S		3,900	35 × 35	0.15	2.43	ELXG630VSN392MA35S
	10,000	22 × 50	0.30	2.45	ELXG250VSN103MP50S		4,700	30 × 50	0.15	2.80	ELXG630VSN472MR50S
	10,000	25.4 × 40	0.30	2.43	ELXG250VSN103MQ40S		4,700	35 × 40	0.15	2.78	ELXG630VSN472MA40S
	12,000	25.4 × 50	0.30	2.78	ELXG250VSN123MQ50S	80	6,800	35 × 50	0.15	3.55	ELXG630VSN682MA50S
	12,000	30 × 35	0.30	2.70	ELXG250VSN123MR35S		680	22 × 25	0.15	0.97	ELXG800VSN681MP25S
	12,000	35 × 30	0.30	2.76	ELXG250VSN123MA30S		820	22 × 30	0.15	1.12	ELXG800VSN821MP30S
	15,000	30 × 40	0.30	3.13	ELXG250VSN153MR40S		1,000	22 × 35	0.15	1.27	ELXG800VSN102MP35S
	15,000	35 × 35	0.30	3.16	ELXG250VSN153MA35S		1,000	25.4 × 25	0.15	1.23	ELXG800VSN102MQ25S
	18,000	30 × 50	0.30	3.64	ELXG250VSN183MR50S		1,200	22 × 40	0.15	1.42	ELXG800VSN122MP40S
	18,000	35 × 40	0.30	3.61	ELXG250VSN183MA40S		1,200	25.4 × 30	0.15	1.39	ELXG800VSN122MQ30S
	27,000	35 × 50	0.30	4.70	ELXG250VSN273MA50S		1,200	30 × 25	0.15	1.41	ELXG800VSN122MR25S
35	2,200	22 × 25	0.25	1.10	ELXG350VSN222MP25S		1,500	25.4 × 35	0.15	1.62	ELXG800VSN152MQ35S
	3,300	22 × 30	0.25	1.42	ELXG350VSN332MP30S		1,800	22 × 50	0.15	1.84	ELXG800VSN182MP50S
	3,300	25.4 × 25	0.25	1.41	ELXG350VSN332MQ25S		1,800	25.4 × 40	0.15	1.82	ELXG800VSN182MQ40S
	3,900	22 × 35	0.25	1.58	ELXG350VSN392MP35S		1,800	30 × 30	0.15	1.78	ELXG800VSN182MR30S
	3,900	25.4 × 30	0.25	1.58	ELXG350VSN392MQ30S		1,800	35 × 25	0.15	1.82	ELXG800VSN182MA25S
	4,700	22 × 40	0.25	1.78	ELXG350VSN472MP40S		2,200	25.4 × 50	0.15	2.11	ELXG800VSN222MQ50S
	4,700	30 × 25	0.25	1.77	ELXG350VSN472MR25S		2,200	30 × 35	0.15	2.05	ELXG800VSN222MR35S


◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/ 105°C,120Hz)	Part No.
80	2,200	35×30	0.15	2.09	ELXG800VSN222MA30S
	2,700	30×40	0.15	2.35	ELXG800VSN272MR40S
	2,700	35×35	0.15	2.37	ELXG800VSN272MA35S
	3,300	30×50	0.15	2.75	ELXG800VSN332MR50S
	3,300	35×40	0.15	2.73	ELXG800VSN332MA40S
	4,700	35×50	0.15	3.46	ELXG800VSN472MA50S
100	390	22×25	0.15	0.78	ELXG101VSN391MP25S
	560	22×30	0.15	0.99	ELXG101VSN561MP30S
	560	25.4×25	0.15	0.98	ELXG101VSN561MQ25S
	680	22×35	0.15	1.12	ELXG101VSN681MP35S
	820	22×40	0.15	1.26	ELXG101VSN821MP40S
	820	25.4×30	0.15	1.23	ELXG101VSN821MQ30S
	820	30×25	0.15	1.25	ELXG101VSN821MR25S
WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/ 105°C,120Hz)	Part No.
100	1,000	25.4×35	0.15	1.41	ELXG101VSN102MQ35S
	1,000	30×30	0.15	1.42	ELXG101VSN102MR30S
	1,000	35×25	0.15	1.45	ELXG101VSN102MA25S
	1,200	22×50	0.15	1.60	ELXG101VSN122MP50S
	1,200	25.4×40	0.15	1.59	ELXG101VSN122MQ40S
	1,200	30×35	0.15	1.61	ELXG101VSN122MR35S
	1,500	25.4×50	0.15	1.86	ELXG101VSN152MQ50S
	1,500	30×40	0.15	1.87	ELXG101VSN152MR40S
	1,500	35×30	0.15	1.85	ELXG101VSN152MA30S
	1,800	35×35	0.15	2.07	ELXG101VSN182MA35S
	2,200	30×50	0.15	2.40	ELXG101VSN222MR50S
	2,200	35×40	0.15	2.39	ELXG101VSN222MA40S
	2,700	35×50	0.15	2.81	ELXG101VSN272MA50S

◆MAXIMUM IMPEDANCE [mΩ/20°C, 30kHz]


Case size φD×L (mm)	V _{dc}	10 to 63	80	100
22×25		120	150	
22×30		100	120	
22×35		80	95	
22×40		70	80	
22×50		50	60	
25.4×25		90	110	
25.4×30		70	85	
25.4×35		60	70	
25.4×40		50	60	
25.4×50		40	45	
30×25		70	80	
30×30		50	60	
30×35		40	50	
30×40		35	40	
30×50		25	30	
35×25		65	70	
35×30		45	50	
35×35		38	40	
35×40		30	30	
35×50		23	25	

●105°C Endurance with Rated Ripple Current

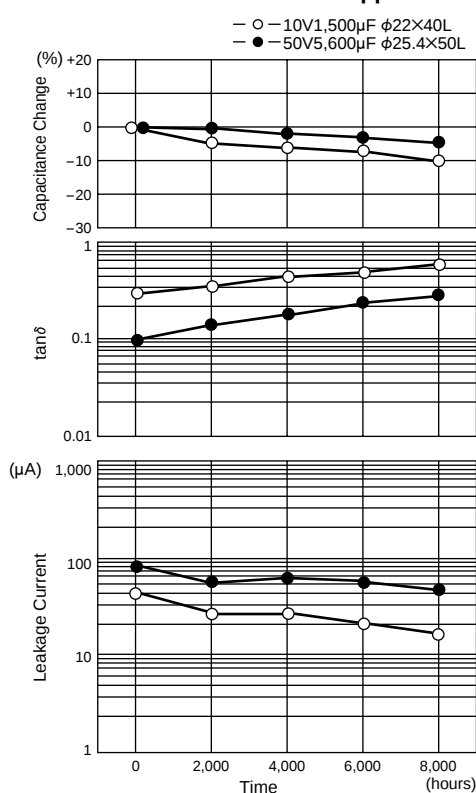

CHA Series

- No sparks against DC over-voltage
- Downsized from current KLG series
- Endurance with ripple current : 2,000 hours at 105°C
- Non solvent-proof type
- RoHS Compliant




SPECIFICATIONS

Items	Characteristics			
Category	-25 to +105°C			
Temperature Range				
Rated Voltage Range	200 & 400V _{dc}			
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)			
Leakage Current	I≤3√CV Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V _{dc}) (at 20°C after 5 minutes)			
Dissipation Factor (tanδ)	200V _{dc} : 0.15 max. (0.20 max. for ϕD=35mm) 400V _{dc} : 0.15 max. (at 20°C, 120Hz)			
Low Temperature Characteristics (Max.Impedance Ratio)	Rated Voltage (V _{dc})	200V	400V	(at 120Hz)
	Z(-25°C) / Z(+20°C)	4	4	
ESL	50nH max. (at 20°C, 1MHz)			
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 105°C.			
	Capacitance change	≤±20% of the initial value		
	D.F. (tanδ)	≤200% of the initial specified value		
	Leakage current	≤The initial specified value		
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.			
	Capacitance change	≤±15% of the initial value		
	D.F. (tanδ)	≤150% of the initial specified value		
	Leakage current	≤The initial specified value		


DIMENSIONS [mm]

- Terminal Code : VS (φ22 to φ35)

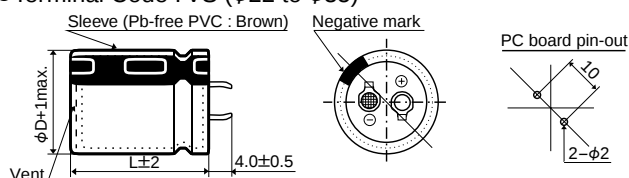

No plastic disk is the standard design

PART NUMBERING SYSTEM

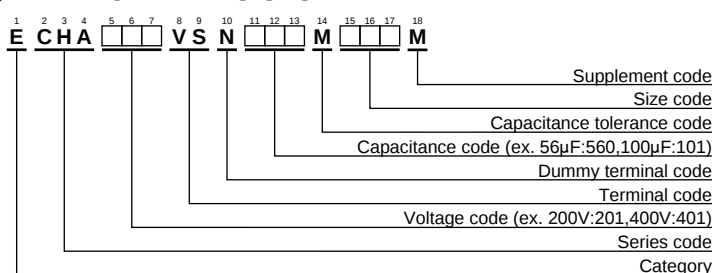

Please refer to "A guide to global code (snap-in type)"

RATED RIPPLE CURRENT MULTIPLIERS

- Frequency Multipliers

Frequency (Hz)	50	120	300	1k	10k	50k
200 & 400V _{dc}	0.77	1.00	1.16	1.30	1.41	1.43

The endurance of capacitors is shortened with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/ 105°C, 120Hz)	Part No.
200	180	22 × 20	0.15	0.82	ECHA201VSN181MP20M
	220	22 × 20	0.15	0.90	ECHA201VSN221MP20M
	270	22 × 25	0.15	1.02	ECHA201VSN271MP25M
	330	22 × 30	0.15	1.20	ECHA201VSN331MP30M
	330	25.4 × 25	0.15	1.20	ECHA201VSN331MQ25M
	390	22 × 30	0.15	1.35	ECHA201VSN391MP30M
	390	25.4 × 25	0.15	1.35	ECHA201VSN391MQ25M
	470	22 × 35	0.15	1.45	ECHA201VSN471MP35M
	470	25.4 × 30	0.15	1.45	ECHA201VSN471MQ30M
	470	30 × 25	0.15	1.47	ECHA201VSN471MR25M
	560	22 × 40	0.15	1.62	ECHA201VSN561MP40M
	560	25.4 × 30	0.15	1.60	ECHA201VSN561MQ30M
	560	30 × 25	0.15	1.60	ECHA201VSN561MR25M
	680	25.4 × 35	0.15	1.82	ECHA201VSN681MQ35M
	680	30 × 30	0.15	1.81	ECHA201VSN681MR30M
	680	35 × 25	0.20	1.86	ECHA201VSN681MA25M
	820	25.4 × 45	0.15	2.11	ECHA201VSN821MQ45M
	820	30 × 35	0.15	2.11	ECHA201VSN821MR35M
	820	35 × 25	0.20	2.11	ECHA201VSN821MA25M
	1,000	30 × 35	0.15	2.40	ECHA201VSN102MR35M
	1,000	35 × 30	0.20	2.40	ECHA201VSN102MA30M
400	1,200	30 × 45	0.15	2.69	ECHA201VSN122MR45M
	1,200	35 × 35	0.20	2.65	ECHA201VSN122MA35M
	56	22 × 20	0.15	0.45	ECHA401VSN560MP20M
	68	22 × 20	0.15	0.51	ECHA401VSN680MP20M
	82	22 × 25	0.15	0.58	ECHA401VSN820MP25M
	100	22 × 25	0.15	0.66	ECHA401VSN101MP25M
	100	25.4 × 25	0.15	0.66	ECHA401VSN101MQ25M
	120	22 × 30	0.15	0.76	ECHA401VSN121MP30M
	120	25.4 × 25	0.15	0.76	ECHA401VSN121MQ25M
	150	22 × 35	0.15	0.85	ECHA401VSN151MP35M
	150	25.4 × 30	0.15	0.85	ECHA401VSN151MQ30M
	150	30 × 25	0.15	0.85	ECHA401VSN151MR25M
400	180	22 × 40	0.15	0.94	ECHA401VSN181MP40M
	180	25.4 × 35	0.15	0.95	ECHA401VSN181MQ35M
	180	30 × 25	0.15	0.95	ECHA401VSN181MR25M
	220	25.4 × 35	0.15	1.24	ECHA401VSN221MQ35M
	220	30 × 30	0.15	1.24	ECHA401VSN221MR30M
	270	25.4 × 45	0.15	1.30	ECHA401VSN271MQ45M
	270	30 × 35	0.15	1.30	ECHA401VSN271MR35M
	270	35 × 25	0.15	1.30	ECHA401VSN271MA25M
	330	30 × 40	0.15	1.47	ECHA401VSN331MR40M
	330	35 × 30	0.15	1.47	ECHA401VSN331MA30M


◆DC OVERVOLTAGE TEST CONDITIONS

The vent will operate and the capacitor shall become an open circuit without burning materials when the following excess DC voltage is applied.

●Test DC voltage


Rated Voltage	Nominal Capacitance	Current Limit	Test Voltage
200V _{dc}	<330μF	4A	300/375V _{dc}
	330 ≤ C < 470μF	5A	
	≥ 470μF	7A	
400V _{dc}	<100μF	2A	500/600V _{dc}
	100 ≤ C < 220μF	4A	
	≥ 220μF	7A	

●Test Circuit

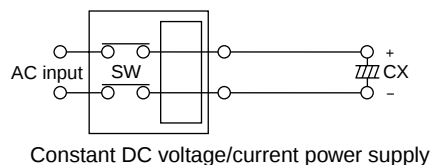

LXH Series

- No sparks against DC over-voltage
- Same case sizes of KMH
- Endurance with ripple current : 5,000 hours at 105°C
- Non solvent-proof type
- RoHS Compliant




SPECIFICATIONS

Items	Characteristics						
Category							
Temperature Range	-25 to +105°C						
Rated Voltage	200 & 400V _{dc}						
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)						
Leakage Current	I=0.02CV or 3mA, whichever is smaller. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 5 minutes)						
Dissipation Factor (tanδ)	0.15 max. (at 20°C, 120Hz)						
Low Temperature Characteristics	Z(-25°C) / Z(+20°C) ≤ 4 (at 120Hz)						
ESL	50nH max. (at 20°C, 1MHz)						
DC Overvoltage Test	When an excessive DC voltage is applied to the capacitors under the test conditions on next page, the vent shall operate and then the capacitors shall become open-circuit without burning materials.						
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 3,000 or 5,000 hours at 105°C. <table border="1"> <tr> <td>Capacitance change</td><td>≤ ±20% of the initial value</td></tr> <tr> <td>D.F. (tanδ)</td><td>≤ 200% of the initial specified value</td></tr> <tr> <td>Leakage current</td><td>≤ The initial specified value</td></tr> </table>	Capacitance change	≤ ±20% of the initial value	D.F. (tanδ)	≤ 200% of the initial specified value	Leakage current	≤ The initial specified value
Capacitance change	≤ ±20% of the initial value						
D.F. (tanδ)	≤ 200% of the initial specified value						
Leakage current	≤ The initial specified value						
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied. <table border="1"> <tr> <td>Capacitance change</td><td>≤ ±15% of the initial value</td></tr> <tr> <td>D.F. (tanδ)</td><td>≤ 150% of the initial specified value</td></tr> <tr> <td>Leakage current</td><td>≤ The initial specified value</td></tr> </table>	Capacitance change	≤ ±15% of the initial value	D.F. (tanδ)	≤ 150% of the initial specified value	Leakage current	≤ The initial specified value
Capacitance change	≤ ±15% of the initial value						
D.F. (tanδ)	≤ 150% of the initial specified value						
Leakage current	≤ The initial specified value						

DIMENSIONS [mm]


- Terminal Code : VS (φ22 to φ35)

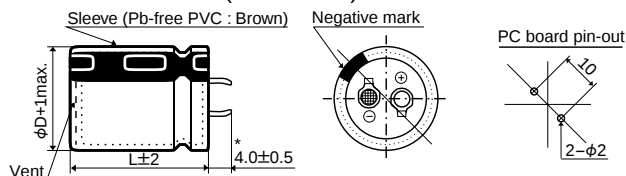

*φD=35mm : 3.5±0.5mm

No plastic disk is the standard design

PART NUMBERING SYSTEM

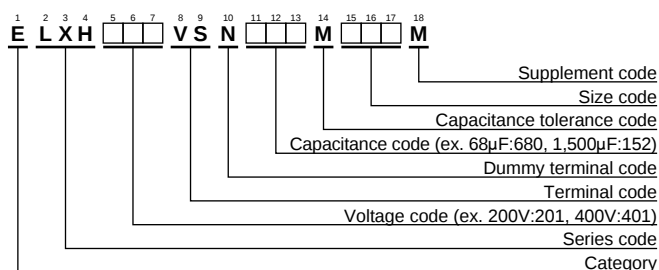

Please refer to "A guide to global code (snap-in type)"


RATED RIPPLE CURRENT MULTIPLIERS

- Frequency Multipliers

Frequency (Hz)	50	120	300	1k	10k	50k
200V _{dc}	0.81	1.00	1.17	1.32	1.45	1.50
400V _{dc}	0.77	1.00	1.16	1.30	1.41	1.43

The endurance of capacitors is shortened with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

105°C Endurance with Rated Ripple Current

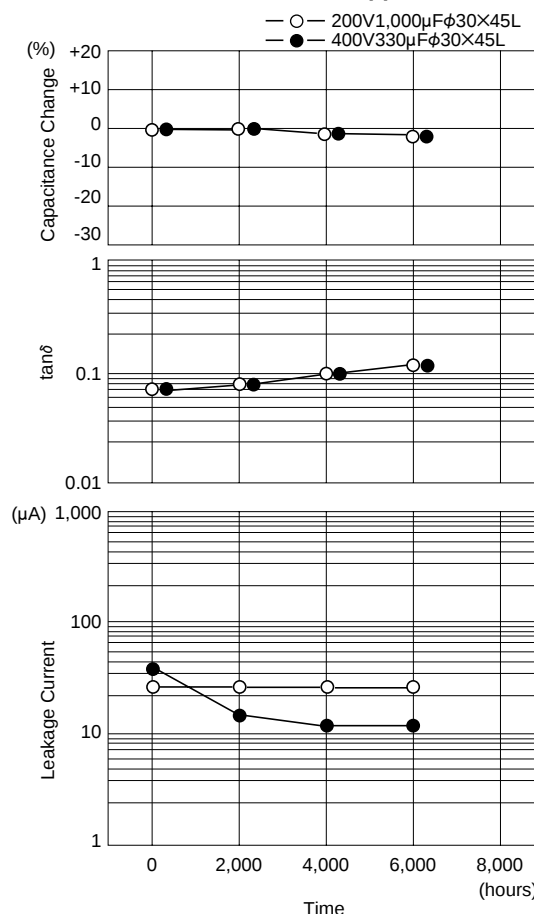

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/105°C,120Hz)		Part No.
				5,000 hours	3,000 hours	
200	270	22×25	0.15	0.45	0.87	ELXH201VSN271MP25M
	330	22×30	0.15	0.62	1.20	ELXH201VSN331MP30M
	330	25.4×25	0.15	0.62	1.21	ELXH201VSN331MQ25M
	390	22×35	0.15	0.67	1.31	ELXH201VSN391MP35M
	390	25.4×30	0.15	0.66	1.28	ELXH201VSN391MQ30M
	470	22×40	0.15	0.72	1.40	ELXH201VSN471MP40M
	470	25.4×30	0.15	0.72	1.41	ELXH201VSN471MQ30M
	470	30×25	0.15	0.77	1.50	ELXH201VSN471MR25M
	560	22×45	0.15	0.80	1.56	ELXH201VSN561MP45M
	560	25.4×35	0.15	0.78	1.53	ELXH201VSN561MQ35M
	560	30×30	0.15	0.81	1.57	ELXH201VSN561MR30M
	680	22×50	0.15	0.89	1.74	ELXH201VSN681MP50M
	680	25.4×40	0.15	0.89	1.74	ELXH201VSN681MQ40M
	680	30×30	0.15	0.89	1.74	ELXH201VSN681MR30M
	680	35×25	0.15	0.88	1.72	ELXH201VSN681MA25M
	820	25.4×50	0.15	1.05	2.04	ELXH201VSN821MQ50M
	820	30×35	0.15	1.03	2.00	ELXH201VSN821MR35M
	820	35×30	0.15	1.05	2.04	ELXH201VSN821MA30M
	1,000	30×45	0.15	1.18	2.30	ELXH201VSN102MR45M
	1,000	35×35	0.15	1.18	2.30	ELXH201VSN102MA35M
	1,200	30×50	0.15	1.33	2.60	ELXH201VSN122MR50M
	1,200	35×40	0.15	1.36	2.65	ELXH201VSN122MA40M
	1,500	35×45	0.15	1.57	3.08	ELXH201VSN152MA45M
400	68	22×25	0.15	0.26	0.51	ELXH401VSN680MP25M
	68	25.4×20	0.15	0.24	0.46	ELXH401VSN680MQ20M
	82	22×30	0.15	0.30	0.58	ELXH401VSN820MP30M
	82	25.4×25	0.15	0.30	0.58	ELXH401VSN820MQ25M
	100	22×35	0.15	0.34	0.66	ELXH401VSN101MP35M
	100	25.4×30	0.15	0.34	0.66	ELXH401VSN101MQ30M
	120	22×40	0.15	0.37	0.72	ELXH401VSN121MP40M
	120	25.4×30	0.15	0.37	0.72	ELXH401VSN121MQ30M
	120	30×25	0.15	0.39	0.76	ELXH401VSN121MR25M
	150	22×45	0.15	0.42	0.82	ELXH401VSN151MP45M
	150	25.4×35	0.15	0.43	0.84	ELXH401VSN151MQ35M
	150	30×30	0.15	0.43	0.84	ELXH401VSN151MR30M
	180	22×50	0.15	0.49	0.95	ELXH401VSN181MP50M
	180	25.4×40	0.15	0.48	0.94	ELXH401VSN181MQ40M
	180	30×30	0.15	0.47	0.92	ELXH401VSN181MR30M
	180	35×25	0.15	0.48	0.94	ELXH401VSN181MA25M
	220	25.4×45	0.15	0.55	1.07	ELXH401VSN221MQ45M
	220	30×35	0.15	0.54	1.06	ELXH401VSN221MR35M
	220	35×30	0.15	0.55	1.08	ELXH401VSN221MA30M
	270	25.4×50	0.15	0.62	1.21	ELXH401VSN271MQ50M
	270	30×40	0.15	0.62	1.21	ELXH401VSN271MR40M
	270	35×30	0.15	0.59	1.15	ELXH401VSN271MA30M
	330	30×45	0.15	0.71	1.39	ELXH401VSN331MR45M
	330	35×35	0.15	0.69	1.35	ELXH401VSN331MA35M
	390	30×50	0.15	0.80	1.55	ELXH401VSN391MR50M
	390	35×40	0.15	0.79	1.54	ELXH401VSN391MA40M
	470	35×45	0.15	0.89	1.74	ELXH401VSN471MA45M


◆DC OVERVOLTAGE TEST CONDITIONS

The vent will operate and the capacitor shall become an open circuit without burning materials when the following excess DC voltage is applied.

●Test DC voltage

Rated Voltage	Capacitance	Current limit	Test DC voltage
200Vdc	<330μF	4A	300/375Vdc
	330≤C<470μF	5A	
	≥470μF	7A	
400Vdc	<100μF	2A	500/600Vdc
	100≤C<220μF	4A	
	≥220μF	7A	

●Test Circuit

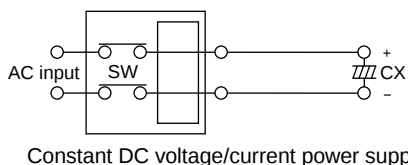

Appendix (Global code)


◆Capacitance code

* How to use the table

1st
2nd
Cap. Value

Capacitance value part

2nd	1st								
	1	2	3	4	5	6	7	8	9
0	10.0	20.0	30.0	40.0	50.0	60.0	70.0	80.0	90.0
A	10.5	20.5	30.5	40.5	50.5	60.5	70.5	80.5	90.5
1	11.0	21.0	31.0	41.0	51.0	61.0	71.0	81.0	91.0
B	11.5	21.5	31.5	41.5	51.5	61.5	71.5	81.5	91.5
2	12.0	22.0	32.0	42.0	52.0	62.0	72.0	82.0	92.0
C	12.5	22.5	32.5	42.5	52.5	62.5	72.5	82.5	92.5
3	13.0	23.0	33.0	43.0	53.0	63.0	73.0	83.0	93.0
D	13.5	23.5	33.5	43.5	53.5	63.5	73.5	83.5	93.5
4	14.0	24.0	34.0	44.0	54.0	64.0	74.0	84.0	94.0
E	14.5	24.5	34.5	44.5	54.5	64.5	74.5	84.5	94.5
5	15.0	25.0	35.0	45.0	55.0	65.0	75.0	85.0	95.0
F	15.5	25.5	35.5	45.5	55.5	65.5	75.5	85.5	95.5
6	16.0	26.0	36.0	46.0	56.0	66.0	76.0	86.0	96.0
G	16.5	26.5	36.5	46.5	56.5	66.5	76.5	86.5	96.5
7	17.0	27.0	37.0	47.0	57.0	67.0	77.0	87.0	97.0
H	17.5	27.5	37.5	47.5	57.5	67.5	77.5	87.5	97.5
8	18.0	28.0	38.0	48.0	58.0	68.0	78.0	88.0	98.0
J	18.5	28.5	38.5	48.5	58.5	68.5	78.5	88.5	98.5
9	19.0	29.0	39.0	49.0	59.0	69.0	79.0	89.0	99.0
K	19.5	29.5	39.5	49.5	59.5	69.5	79.5	89.5	99.5



For less than 10μF, a decimal point position is displayed with R.

For 10μF or more, capacitance code is set to the first 2 digits and index (1digit).

Treatment of fraction (Refer to the table)

Example of conversion

Real cap.	The first 2 digits	Treatment of fraction	Code		
			11th	12th	13th
10.0μF →	10.0 →	10.0 →	1	0	0
10.1μF →	10.1 →	10.0 →	1	0	0
10.2μF →	10.2 →	10.0 →	1	0	0
10.3μF →	10.3 →	10.5 →	1	A	0
10.4μF →	10.4 →	10.5 →	1	A	0
10.5μF →	10.5 →	10.5 →	1	A	0
10.6μF →	10.6 →	10.5 →	1	A	0
10.7μF →	10.7 →	10.5 →	1	A	0
10.8μF →	10.8 →	11.0 →	1	1	0
10.9μF →	10.9 →	11.0 →	1	1	0
11.0μF →	11.0 →	11.0 →	1	1	0
132μF →	13.2 →	13.0 →	1	3	1
133μF →	13.3 →	13.5 →	1	D	1
167μF →	16.7 →	16.5 →	1	G	1
168μF →	16.8 →	17.0 →	1	7	1
1110μF →	11.1 →	11.0 →	1	1	2
1340μF →	13.4 →	13.5 →	1	D	2
13200μF →	13.2 →	13.0 →	1	3	3
13600μF →	13.6 →	13.5 →	1	D	3
270000μF →	27.0 →	27.0 →	2	7	4

◆Case length (Radial lead type)

Case length [mm]	16th	17th
0.0	—	—
0.1	0	B
0.2	0	C
0.3	0	D
0.4	0	E
0.5	0	F
0.6	0	G
0.7	0	H
0.8	0	J
0.9	0	K

Case length [mm]	16th	17th
1.0	0	1
1.1	1	B
1.2	1	C
1.3	1	D
1.4	1	E
1.5	1	F
1.6	1	G
1.7	1	H
1.8	1	J
1.9	1	K

Case length [mm]	16th	17th
2.0	0	2
2.1	2	B
2.2	2	C
2.3	2	D
2.4	2	E
2.5	2	F
2.6	2	G
2.7	2	H
2.8	2	J
2.9	2	K

Case length [mm]	16th	17th
3.0	0	3
3.1	3	B
3.2	3	C
3.3	3	D
3.4	3	E
3.5	3	F
3.6	3	G
3.7	3	H
3.8	3	J
3.9	3	K

Case length [mm]	16th	17th
4.0	0	4
4.1	4	B
4.2	4	C
4.3	4	D
4.4	4	E
4.5	4	F
4.6	4	G
4.7	4	H
4.8	4	J
4.9	4	K

Case length [mm]	16th	17th
5.0	0	5
5.1	5	B
5.2	5	C
5.3	5	D
5.4	5	E
5.5	5	F
5.6	5	G
5.7	5	H
5.8	5	J
5.9	5	K

Case length [mm]	16th	17th
6.0	0	6
6.1	6	B
6.2	6	C
6.3	6	D
6.4	6	E
6.5	6	F
6.6	6	G
6.7	6	H
6.8	6	J
6.9	6	K

Case length [mm]	16th	17th
7.0	0	7
7.1	7	B
7.2	7	C
7.3	7	D
7.4	7	E
7.5	7	F
7.6	7	G
7.7	7	H
7.8	7	J
7.9	7	K

Case length [mm]	16th	17th
8.0	0	8
8.1	8	B
8.2	8	C
8.3	8	D
8.4	8	E
8.5	8	F
8.6	8	G
8.7	8	H
8.8	8	J
8.9	8	K

Case length [mm]	16th	17th
9.0	0	9
9.1	9	B
9.2	9	C
9.3	9	D
9.4	9	E
9.5	9	F
9.6	9	G
9.7	9	H
9.8	9	J
9.9	9	K

Case length [mm]	16th	17th
10.0	1	0
10.1	A	1
10.2	A	2
10.3	A	3
10.4	A	4
10.5	A	5
10.6	A	6
10.7	A	7
10.8	A	8
10.9	A	9

Case length [mm]	16th	17th
11.0	1	1
11.1	B	1
11.2	B	2
11.3	B	3
11.4	B	4
11.5	B	5
11.6	B	6
11.7	B	7
11.8	B	8
11.9	B	9

Case length [mm]	16th	17th
12.0	1	2
12.1	C	1
12.2	C	2
12.3	C	3
12.4	C	4
12.5	C	5
12.6	C	6
12.7	C	7
12.8	C	8
12.9	C	9

Case length [mm]	16th	17th
13.0	1	3
13.1	D	1
13.2	D	2
13.3	D	3
13.4	D	4
13.5	D	5
13.6	D	6
13.7	D	7
13.8	D	8
13.9	D	9

Case length [mm]	16th	17th
14.0	1	4
14.1	E	1
14.2	E	2
14.3	E	3
14.4	E	4
14.5	E	5
14.6	E	6
14.7	E	7
14.8	E	8
14.9	E	9

Case length [mm]	16th	17th	Case length [mm]	16th	17th	Case length [mm]	16th	17th	Case length [mm]	16th	17th	Case length [mm]	16th	17th
15.0	1	5	16.0	1	6	17.0	1	7	18.0	1	8	19.0	1	9
15.1	F	1	16.1	G	1	17.1	H	1	18.1	J	1	19.1	K	1
15.2	F	2	16.2	G	2	17.2	H	2	18.2	J	2	19.2	K	2
15.3	F	3	16.3	G	3	17.3	H	3	18.3	J	3	19.3	K	3
15.4	F	4	16.4	G	4	17.4	H	4	18.4	J	4	19.4	K	4
15.5	F	5	16.5	G	5	17.5	H	5	18.5	J	5	19.5	K	5
15.6	F	6	16.6	G	6	17.6	H	6	18.6	J	6	19.6	K	6
15.7	F	7	16.7	G	7	17.7	H	7	18.7	J	7	19.7	K	7
15.8	F	8	16.8	G	8	17.8	H	8	18.8	J	8	19.8	K	8
15.9	F	9	16.9	G	9	17.9	H	9	18.9	J	9	19.9	K	9

Case length [mm]	16th	17th	Case length [mm]	16th	17th	Case length [mm]	16th	17th	Case length [mm]	16th	17th	Case length [mm]	16th	17th
20.0	2	0	30.0	3	0	40.0	4	0	50.0	5	0	60.0	6	0
20.5	L	1	30.5	N	1	40.5	Q	1	50.5	S	1	60.5	U	1
21.0	2	1	31.0	3	1	41.0	4	1	51.0	5	1	61.0	6	1
21.5	L	3	31.5	N	3	41.5	Q	3	51.5	S	3	61.5	U	3
22.0	2	2	32.0	3	2	42.0	4	2	52.0	5	2	62.0	6	2
22.5	L	5	32.5	N	5	42.5	Q	5	52.5	S	5	62.5	U	5
23.0	2	3	33.0	3	3	43.0	4	3	53.0	5	3	63.0	6	3
23.5	L	7	33.5	N	7	43.5	Q	7	53.5	S	7	63.5	U	7
24.0	2	4	34.0	3	4	44.0	4	4	54.0	5	4	64.0	6	4
24.5	L	9	34.5	N	9	44.5	Q	9	54.5	S	9	64.5	U	9
25.0	2	5	35.0	3	5	45.0	4	5	55.0	5	5	65.0	6	5
25.5	M	1	35.5	P	1	45.5	R	1	55.5	T	1	65.5	V	1
26.0	2	6	36.0	3	6	46.0	4	6	56.0	5	6	66.0	6	6
26.5	M	3	36.5	P	3	46.5	R	3	56.5	T	3	66.5	V	3
27.0	2	7	37.0	3	7	47.0	4	7	57.0	5	7	67.0	6	7
27.5	M	5	37.5	P	5	47.5	R	5	57.5	T	5	67.5	V	5
28.0	2	8	38.0	3	8	48.0	4	8	58.0	5	8	68.0	6	8
28.5	M	7	38.5	P	7	48.5	R	7	58.5	T	7	68.5	V	7
29.0	2	9	39.0	3	9	49.0	4	9	59.0	5	9	69.0	6	9
29.5	M	9	39.5	P	9	49.5	R	9	59.5	T	9	69.5	V	9

Case length [mm]	16th	17th	Case length [mm]	16th	17th
70.0	7	0	80.0	8	0
70.5	W	1	80.5	Y	1
71.0	7	1	81.0	8	1
71.5	W	3	81.5	Y	3
72.0	7	2	82.0	8	2
72.5	W	5	82.5	Y	5
73.0	7	3	83.0	8	3
73.5	W	7	83.5	Y	7
74.0	7	4	84.0	8	4
74.5	W	9	84.5	Y	9
75.0	7	5	85.0	8	5
75.5	X	1	85.5	Z	1
76.0	7	6	86.0	8	6
76.5	X	3	86.5	Z	3
77.0	7	7	87.0	8	7
77.5	X	5	87.5	Z	5
78.0	7	8	88.0	8	8
78.5	X	7	88.5	Z	7
79.0	7	9	89.0	8	9
79.5	X	9	89.5	Z	9

◆Case length (Snap-in type / Screw mount terminal type)

Case length [mm]	16th	17th	Case length [mm]	16th	17th	Case length [mm]	16th	17th	Case length [mm]	16th	17th	Case length [mm]	16th	17th
20	2	0	30	3	0	40	4	0	50	5	0	60	6	0
21	2	1	31	3	1	41	4	1	51	5	1	61	6	1
22	2	2	32	3	2	42	4	2	52	5	2	62	6	2
23	2	3	33	3	3	43	4	3	53	5	3	63	6	3
24	2	4	34	3	4	44	4	4	54	5	4	64	6	4
25	2	5	35	3	5	45	4	5	55	5	5	65	6	5
26	2	6	36	3	6	46	4	6	56	5	6	66	6	6
27	2	7	37	3	7	47	4	7	57	5	7	67	6	7
28	2	8	38	3	8	48	4	8	58	5	8	68	6	8
29	2	9	39	3	9	49	4	9	59	5	9	69	6	9

Case length [mm]	16th	17th	Case length [mm]	16th	17th	Case length [mm]	16th	17th	Case length [mm]	16th	17th	Case length [mm]	16th	17th
70	7	0	80	8	0	90	9	0	100	A	0	110	B	0
71	7	1	81	8	1	91	9	1	101	A	1	111	B	1
72	7	2	82	8	2	92	9	2	102	A	2	112	B	2
73	7	3	83	8	3	93	9	3	103	A	3	113	B	3
74	7	4	84	8	4	94	9	4	104	A	4	114	B	4
75	7	5	85	8	5	95	9	5	105	A	5	115	B	5
76	7	6	86	8	6	96	9	6	106	A	6	116	B	6
77	7	7	87	8	7	97	9	7	107	A	7	117	B	7
78	7	8	88	8	8	98	9	8	108	A	8	118	B	8
79	7	9	89	8	9	99	9	9	109	A	9	119	B	9

Case length [mm]	16th	17th	Case length [mm]	16th	17th	Case length [mm]	16th	17th	Case length [mm]	16th	17th	Case length [mm]	16th	17th
120	C	0	130	D	0	140	E	0	150	F	0	160	G	0
121	C	1	131	D	1	141	E	1	151	F	1	161	G	1
122	C	2	132	D	2	142	E	2	152	F	2	162	G	2
123	C	3	133	D	3	143	E	3	153	F	3	163	G	3
124	C	4	134	D	4	144	E	4	154	F	4	164	G	4
125	C	5	135	D	5	145	E	5	155	F	5	165	G	5
126	C	6	136	D	6	146	E	6	156	F	6	166	G	6
127	C	7	137	D	7	147	E	7	157	F	7	167	G	7
128	C	8	138	D	8	148	E	8	158	F	8	168	G	8
129	C	9	139	D	9	149	E	9	159	F	9	169	G	9

Case length [mm]	16th	17th	Case length [mm]	16th	17th	Case length [mm]	16th	17th	Case length [mm]	16th	17th	Case length [mm]	16th	17th
170	H	0	180	J	0	190	K	0	200	L	0	210	M	0
171	H	1	181	J	1	191	K	1	201	L	1	211	M	1
172	H	2	182	J	2	192	K	2	202	L	2	212	M	2
173	H	3	183	J	3	193	K	3	203	L	3	213	M	3
174	H	4	184	J	4	194	K	4	204	L	4	214	M	4
175	H	5	185	J	5	195	K	5	205	L	5	215	M	5
176	H	6	186	J	6	196	K	6	206	L	6	216	M	6
177	H	7	187	J	7	197	K	7	207	L	7	217	M	7
178	H	8	188	J	8	198	K	8	208	L	8	218	M	8
179	H	9	189	J	9	199	K	9	209	L	9	219	M	9

Case length [mm]	16th	17th	Case length [mm]	16th	17th	Case length [mm]	16th	17th	Case length [mm]	16th	17th
220	N	0	230	P	0	240	Q	0	250	R	0
221	N	1	231	P	1	241	Q	1	251	R	1
222	N	2	232	P	2	242	Q	2	252	R	2
223	N	3	233	P	3	243	Q	3	253	R	3
224	N	4	234	P	4	244	Q	4	254	R	4
225	N	5	235	P	5	245	Q	5	255	R	5
226	N	6	236	P	6	246	Q	6	256	R	6
227	N	7	237	P	7	247	Q	7	257	R	7
228	N	8	238	P	8	248	Q	8	258	R	8
229	N	9	239	P	9	249	Q	9	259	R	9

◆Supplement code

Surface mount type / Conductive polymer (Include Radial lead type)

	Terminal plating material (Radial lead type)		
	Sn100%	Sn-Bi	Sn-Pb
Coating case	S	G	N

Radial lead type / Snap-in type

		Terminal plating material (Radial lead type)		
		Sn100%	Sn-Bi	Sn-Pb
Outer sleeve	PET	S	D	C
	Coating case	H	G	F
	Polyolefin	L	—	—
	Pb-free PVC	M	—	N
	PVC	B	A	N

* Pb-free snap-in type does not have top disk.

We also produce Pb-free snap-in type with "Top disk, Pb-free PVC sleeve and Sn100% terminal plating".

In this case, supplement code (the 18th digit) becomes "T".

Screw mount terminal type

	Screw terminal
Pb-free PVC	M
Polyolefin	S
PET	C
PVC	N