


238

Wannenstecker mit Verriegelung - RM 2,00 mm - gerade / gewinkelt

Pin-Header with Box and Latches - Pitch 2,00 mm - Straight / Right Angled


Technische Daten / Technical Data

Isolierkörper	thermoplastischer Polyester, nach UL94V0
Insulator	Thermoplastic Polyester, rated UL94V0
Kontaktmaterial	Phosphorbronze
Contact Material	Phosphorbronze
Nennstrom	1 A
Current Rating	
Nennspannung	500 V _{AC}
Voltage Rating	
Durchgangswiderstand	max. 30 mOhm
Contact Resistance	
Isolationswiderstand	1000 MOhm
Insulation Resistance	
Temperaturbereich	-65°C ... +150°C
Temperature Range	

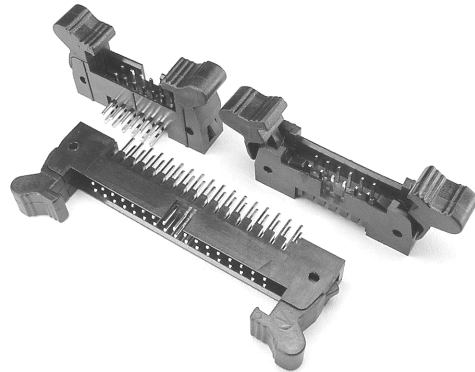

© W+P PRODUCTS

Passender Gegenstecker Serie:
Mates with Series:
343

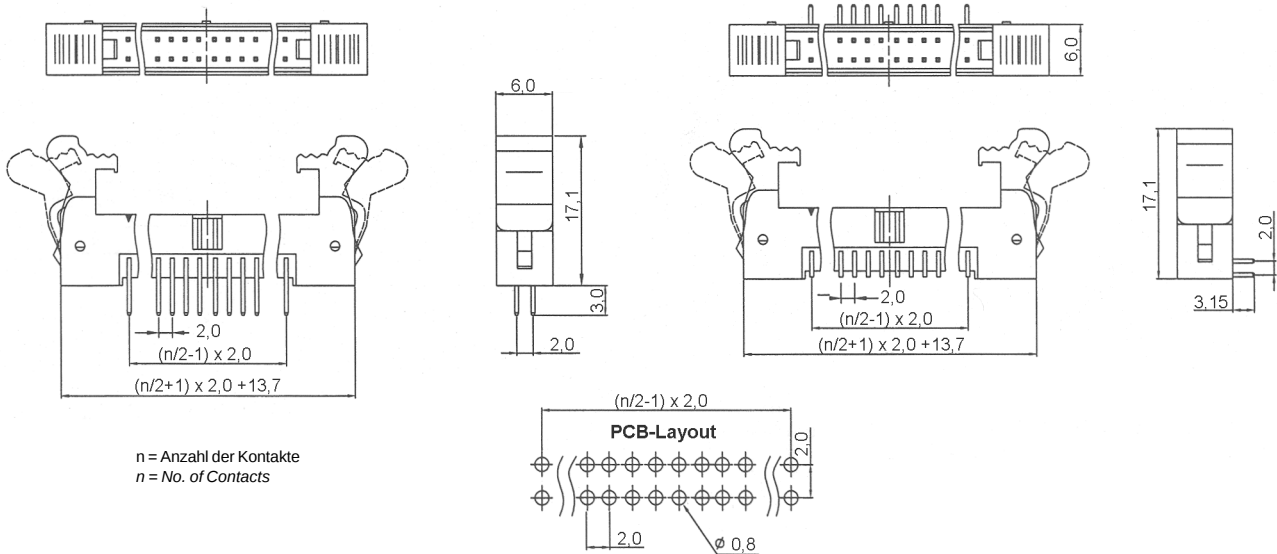

Series	Contacts*	Type*	Plating
238	20	1	00
	10/12/14/16/20/22/24/26/ 30/32/34/40/44/50/68-pol.	1 = gerade straight 2 = gewinkelt right angled	00 = vergoldet gold plated

(* Bestellbeispiel - Bitte durch Ihre Spezifikationen ersetzen.
* Order example - To be replaced by your specifications.)

TEL.: +49 5223 98507-0
FAX : +49 5223 98507-50

W+P PRODUCTS

E-MAIL: sales@wppro.com
INTERNET: www.wppro.com