

F

E

D

C

B

A

F





E

D

C

B

A

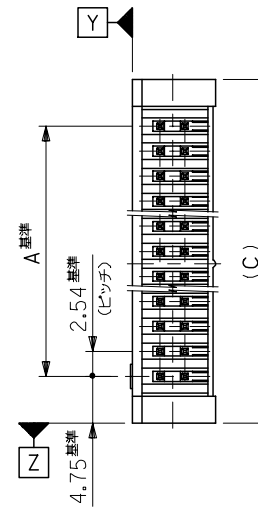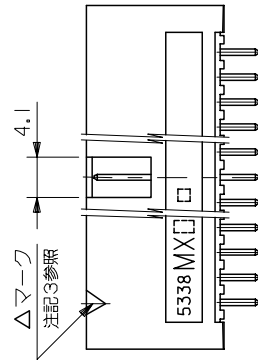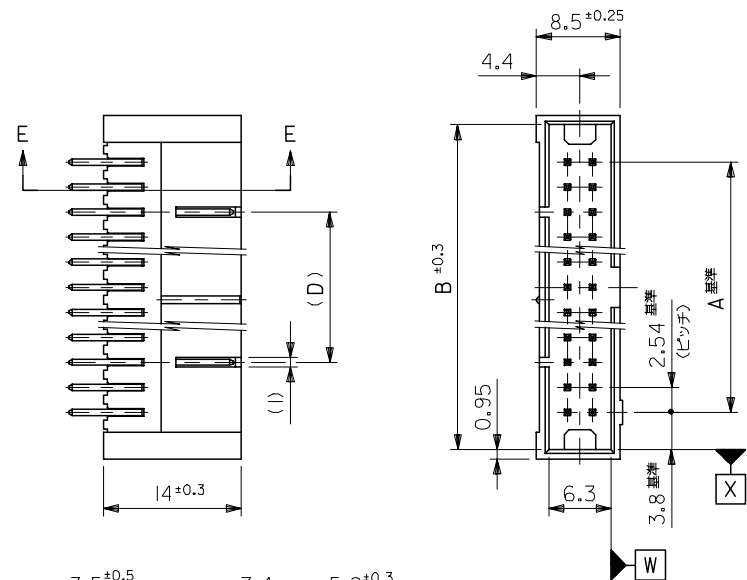

SECT. E-E
(SCALE 3-1)

注記

- 材料 ウエハー : ガラス繊維 I5% 入り PBTP (UL94V-0), 黒色
ピン : 黄銅, サイズ □0.635
- 嵌合相手 : 5320 シリーズ
- 使用符号の説明


5332 - N *
ベースナンバー
極数
ピンのメッキコード

コード:*	△マークの色	コンタクト部	半田付け部	下地メッキ
GS1	黄	金 0.1μm MIN.	半田 3μm MIN.	ニッケル 1μm MIN.
GS3	青	金 0.25μm MIN.	錫 1μm MIN.	
LEAD-FREE GS17F	黄	金 0.1μm MIN.	錫 1μm MIN.	ニッケル 0.5μm MIN.
LEAD-FREE GS37F	青	金 0.25μm MIN.	錫 1μm MIN.	
LEAD-FREE T2	黒	錫 1μm MIN.	錫 1μm MIN.	ニッケル 0.5μm MIN.

60	73.66	81.26	83.16	63.50
50	60.96	68.56	70.46	50.80
40	48.26	55.86	57.76	38.10
34	40.64	48.24	50.14	30.48
30	35.56	43.16	45.06	25.40
26	30.48	38.08	39.98	—
20	22.86	30.46	32.36	—
16	17.78	25.38	27.28	—
14	15.24	22.84	24.74	—
10	10.16	17.76	19.66	—
極数	A 寸法	B 寸法	C 寸法	D 寸法

REVISED EC NO: J2006-0712 DRAWN: YANAGI MOTO 2005/10/03 CHKD: MTANAKA 2005/10/06 APPR: NUKITA 2005/10/14	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
		10 UNDER	± 0.2	DRAWN BY H. HIRAMOTO	DATE 1990/06/19	TITLE QIK FLECS WAFER ASSY ST JAPANESE ONLY			
		10 OVER 30 UNDER	± 0.25	CHECKED BY M. SASAO	DATE				
		30 OVER	± 0.3	APPROVED BY H. IKESUGI	DATE	MOLEX INCORPORATED			
	H	REV	ANGULAR ±3 °		MATERIAL NO. SEE SHEET 2 OF 2		DOCUMENT NO. SD-5332-001		SHEET NO. 1 OF 2
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

[illegible]



[illegible]